

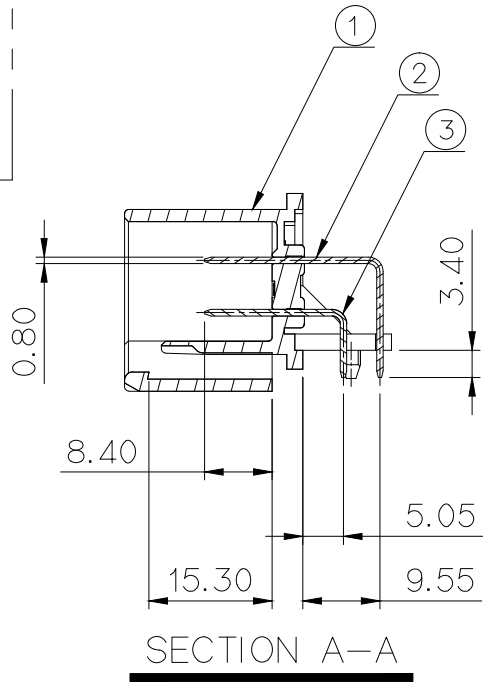
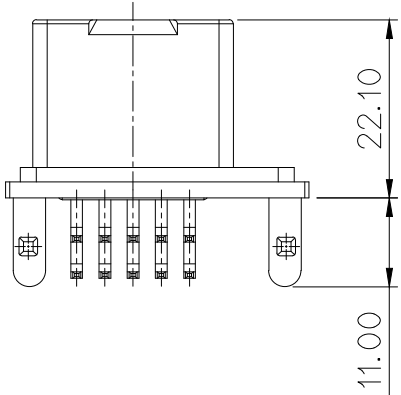



ISO VIEW





SECTION A-A

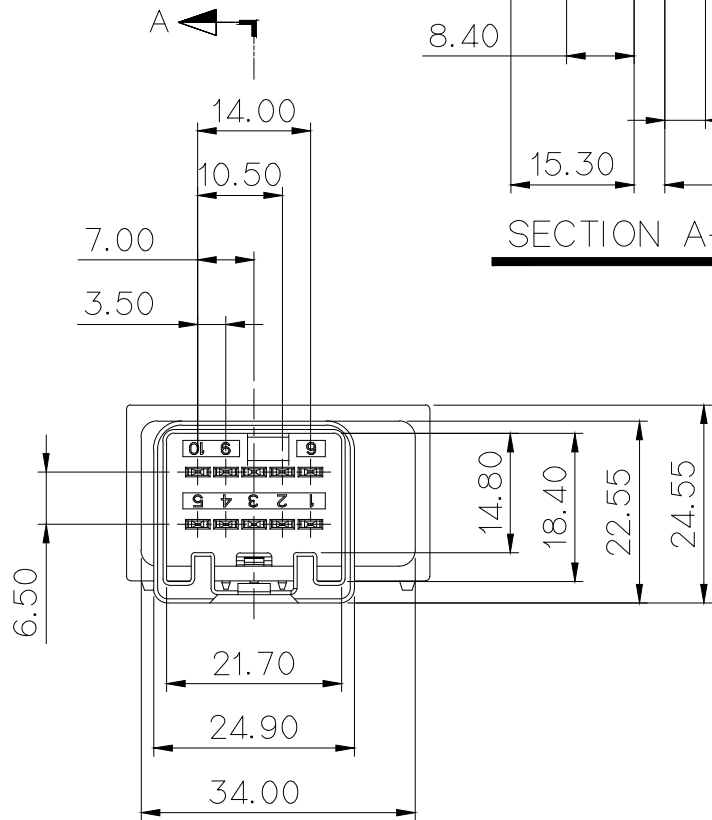

GENERAL TOLERANCE (TERMINAL)						GENERAL TOLERANCE (HOUSING)							USED ON
10 MAX	20 MAX	45 MAX	45 VR	ANGLE	ECCENT	10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT	
±0.2	±0.25	±0.3	±0.5	±30'	0.1	±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	

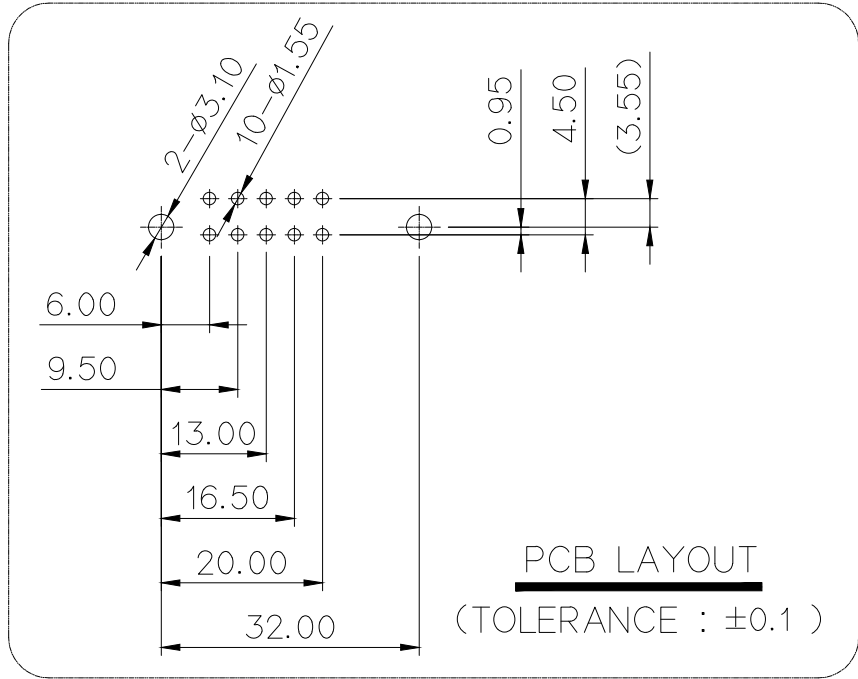

PCB LAYOUT
(TOLERANCE : ±0.1)

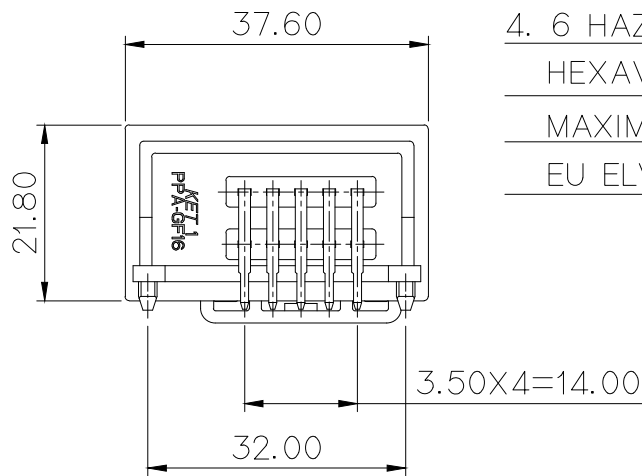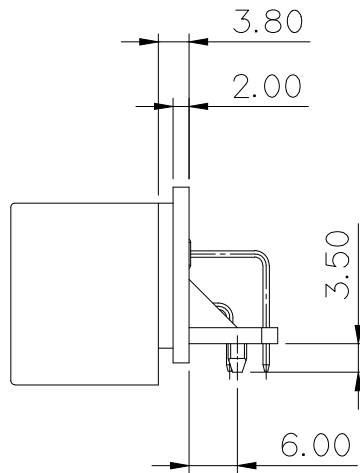

주 기

- 기능상 유해한 BURR등 변형이 없을것.
- 적용 FEMALE HOUSING : MG655347
- △3. MG645395-5F 단자 주석 도금 - TYPE A Sn(무광택), (MS915-01) Ni 하지 도금 + Sn(무광) + Reflow
- 제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬,PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

NOTE

- MUST BE FREE OF FLASH, SINK AND IMPERFECTION THAT AFFECT FUNCTION.
- MATING FEMALE HOUSING : MG655347
- △3. MG645395-5F TIN-PLATED TERMINAL - TYPE A Sn(MATTE), (MS915-01) Ni-PLATED UNDER + Sn(MATTE) + Reflow
- 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD,MERCURY,CADMIUM, HEXAVALENT,CHROMIUM,PBBs,PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

NO.	ASSY NO.	구성품 내역					
		NO.	PART NO.	PART NAME	MATERIAL	FINSH	Q'TY
1	MG645395-5	1	MG675396-5	SRF 060 10M PCB HS'G	PPA-GF16	BLACK	1 EA
		2	ST792358-2	060 PCB MALE TM'L (L)	BRASS	Sn 후도금-유광	5 EA
		3	ST792359-2	060 PCB MALE TM'L (S)			5 EA
△ 2	MG645395-5F	1	MG675396-5	SRF 060 10M PCB HS'G	PPA-GF16	BLACK	1 EA
		2	ST793374-2	060 PCB MALE TM'L (L)	BRASS	Sn 후도금-무광 (Reflow)	5 EA
		3	ST793375-2	060 PCB MALE TM'L (S)			5 EA

APPROVED

2016-02-26

KOREA ELECTRIC
TERMINAL CO., LTD.
Korea Electric Te
rminal Co., LTD.

ISSUE MARK

						MATERIAL	SEE TABLE	 KOREA ELECTRIC TERMINAL CO., LTD.	
						FINISH	SEE TABLE		
						WIRE RANGE		CLASS	060
						INSULATION		TYPE	
△	ECO-1511-391 근거 도면 재작성	JY.K	CSH	LSY	26.NOV.'15	INSULATION		TYPE	
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SEE TABLE	SCALE 1/1	PART NO. △ SEE TABLE
DR.	JDR '12.07.19	CHK.			7/20	PART NAME	SRF 060 10M PCB ASSY		
CHK.					7/20	APP.			