

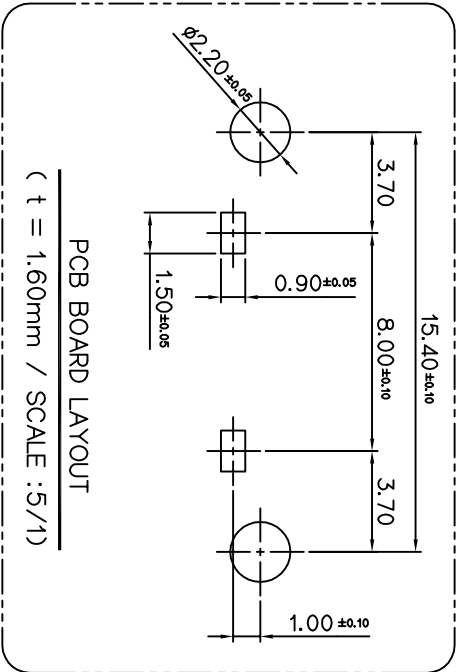




GENERAL TOLERANCE (HOUSING)				USED ON
10MAX	20MAX	45MAX	ANGLE	ECCENT
±0.2	±0.25	±0.3	±30°	0.1

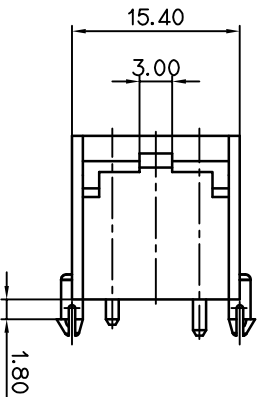

NO.	MATERIAL	COLOR
0	PA66	NATURAL
1		RED
2		BLUE
3		YELLOW
5		BLACK

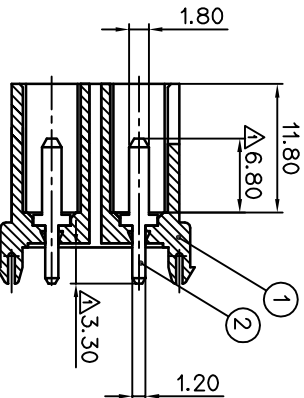

SECTION A-A'

NOTE

- MUST BE FREE OF BURR, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
- APPLICABLE HOUSING : MG615468
- HAZARDOUS SUBSTANCES IN PARTS (Lead, Mercury, Cadmium, Hexavalent Chromium, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION

NO.	PART NAME	PART NO.	MATERIAL	Q'TY
1	1806 PCB 2M HSG	MG615469	PA66/V2	1
2	1806 PCB TAB TERMINAL	ST792381-3	BRASS	2

- 주 기
- 기능상 유해한 BURR 및 WELDLINE등이 없음.
 - 적용 하우징 : MG615468
 - 제품 내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가 크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용농도를 초과해서는 안 된다.

				MATERIAL SEE TABLE		KEIT KOREA ELECTRIC	
				FINISH SEE TABLE		ENGINEERED TERMINAL CO., LTD.	
				WIRE RANGE		CLASS	
				INSULATION		TYPE PCB	
				SCALE		PART NO. M0645470	
				SEE TABLE 2/1			
PART NAME				1806 PCB 2P ASS'Y_P=8mm			
DR. PUM '11. 01. 19				CHK. <i>z/f/s</i>			
CHK.				APP. <i>yss</i>			
Δ ECO-1205-1662기 도관 개작				P.M. <i>z/f/s</i> 12.05.24			
LTR		REVISION RECORD		DR. CHK.		APP. DATE	