


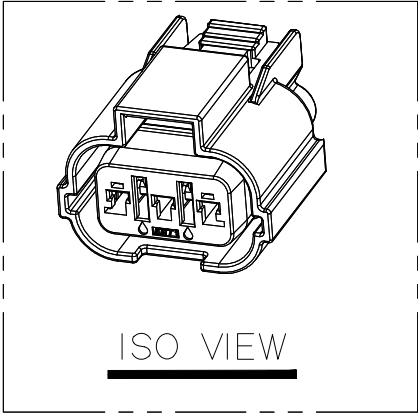
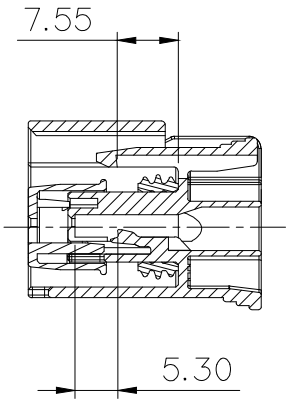

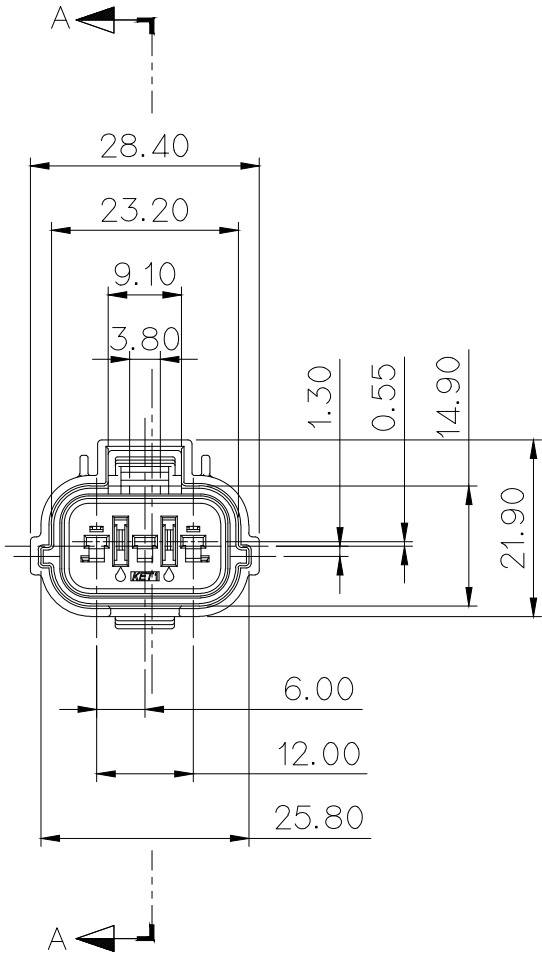




ISO VIEW

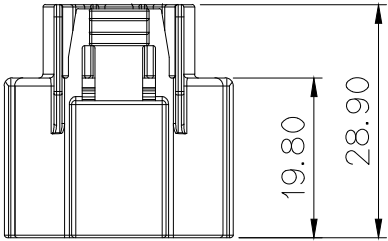

SECTION A-A

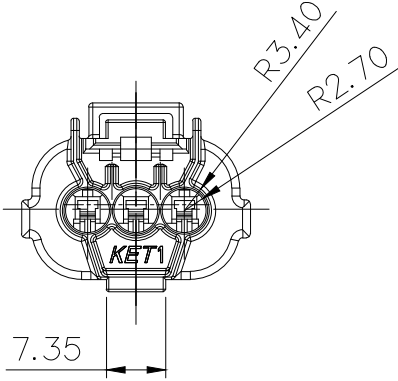

GENERAL TOLERANCE (HOUSING)							USED ON
10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT	
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	

NOTE

- MUST BE FREE OF FLASH, SINK AND IMPERFECTION THAT AFFECT FUNCTION.
- APPLICABLE TERMINAL : ST730623, 0624, 0625
WIRE SEAL : MG681114, 1115, 1116
DUMMY SEAL : MG681159
- 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD,MERCURY, CADMIUM,HEXAVALENT CHROMIUM,PBBs,PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

주 기

- 기능상 유해한 BURR 및 WELDLINE등이 없을것.
- 적용 TERMINAL :ST730623, 0624, 0625
WIRE SEAL : MG681114, 1115, 1116
DUMMY SEAL : MG681159
- 제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

APPROVED

2018-12-07

KOREA ELECTRIC
TERMINAL CO., LTD.
Product Development Team 1

ISSUE MARK

NO.	PART NO.	PART NAME	MATERIAL	FINISH
①	MG675486-5	090II WP 3F HOUSING	PBT	BLACK
②	MG675487	090II WP 3F F/HOLDER	PBT	NATURAL
③	R602414	090II WP 3P INNER SEAL	SILICONE	RED

					MATERIAL		SEE TABLE	 KOREA ELECTRIC TERMINAL CO., LTD.	
					FINISH		SEE TABLE		
					WIRE RANGE		CLASS 090II		
					INSULATION		TYPE WP		
LTR	REVISION RECORD		DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SCALE 1/1	PART NO. MG645485-5
DR.	JSY	2011.09.09	CHK.			PART NAME 090II WP 3F ASSY			
CHK.	JSY		APP. JSY						