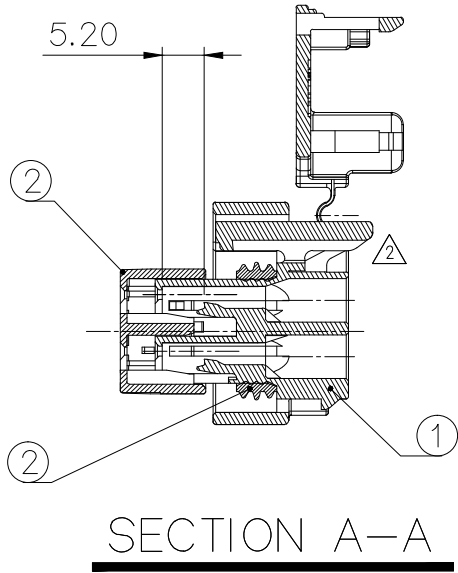

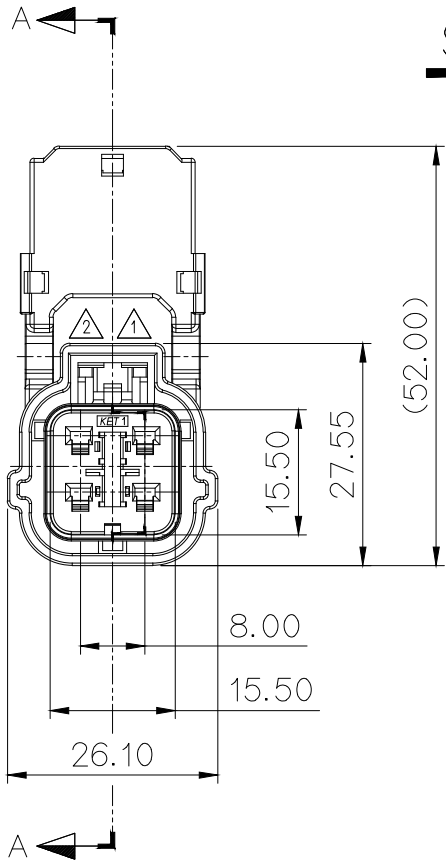
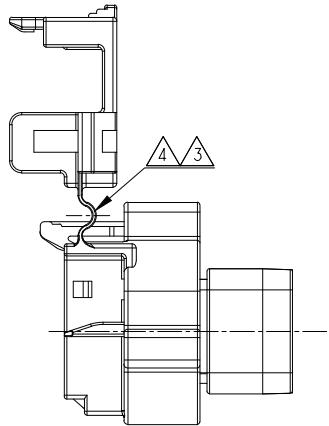
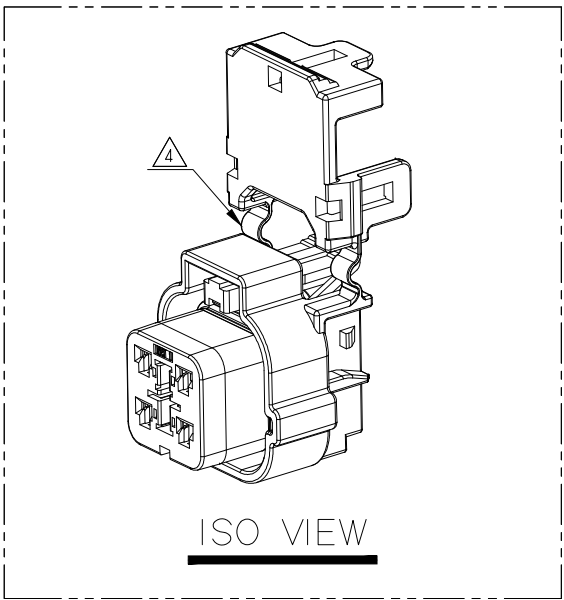


GENERAL TOLERANCE (HOUSING)										USED ON
10MAX	30MAX	50MAX	70MAX	100MAX	120MAX	250MAX	250VR	ANGLE	ECCENT	
±0.15	±0.2	±0.3	±0.4	±0.5	±0.75	±0.9	±1.4	±30'	0.1	

주 기

- 기능상 유해한 BURR 및 WELDLINE등이 없을것.
- 적용 TERMINAL : ST730623-3, ST730624-3, ST730625-3
- 제품내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가 크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

NO.	MATERIAL	COLOR
* 0	P B T: TRIBIT(1503S)	NATURAL
1		RED
2		BLUE
20		JADE
3		YELLOW
* 4		GRAY
40		DARK GRAY
41		LIGHT GRAY
5		BLACK
6		DARK GREEN
7		BROWN
8		LIGHT GREEN
9		MAGENTA
11		ORANGE

NOTE

- MUST BE FREE OF BURR, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
- APPLICABLE TERMINAL : ST730623-3, ST730624-3, ST730625-3
- 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MECURY, CADMIUM, HEXAVALENT CHROMIUM, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE.

NO.	PART NAME	PART NO.	MATERIAL	COLOR	QTY.
1	090II WP 4F HOUSING	MG675520	PBT	GRAY	1
2	090II WP 4F FRONT HOLDER	MG675521	PBT	NATURAL	1
3	090II WP 4F INNER SEAL	R602435	SILICON	RED	1

						MATERIAL SEE TABLE		 KOREA ELECTRIC TERMINAL CO., LTD.	
④	ECO-1712-368 따른 도면 재작성	KGS	NKT	CJH	'17.12.22	FINISH SEE TABLE			
③	ECO-1511-002 따른 도면 재작성 (인지부 두께 축소 및 C형상 삭제)	LJJ	CKY	LSY	'15.11.02				
②	ECO-1506-143 따른 도면 재작성 (로크 목단부 길이 증대 및 R 증대)	SY.L	CKY	LSY	'15.06.09	WIRE RANGE		CLASS 090	
①	ECO-1503-030 따른 도면 재작성 (로크부 გადა 들뜸 가이드 설치)	YTK	KMH	LSY	'15.03.03	INSULATION		TYPE WP	
LTR	REVISION RECORD		DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED SEE TABLE	SCALE 1/1	PART NO. MG645519
DR.	AJH	2014.10.02	CHK.			PART NAME 090II WP 4F ASSY			
CHK.	KMH	2014.10.02	APP. LSY			2014.10.02			

APPROVED

2018-12-07

KOREA ELECTRIC
TERMINAL CO., LTD.
Korea Electric Te
rminal Co., LTD.

ISSUE MARK