
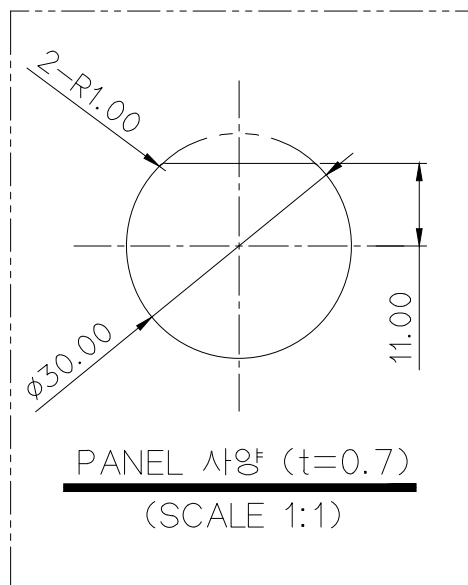
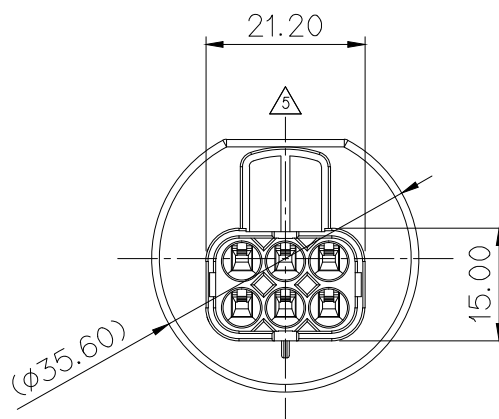
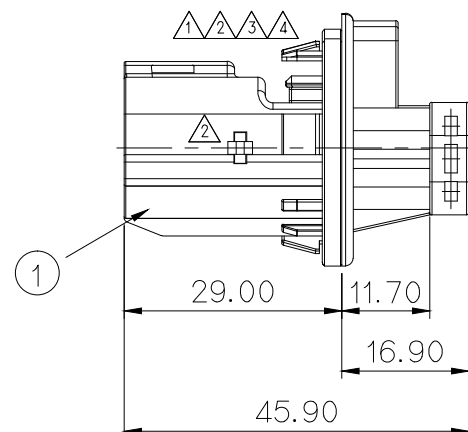
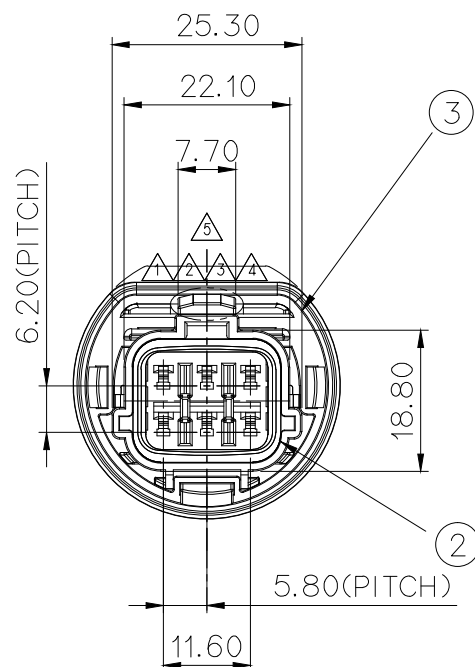
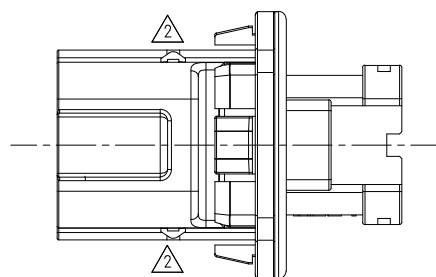


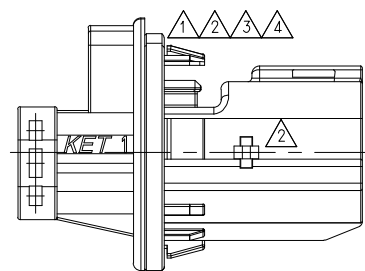

△GENERAL TOLERANCE (HOUSING)

10MAX	30MAX	50MAX	70MAX	100MAX	120MAX	250MAX	250VR	ANGLE
±0.15	±0.20	±0.30	±0.40	±0.50	±0.75	±0.90	±1.40	±30°

USED ON

주 기

- 기능상 유해한 BURR 및 WELDLINE 등이 없을 것.
- 지시하지 않은 반경 R은 0.5로 한다
- 지시하지 않은 모따기 C는 0.5으로 한다.
- 적용 TERMINAL(O60): ST741276, 741277-3, 741278-3
- 적용 상대 CONNECTOR : MG615547
- 제품내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 지정한 최대 허용 농도를 초과해서는 안된다.

NOTE

- MUST BE FREE OF BURR, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
- UNLESS OTHERWISE SPECIFIED ALL RADIUS TO BE 0.5 RADIUS.
- UNLESS OTHERWISE SPECIFIED ALL CHAMFERS TO BE 0.5 CHAMFER.
- APPLICABLE TERMINAL : ST741276, 741277-3, 741278-3
- MATCHING CONNECTOR : MG615547
- 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY, CADMIUM, HEXAVALENT CHROMIUM, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

NO.	PART NO.	PART NAME	MATERIAL	COLOR
①	MG675719-5	060 WP 6M R/LAMP HOUSING	PBT	BLACK
②	R602489	060 WP 6M R/LAMP INNER SEAL	SLICONE	RED
③	R602490	060 WP 6M R/LAMP GASKET SEAL	SLICONE	RED

△4	ECO-1312-164 근거	SYC	CSH	CWK	2013.12.16	MATERIAL	SEE TABLE	KIET ENGINEERED KOREA ELECTRIC TERMINAL CO., LTD	
△3	ECO-1311-182 근거	SYC	CSH	CWK	2013.11.25	FINISH	SEE TABLE		
△2	ECO-1303-040 근거 설계 변경	CKY			'13.03.06	WIRE RANGE			
△1	ECO-1301-157 근거 도면 변경	CKY	CSH	HSH	'13.01.22	INSULATION			
△0	ECO-1211-058 근거 도면 재작성	CKY	CSH	HSH	'12.11.14			TYPE	060 WP
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SCALE	PART NO.	
						SEE TABLE	1/1	MG645690	
24	DR.	CKY	11.10.14	CHK.	JYS	11.10.14	PART NAME		
	CHK.			APP.	KKJ	11.10.14	060 WP 6M REAR LAMP CONNECTOR		

APPROVED

2016-03-11

KOREA ELECTRIC
TERMINAL CO., LTD.
Product Development
Team 1

ISSUE MARK