



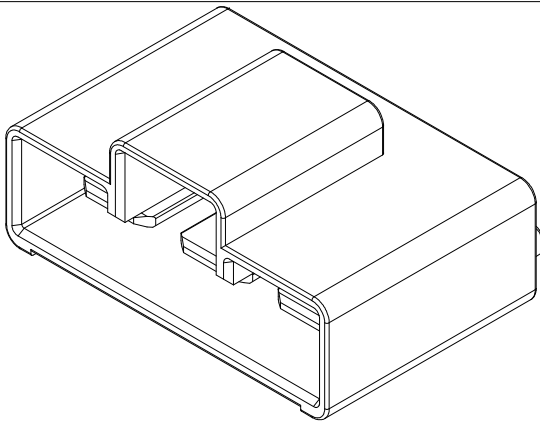

ISO VIEW

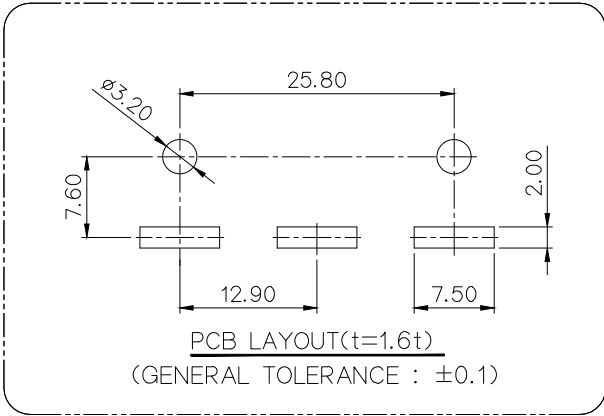

PCB LAYOUT(t=1.6t)
(GENERAL TOLERANCE : ±0.1)

GENERAL TOLERANCE (TERMINAL)					GENERAL TOLERANCE (HOUSING)							USED ON
10MAX	20MAX	45MAX	ANGLE	ECCENT	10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT	
±0.2	±0.25	±0.3	±30'	0.1	±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	

부품정보




NO	PART NAME	PART NO	MATERIAL	FINISH	Q'TY
①	375 PCB 3M PCB HOUSING	MG675732	PBT + GF30%	BLACK	1 EA
②	375 PCB M TERMINAL (S)	ST791231-3	COPPER ALLOY	PRE-TIN	1 EA

주 기

- 기능상 유해한 BURR 및 WELDLINE등이 없을 것.
- 단자 압입후 전후 방향의 미삽입이 없을것.
- 적용 FEMLAE HOUSING : MG655656
- CONNECTOR 삽발력 : 12 Kgf 이하
- 제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.


NOTE

- MUST BE FREE OF BURR, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
- AFTER THE TERMINAL IS INSERTED UNDER PRESSURE, IT MUST BE FREE FROM LOOSENESS IN HORIZONTAL DIRECTION.
- MATING FEMLAE HOUSING : MG655656
- CONNECTOR INSERTION/EXTRACTION FORCE : 12 Kgf Max.
- 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD,MERCURY, CADMIUM,HEXAVALENT CHROMIUM,PBBs,PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

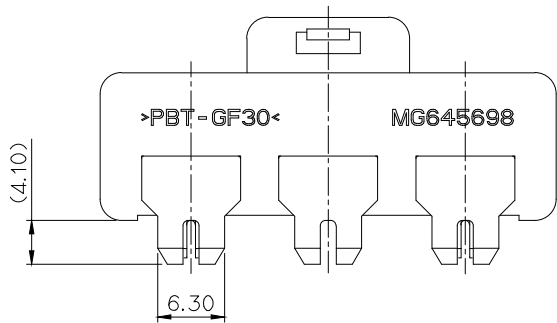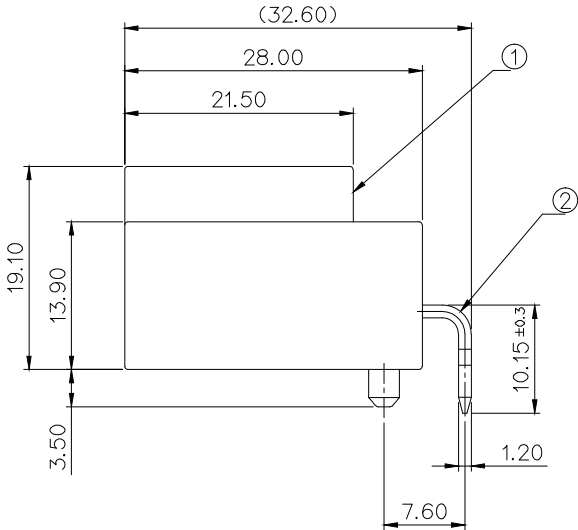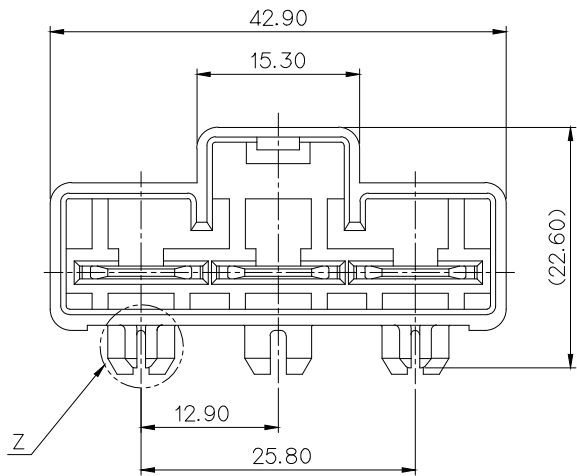


NO.	MATERIAL	COLOR
0	PBT	NATURAL
1		RED
2		BLUE
3		YELLOW
4		GRAY
40		DARK GRAY
41		LIGHT GRAY
5		BLACK
6		DARK GREEN
7		BROWN
8		LIGHT GREEN
9		MAGENTA
11		ORANGE

*



DETAIL Z
(1:5)

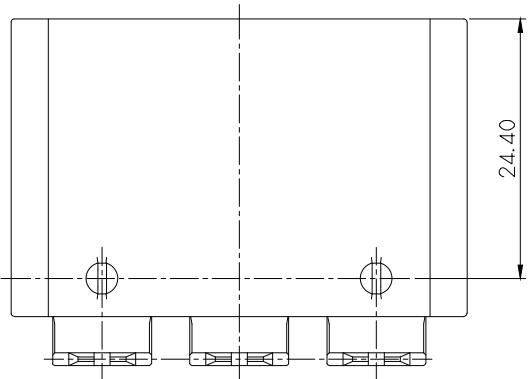

								MATERIAL	SEE TABLE	 KOREA ELECTRIC TERMINAL CO., LTD.		
								FINISH	SEE TABLE			
								WIRE RANGE			CLASS	375
								INSULATION			TYPE	
	ECO-1507-024 근거 도면 재작성 이들 및 작업성 개편에 따른 HOOK 삭제				LJY	CSH	LSY	'15.07.01				
LTR	REVISION RECORD				DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SCALE	PART NO.	
DR.	HSR 2013.09.24				CHK.					2/1	MG645698	
CHK.	CKY 2013.09.24				APP. CWK 2013.09.24				PART NAME			
375 3M PCB ASS'Y(HZT)												

APPROVED
2016-03-11

ISSUE MARK
KOREA ELECTRIC
TERMINAL CO., LTD.
Korea Electric Terminal Co., Ltd.