
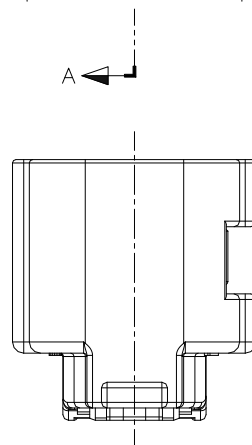
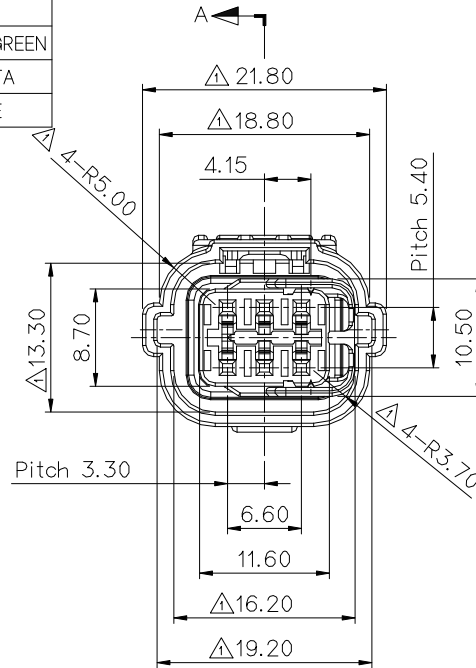
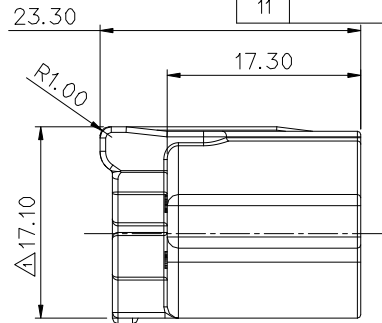


ISO VIEW

NO.	MATERIAL	COLOR
* 0	P B T	NATURAL
* 1		RED
* 2		BLUE
20		JADE
* 3		YELLOW
4		GRAY
40		DARK GRAY
41		LIGHT GRAY
* 5		BLACK
* 6		DARK GREEN
7		BROWN
8		LIGHT GREEN
9		MAGENTA
11		ORANGE





NOTE

- UNLESS OTHERWISE SPECIFIED ALL RADIUS TO BE 0.3 RADIUS.
- UNLESS OTHERWISE SPECIFIED ALL CHAMFERS TO BE 0.3 CHAMFER.
- MUST BE FREE OF FLASH, SINK AND IMPERFECTION THAT AFFECT FUNCTION.
- APPLICABLE TERMINAL : ST731363, ST731364, ST731365
APPLICABLE WIRE SEAL : MG685387, MG685388
APPLICABLE MALE ASS'Y : MG55669
- HOUSING ETCHING SPEC : KDP-6A
- 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY, CADMIUM, HEXAVALENT CHROMIUM, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE.

GENERAL TOLERANCE (HOUSING)							USED ON
10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT	
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	

NO.	PART NO.	PART NAME	MATERIAL	FINISH
1	MG675771-5	025 WP 6F HOUSING	△ SEE TABLE	△ SEE TABLE
2	MG675772	025 WP 6F SIDE HOLDER	PBT	NATURAL
3	R602512	025 WP 6F INNER SEAL	SILICONE	RED

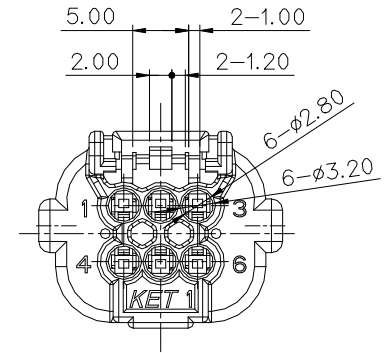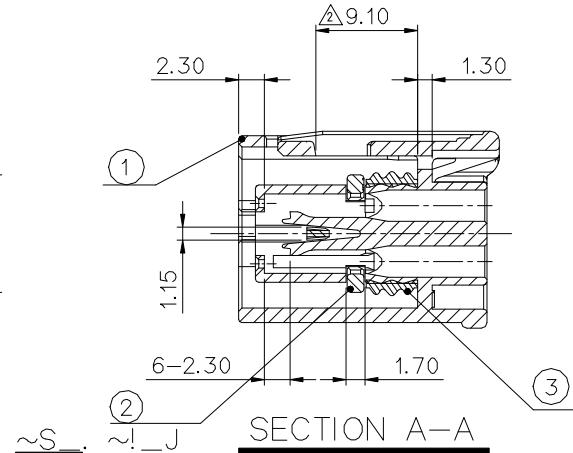

- 지시하지 않은 반경 R은 0.3으로 한다.
- 지시하지 않은 모따기 C는 0.3으로 한다.
- ~!_J^!3|P^*!|5 ~R_2~F_~^"3'K|\$ BURR ^"5|7 WELDLIN^J'3|P~,_5 ^,%|2^R'3|C^!%|3.
- 적용 TERMINAL : ST731363, 1364
WIRE SEAL : MG685387, 5388
MALE ASS'Y : MG655669
- HOUSING 표면 부식 사양 : KDP-6A
- 제품내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가 크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

ISSUE MARK

						MATERIAL	SEE TABLE	 KOREA ELECTRIC TERMINAL CO., LTD.
						FINISH	SEE TABLE	
	ECO-1307-141 근거 도면 제작성 (고객요청 신규 COLOR 추가-BLUE 외 4종)	KYJ	HEM	CWK	13.07.16	WIRE RANGE		CLASS 025 WP
	ECO-1302-011 근거 도면 제작성 (기본성능 개선)	KYJ	HEM	SHS	13.02.04			
	ECO-1209-102 근거 도면 제작성 (HSG 앞 보강)	KYJ	HEM	SHS	12.10.19	INSULATION		TYPE
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SCALE 2/1	PART NO. MG645722
DR.	KYJ 2012.04.12	CHK.	HSJ 2012.04.12	PART NAME				
CHK.	CWK 2012.04.12	APP.	SHS 2012.04.12	025 WP 6F ASSY				