

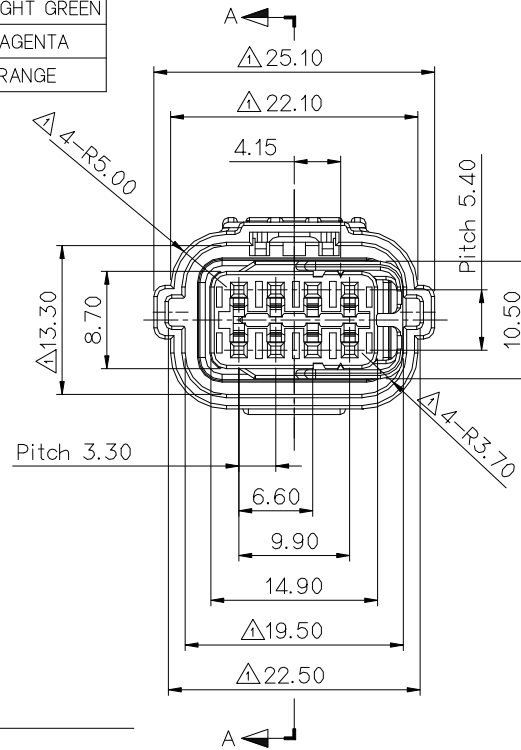
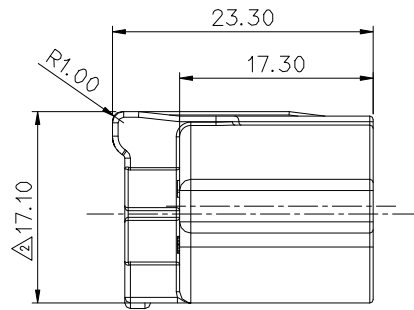



ISO VIEW

NO.	MATERIAL	COLOR
* 0	P B T	NATURAL
* 1		RED
* 2		BLUE
20		JADE
* 3		YELLOW
4		GRAY
40		DARK GRAY
41		LIGHT GRAY
* 5		BLACK
* 6		DARK GREEN
7		BROWN
8		LIGHT GREEN
9		MAGENTA
11		ORANGE

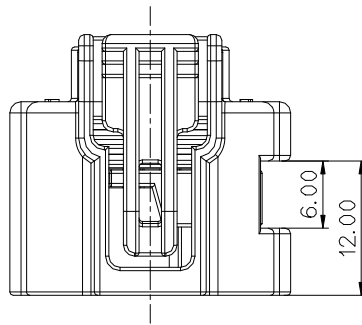

GENERAL TOLERANCE (HOUSING)							USED ON
10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT	
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	

NO.	PART NO.	PART NAME	MATERIAL	FINISH
1	MG675775-5	025 WP 8F HOUSING	△ SEE TABLE	△ SEE TABLE
2	MG675776	025 WP 8F SIDE HOLDER	PBT	NATURAL
3	R602513	025 WP 8F INNER SEAL	SILICONE	RED

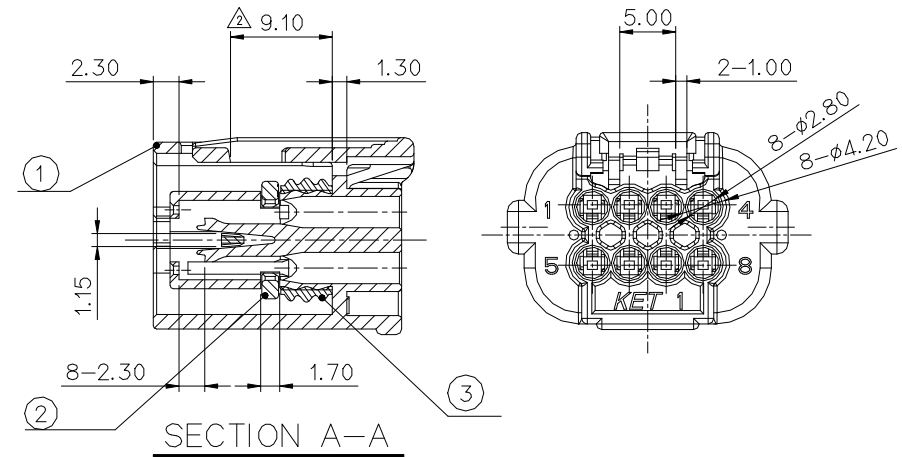

~S. ~!_J

1. 지시하지 않은 반경 R은 0.3으로 한다.
2. 지시하지 않은 모따기 C는 0.3으로 한다.
3. 적용 TERMINAL : ST731363, 1364
WIRE SEAL : MG685387, 5388
MALE ASS'Y : MG655670
4. 제품내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가 크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

NOTE

1. UNLESS OTHERWISE SPECIFIED ALL RADIUS TO BE 0.3 RADIUS.
2. UNLESS OTHERWISE SPECIFIED ALL CHAMFERS TO BE 0.3 CHAMFER.
3. APPLICABLE TERMINAL : ST731363, 1364
APPLICABLE WIRE SEAL : MG685387, 5388
APPLICABLE MALE ASS'Y : MG655670
4. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY, CADMIUM, HEXAVALENT CHROMIUM, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE.

ISSUE MARK

KET KOREA ELECTRIC
ENGINEERED TERMINAL CO., LTD.

							MATERIAL	SEE TABLE	 KOREA ELECTRIC TERMINAL CO., LTD.		
							FINISH	SEE TABLE			
	ECO-1307-141 근거 도면 재작성 (고객요청 신규 COLOR 추가-BLUE 외 4종)	KYJ	HEM	CWK	13.07.16		WIRE RANGE		CLASS 025 WP		
	ECO-1302-011 근거 도면 재작성 (기본성능 개선-재검출)	KJS	HEM	HSJ	13.02.04						
	ECO-1210-153 근거 도면 재작성 (HSG 볼 보강)	KJS	HEM	HSJ	12.10.23		INSULATION		TYPE		
LTR	REVISION RECORD		DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SEE TABLE	SCALE 2/1	PART NO.	MG645723
DR.	KYJ	2012.04.12	CHK.	HYJ		2012.04.12	PART NAME				
CHK.	CWK	2012.04.12	APP.	HSJ		2012.04.12	025 WP 8F ASSY				