
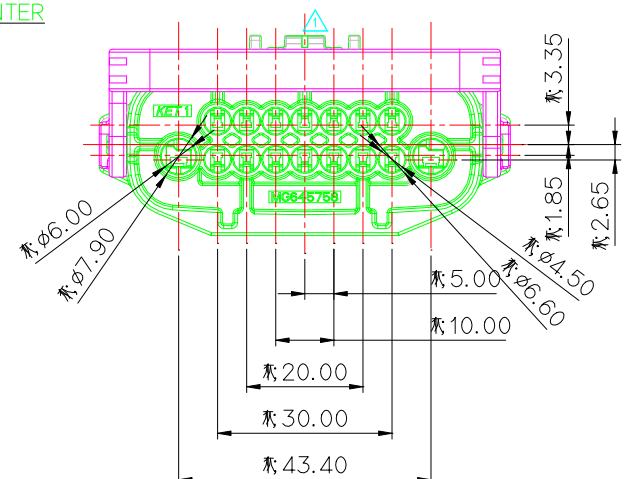


GENERAL TOLERANCE (HOUSING)										USED ON
10MAX	30MAX	50MAX	70MAX	100MAX	120MAX	250MAX	250VR	ANGLE	ECCENT	
±0.15	±0.20	±0.30	±0.40	±0.50	±0.75	±0.90	±1.4	±30'	0.1	

NOTE

- MUST BE FREE OF BURR, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
- APPLICABLE TERMINAL(060) : ST731367, 1368, 1369
 APPLICABLE TERMINAL(110) : ST731152, 1153
 WIRE SEAL(060) : MG685389, 5390, 5391, 5392, 5393
 WIRE SEAL(110) : MG680470, 0564
 DUMMY SEAL : (060)MG685394 / (110)MG680905
 MALE ASSY : MG655704
- 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY, CADMIUM, HEXAVALENT CHROMIUM, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

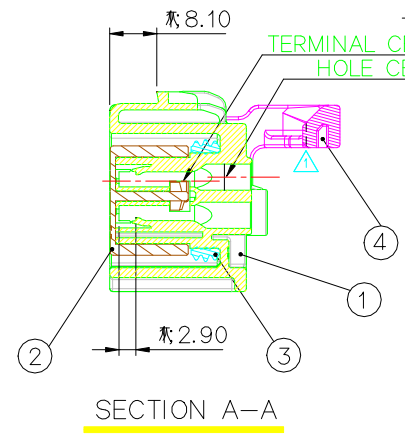

주 기

- 기능상 유해한 BURR 및 WELDLINE 등이 없을 것.
- 적용 TERMINAL(060) : ST731367, 1368, 1369
 적용 TERMINAL(110) : ST731152, 1153
 WIRE SEAL(060) : MG685389, 5390, 5391, 5392, 5393
 WIRE SEAL(110) : MG680470, 0564
 DUMMY SEAL : (060)MG685394 / (110)MG680905
 MALE ASSY : MG655704
- 제품내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안 된다.



ISSUE MARK

NO.	PART NO.	PART NAME	MATERIAL	FINISH
①	MG675892-5	060110 WP 16F HSOSING	PBT	BLACK
②	MG675893	060110 WP 16F F/HOLDER	PBT+GF10%	NATURAL
③	R602568	060110 WP 16F I/SEAL	SILICONE	RED
④	MG675894-5	060110 WP 16F LEVER	POM	BLACK

							MATERIAL	SEE TABLE	KJET KOREA ELECTRIC	
							FINISH	SEE TABLE	ENGINEERED TERMINAL CO., LTD.	
							WIRE RANGE		CLASS	060110
							INSULATION		TYPE	WP
LTR	REVISION	RECORD	DR.	CHK.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SCALE	PART NO.
								SEE TABLE	1/1	MG645758
DR.	JSY	2011.11.22	CHK.					PART NAME	060110 WP 16F ASSY	
CHK.			APP.	HSH		2011.11.22				