

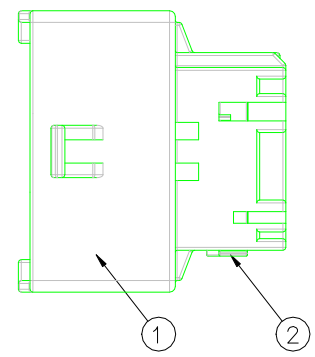

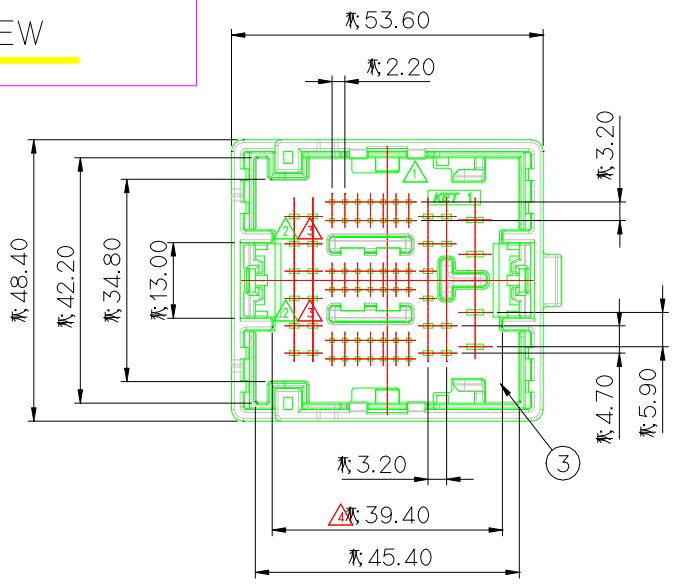


ISO VIEW

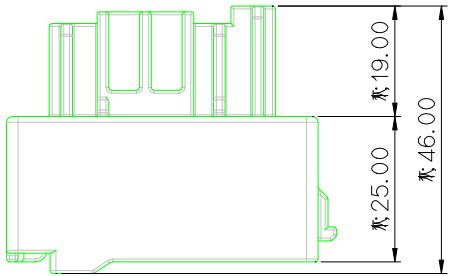

GENERAL TOLERANCE (HOUSING)

10MAX	30MAX	50MAX	70MAX	100MAX	120MAX	250MAX	250VR	ANGLE	ECCENT	USED ON
±0.15	±0.2	±0.3	±0.4	±0.5	±0.75	±0.9	±1.4	±30'	0.1	

NOTE

- MUST BE FREE OF FLASH, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
- APPLICABLE TERMINAL(025) : ST741345, 1346-3
 APPLICABLE TERMINAL(060) : ST741331, 1332, 1333-3
 APPLICABLE TERMINAL(110) : ST741285, 1286, 1287-3
 APPLICABLE CONNECTOR : MG655730
- 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY, CADMIUM, HEXAVALENT CHROMIUM, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

주 기

- 기능상 유해한 BURR 및 WELDLINE 등이 없을 것.
- 적용 TERMINAL(025) : ST741345, 1346-3
 적용 TERMINAL(060) : ST741331, 1332, 1333-3
 적용 TERMINAL(110) : ST741285, 1286, 1287-3
 적용 CONNECTOR : MG655730
- 제품내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

APPROVED

2015-06-25

KOREA ELECTRIC
 TERMINAL CO., LTD.
 Connector Development Team 1

ISSUE MARK

NO.	PART NAME	PART NO.	MATERIAL	COLOR	QTY.
1	025060110 68M HOUSING	MG675975	PBT	NATURAL	1
2	025060110 68M SPACER	MG675976	PBT	L/GRAY	1
3	025060110 68M PLATE	MG675977	POM	BLACK	1

△	ECO-1502-434 근거 도면 제작성	JHK	WDH	KMH	LSY	'15.02.26	MATERIAL	SEE TABLE	KOREA ELECTRIC TERMINAL CO., LTD.
△	ECO-1502-314 근거 도면 제작성	SYL	WDH	KMH	LSY	'15.02.13	FINISH	SEE TABLE	
△	ECO-1502-083 근거 도면 제작성	SYL	WDH	KMH	LSY	'15.02.04	WIRE RANGE	CLASS	
△	ECO-1412-271 근거 도면 제작성	WDH	-	KMH	LSY	'14.12.22	INSULATION	TYPE 025/060/110	
△	검사 성적서 합격에 따른 도면 제작성	LJW	WDH	KMH	LSY	'14.07.01	PART NO.	MG645775	
LTR	REVISION RECORD	DR.	CHK.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SCALE 2/1	
DR.	KMH	2013.05.28	CHK.				PART NAME		
CHK.	CWK	2013.05.28	APP.	HSH	2013.05.28		025060110 68M ASSY		