



GENERAL TOLERANCE (TERMINAL)					GENERAL TOLERANCE (HOUSING)							USED ON
10MAX	20MAX	45MAX	ANGLE	ECCENT	10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT	
±0.2	±0.25	±0.3	±30'	0.1	±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	

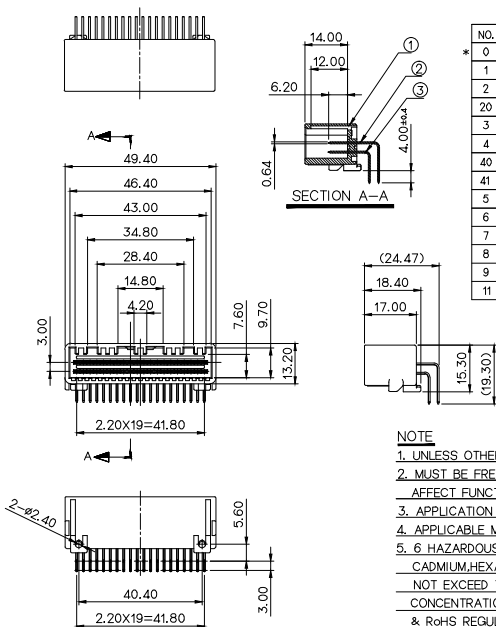

NO.	MATERIAL	COLOR
0	PBT-QF30	NATURAL
1		RED
2		BLUE
20		JADE
3		YELLOW
4		GRAY
40		DARK GRAY
41		LIGHT GRAY
5		BLACK
6		DARK GREEN
7		BROWN
8		LIGHT GREEN
9		MAGENTA
11		ORANGE

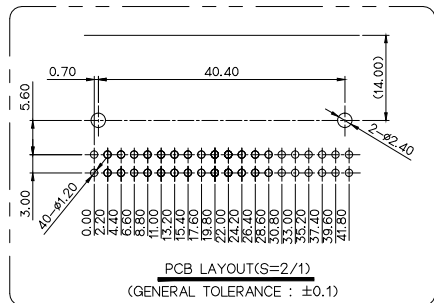

주 기

1. 지시하지 않은 반경 R은 0.3로 한다
2. 기능상 유해한 BURR 및 변형이 없을것.
3. 적용 FEMALE HOUSING : MG655708
4. 적용 BOLT : M3 일반나사
5. 제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

NOTE

1. UNLESS OTHERWISE SPECIFIED ALL R TO BE 0.3 RADIUS.
2. MUST BE FREE OF BURR AND IMPERFECTION THAT AFFECT FUNCTION.
3. APPLICATION FEMALE HOUSING : MG655708
4. APPLICABLE MOUNTING SCREW : M3 SCREW
5. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD,MERCURY, CADMIUM,HEXAVALENT CHROMIUM,PBBs,PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

APPROVED

2018-12-07

KOREA ELECTRIC
TERMINAL CO., LTD.
Connector Develop
ment Team 3

ISSUE MARK

NO.	PART NAME	PART NO.	MATERIAL	FINISH	QTY.
①	025 40M PCB HS'G (H2T)	MG676123	SEE TABLE	SEE TABLE	1
②	025 PCB MALE TM'L (L)	ST791224-2S	BRASS	Sn 후도금	20
③	025 PCB MALE TM'L (S)	ST791225-2S	BRASS	Sn 후도금	20

REVISION RECORD				MATERIAL		FINISH		WIRE RANGE		INSULATION		SCALE		PART NO.	
DR	CHK	APP.	DATE	DR	CHK	APP.	DATE	DR	CHK	APP.	DATE	DR	CHK	APP.	DATE
JDR			'13.11.11	CHK			'13.11.12					1/1			
CHK	WSW		'13.11.13	APP	CKW		'13.11.13								

KOREA ELECTRIC
TERMINAL CO., LTD.

CLASS

TYPE

PART NO. MG645820

025 40M PCB ASSY(H2T)