


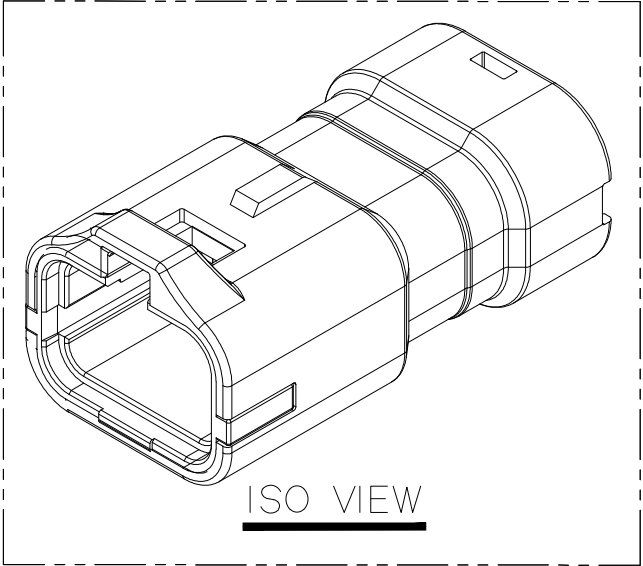

NO.	MATERIAL	COLOR
0	P B T:	NATURAL
1		RED
2		BLUE
20		JADE
3		YELLOW
4		GRAY
40		DARK GRAY
* 41		LIGHT GRAY
* 5		BLACK
6		DARK GREEN
7		BROWN
8		LIGHT GREEN
9		MAGENTA
11		ORANGE

NOTE




1. MUST BE FREE OF BURR, WELDLINE
AND IMPERFECTION THAT AFFECT FUNCTION.
2. APPLICABLE TERMINAL : ST741138
APPLICABLE R/HOLDER : MG635691
APPLICABLE REAR SEAL
:MG685449(8P) (AEXF 0.3-0.5)
:MG685470 (AVSS 0.3-0.5, FLRY-A 0.35-0.5)
3. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD,
MERCURY, CADMIUM,HEXAVALENT CHROMIUM,
PBBs,PBDEs) SHALL NOT EXCEED THE MAXIMUM
PERMISSIBLE CONCENTRATION PRESCRIBED
UNDER EU ELV DIRECTIVE

주 기

1. 기능상 유해한 BURR 및 WELDLINE 등이 없을 것.
2. 적용 TERMINAL : ST741138
적용 R/HOLDER : MG635691
적용 REAR SEAL (8P)
:MG685449 (AEXF 0.3-0.5)
:MG685470 (AVSS 0.3-0.5, FLRY-A 0.35-0.5)
3. 제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬,
PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서
지정한 최대 허용 농도를 초과해서는 안된다.

GENERAL TOLERANCE (HOUSING)										USED ON
10MAX	30MAX	50MAX	70MAX	100MAX	120MAX	250MAX	250VR	ANGLE	ECCENT	
±0.15	±0.2	±0.3	±0.4	±0.5	±0.75	±0.9	±1.4	±30'	0.1	

NO.	PART NO.	PART NAME	DIE NO.	MATERIAL	COLOR
①	MG676142	SP WP 8M HOUSING	23867	PBT	SEE TABLE
②	MG676146	SP WP 8M F/HOLDER	23870	PBT	NATURAL
③	R603080	SP WP 8M I/SEAL	2B134	SILICONE	RED

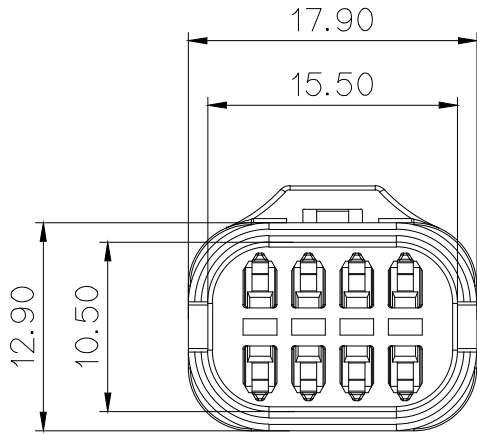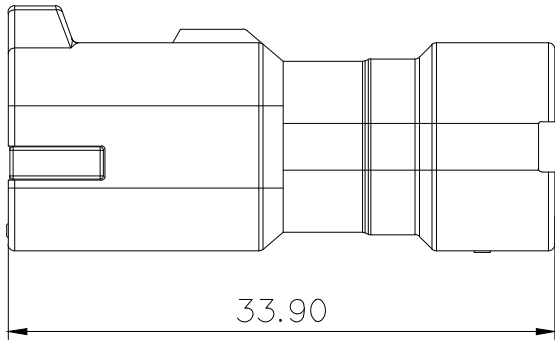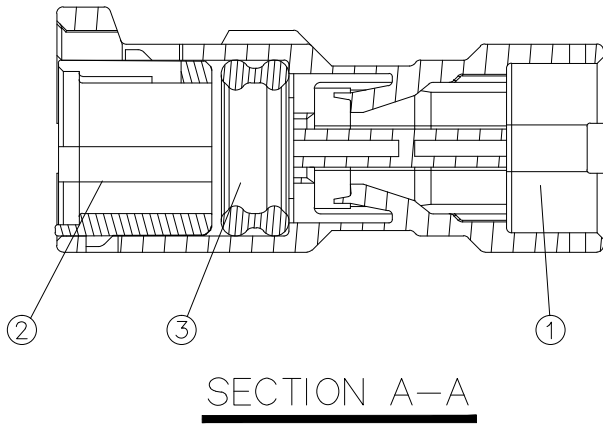

						MATERIAL	SEE TABLE	KETENGINEERED KOREA ELECTRIC TERMINAL CO., LTD. Korea Electric Te rminal Co., LTD.	
						FINISH	SEE TABLE		
⚠	ECO-1512-075큰거 도면 제작성	YDH	HYJ	SUK	2015.12.04	WIRE RANGE	0.3 ~ 0.5	CLASS	SP
⚠	검사 성적서 합격에 따른 도면 제작성	JCM	KMH	LSY	2015.05.22	INSULATION		TYPE	
LTR	REVISION RECORD	DR.	CHK.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SCALE 2/1	PART NO. MG645825
DR.	WDH. 2014.02.17	CHK.							
CHK.	KMH. 2014.02.17	APP.	CWK. 2014.02.17			PART NAME SP WP 8M ASSY			

APPROVED

2016-03-07

KOREA ELECTRIC
TERMINAL CO., LTD.
Korea Electric Te
rminal Co., LTD.

ISSUE MARK