

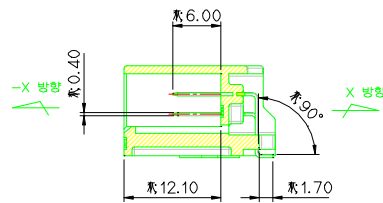
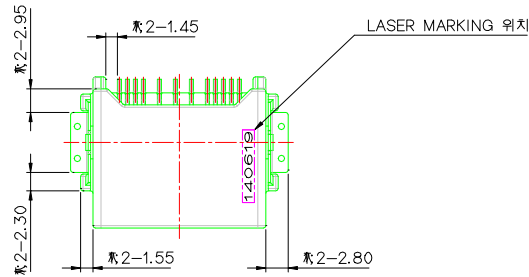






GENERAL TOLERANCE (TERMINAL)					GENERAL TOLERANCE (HOUSING)					USED ON		
10MAX	20MAX	45MAX	ANGLE	ECCENT	10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT	
±0.2	±0.25	±0.3	±30'	0.1	±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	

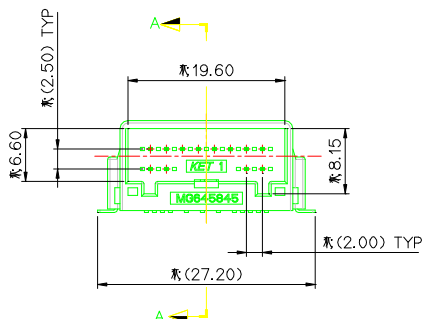

SECTION A-A

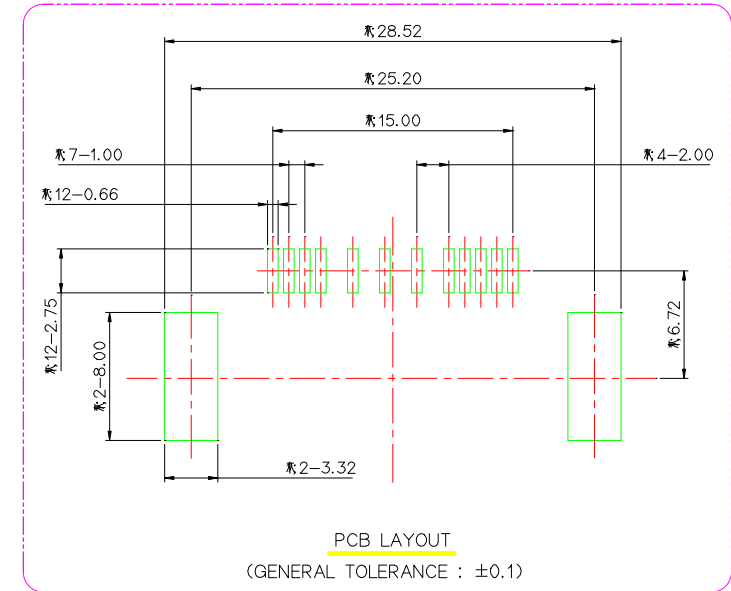

020 12M PCB ASSY A (SMD) MG645845 (NATURAL)	020 12M PCB ASSY B (SMD) MG645866-5 (BLACK)	020 12M PCB ASSY C (SMD) MG645867-2 (BLUE)



NO.	PART NAME	PART NO.	MATERIAL	FINISH	QTY.
	020 12M PCB HS'G A (SMD)	MG676206		NATURAL	1
①	020 12M PCB HS'G B (SMD)	MG676261-5	LCP-GF30	BLACK	1
	020 12M PCB HS'G C (SMD)	MG676262-2		BLUE	1
②	020 SMD MALE TM'L (L)	ST792584-2	BRASS	Sn	8
③	020 SMD MALE TM'L (S)	ST792585-2	BRASS	Sn	8
④	020 SIDE BRACKET	ST792586-2	BRASS	Sn	8

NOTE

- UNLESS OTHERWISE SPECIFIED ALL R TO BE 0.3 RADIUS.
- MUST BE FREE OF BURR AND IMPERFECTION THAT AFFECT FUNCTION.
- APPLICATION FEMALE HOUSING : A Type - MG655794 / B Type - MG655814 / C Type - MG655815
- 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY, CADMIUM, HEXA VALENT CHROMIUM, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

주 기

- 지시하지 않은 반경 R은 0.3로 한다
- 기능상 유해한 BURR 및 변형이 없을것.
- 적용 FEMALE HOUSING : A Type-MG655794 / B Type-MG655814 / C Type-MG655815
- 제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

LTR	REVISION RECORD	DR	CHK	APP.	DATE	MATERIAL	SEE TABLE	FINISH	SEE TABLE	WIRE RANGE	CLASS	INSULATION	TYPE	SCALE	PART NO.
													020	2/1	MG645845, 866, 867
DR.	SYC '14.07.08	CHK.	JBS		'14.07.10	TOLERANCE	SEE TABLE								
CHK.		APP.	BIN		'14.07.10	PART NAME	020 12M PCB ASSY A, B, C (SMD)								

