




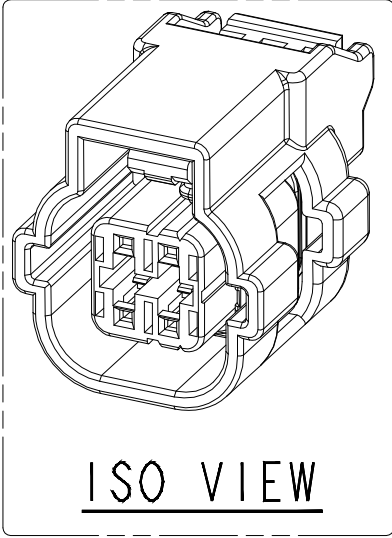





NO.	MATERIAL	COLOR
0	P B T	NATURAL
1		RED
* 2		BLUE
20		JADE
3		YELLOW
4		GRAY
40		DARK GRAY
41		LIGHT GRAY
* 5		BLACK
6		DARK GREEN
7		BROWN
8		LIGHT GREEN
9		MAGENTA
11		ORANGE

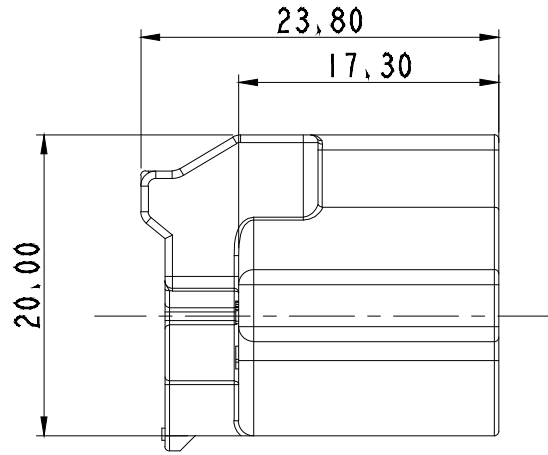

GENERAL TOLERANCE (HOUSING)											USED ON
10 MAX	30 MAX	50 MAX	70 MAX	100 MAX	120 MAX	250 MAX	250 VR	ANGLE	ECCENT		
±0.15	±0.2	±0.3	±0.4	±0.5	±0.75	±0.9	±1.4	±30'	0.1		

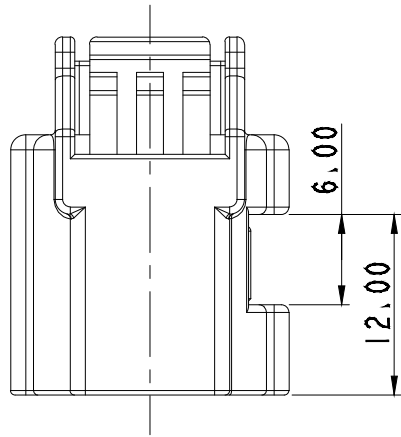

NO.	PART NO.	PART NAME	MATERIAL	FINISH
1	MG676266	025 WP 4F HOUSING	PBT	SEE TABLE
2	MG676267	025 WP 4F SIDE HOLDER	PBT	NATURAL
3	R603203	025 WP 4F INNER SEAL	SILICONE	RED

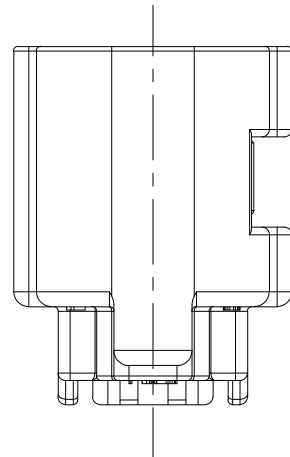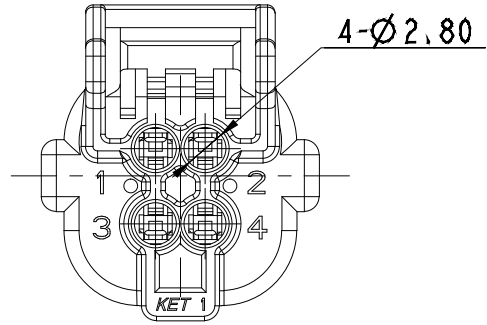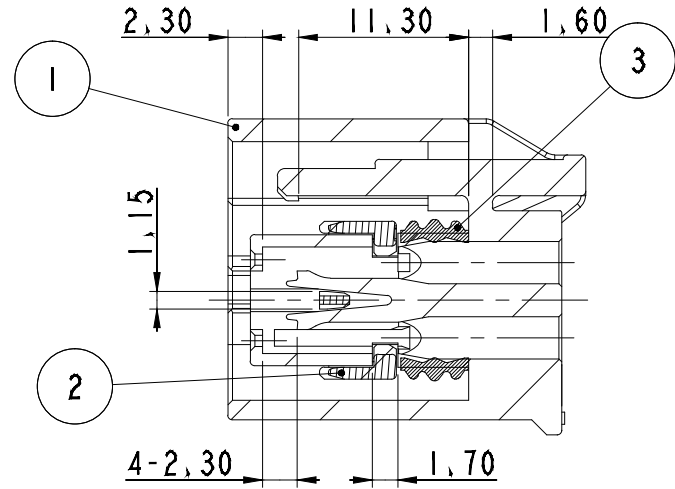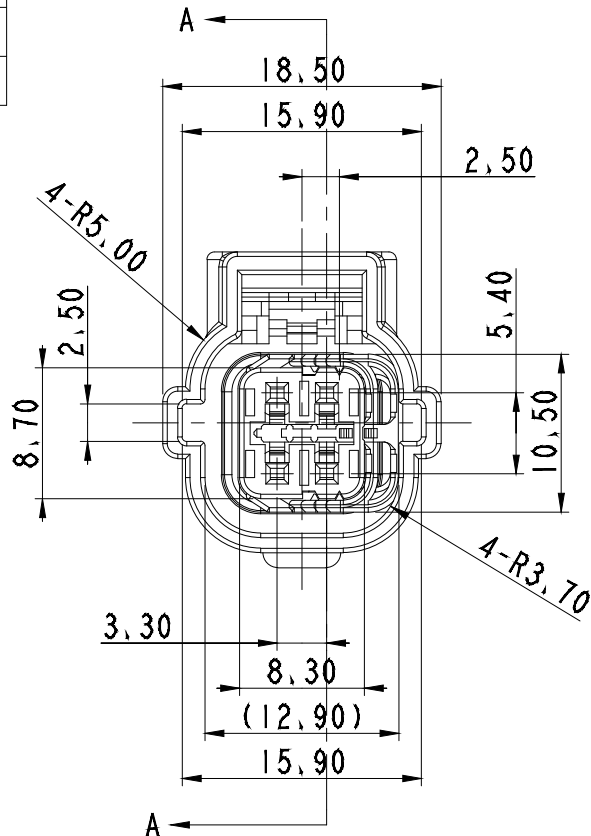

NOTE

- UNLESS OTHERWISE SPECIFIED ALL RADIUS TO BE 0.3 RADIUS.
- UNLESS OTHERWISE SPECIFIED ALL CHAMFERS TO BE 0.3 CHAMFER.
- MUST BE FREE OF FLASH, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
- APPLICABLE TERMINAL : ST731363, 1364
WIRE SEAL : MG685387, 5388
MALE ASS'Y : MG655806
- HOUSING ETCHING SPEC : KDP-6A
- 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY, CADMIUM, HEXAVALENT CHROMIUM, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

주 기

- 지시하지 않은 반경 R은 0.3로 한다.
- 지시하지 않은 모따기 C는 0.3으로 한다.
- 기능상 유해한 BURR 및 WELDLINE 등이 없을 것.
- 적용 TERMINAL : ST731363, 1364
WIRE SEAL : MG685387, 5388
MALE ASS'Y : MG655806
- HOUSING 표면 부식 사양: KDP-6A
- 제품내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

APPROVED

2016-03-07

KOREA ELECTRIC
TERMINAL CO., LTD.
Korea Electric Te
rminal Co., LTD.

ISSUE MARK

						MATERIAL		SEE TABLE	 KOREA ELECTRIC TERMINAL CO., LTD.				
						FINISH		SEE TABLE					
						WIRE RANGE		CLASS		025 WP			
						INSULATION		TYPE					
	검사성적서 합격에 따른 도면 제작상				JCM	SSH	SUK	15.07.28					
LTR	REVISION RECORD				DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SEE TABLE	SCALE 2/1	PART NO.	MG645854
DR.		WDH		2014.06.18		CHK.							
CHK.		KMH		2014.06.18		APP.			LSY		2014.06.18		
PART_NAME										025 WP 4F ASSY			