



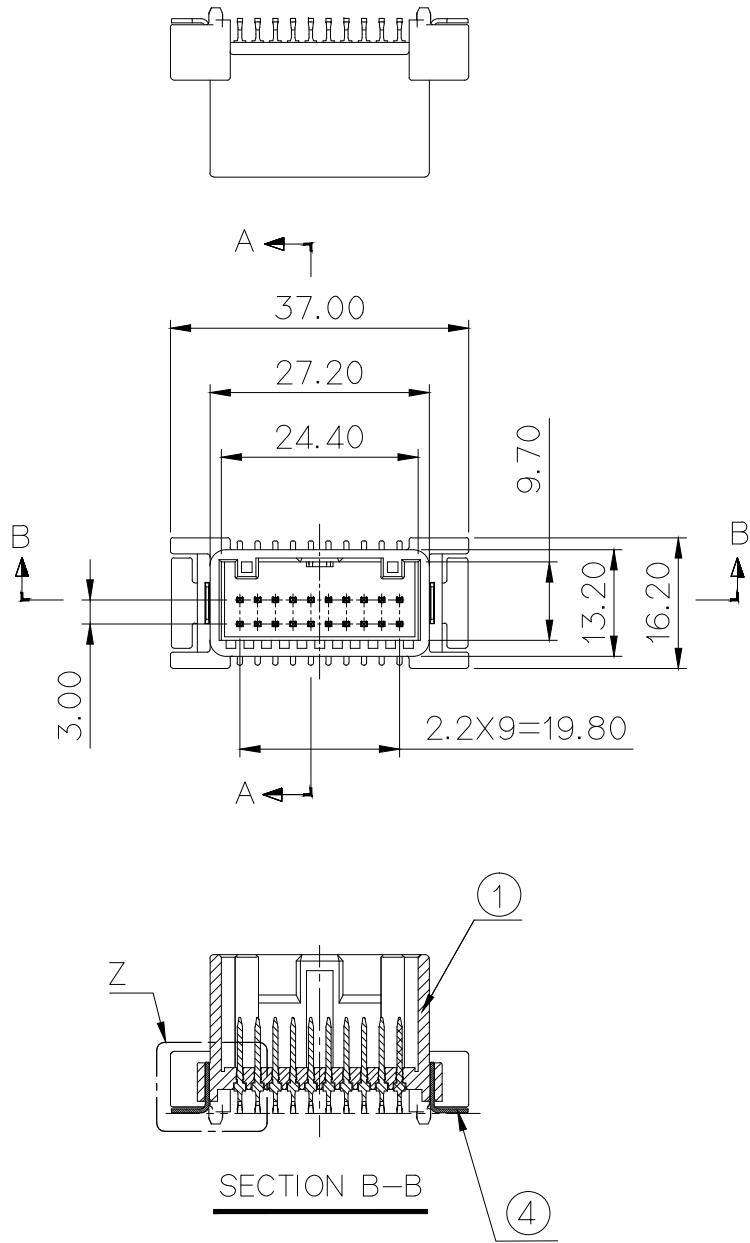

GENERAL TOLERANCE (TERMINAL)						GENERAL TOLERANCE (HOUSING)							USED ON
10 MAX	20 MAX	45 MAX	45 VR	ANGLE	ECCENT	10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT	
±0.2	±0.25	±0.3	±0.5	±30'	0.1	±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	

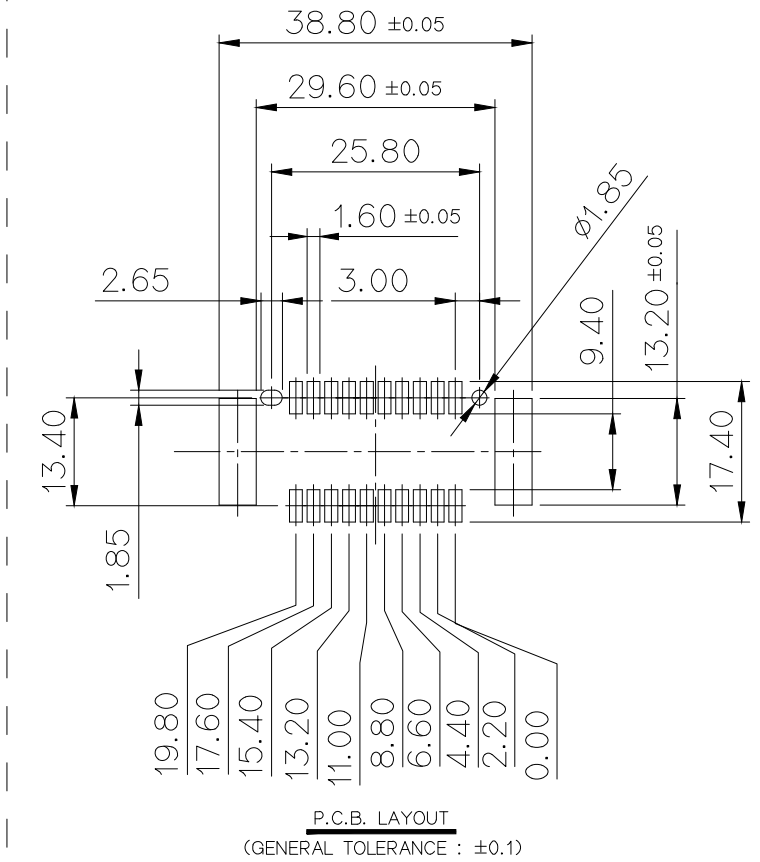

포장 사양

ASSY NO.	포장사양
MG645886-5	PS TRAY+종이 BOX
MG645886-5T	TUBE+종이 BOX

주 기

- 기능상 유해한 FLASH, SINK, 미성형 등이 없을 것.
- 적용 FEMALE HS'G : MG655830
- 단자 주석 도금 - TYPE A Sn(무광택), (MS915-01)
Ni 하지 도금 + Sn(무광) + REFLOW
- 제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬,PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

NOTE

- MUST BE FREE OF FLASH, SINK AND IMPERFECTION THAT AFFECT FUNCTION.
- APPLICABLE FEMALE HS'G : MG655830
- TIN-PLATED TERMINAL - TYPE A Sn(MATTE), (MS915-01)
Ni-PLATED UNDER + Sn(MATTE) + REFLOW
- 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD,MERCURY, CADMIUM, HEXAVALENT CHROMIUM,PBBs,PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

NO.	PART NAME	PART NO.	MATERIAL	FINISH	QTY.
①	025 20M SMD HS'G	MG676334	PPS+GF40%	SEE TABLE	1
②	025 SMD MALE TM'L (L)	ST792608-2	BRASS	Sn 후도금(무광)-Reflow	10
③	025 SMD MALE TM'L (S)	ST792609-2	BRASS	Sn 후도금(무광)-Reflow	10
④	025 SMD BRACKET	ST792240-2	BRASS	Sn 후도금	2

					MATERIAL		SEE TABLE	 KOREA ELECTRIC TERMINAL CO., LTD.		
					FINISH		SEE TABLE			
					WIRE RANGE		CLASS		025	
					INSULATION		TYPE		SMD	
LTR	REVISION RECORD		DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SCALE	PART NO.	MG645886
DR. KSY '14.12.30			CHK. YSW '14.12.31			SEE TABLE	1/1			
CHK.			APP. BIN '14.12.31					PART NAME		
										025 20M SMD ASSY



ISSUE MARK