


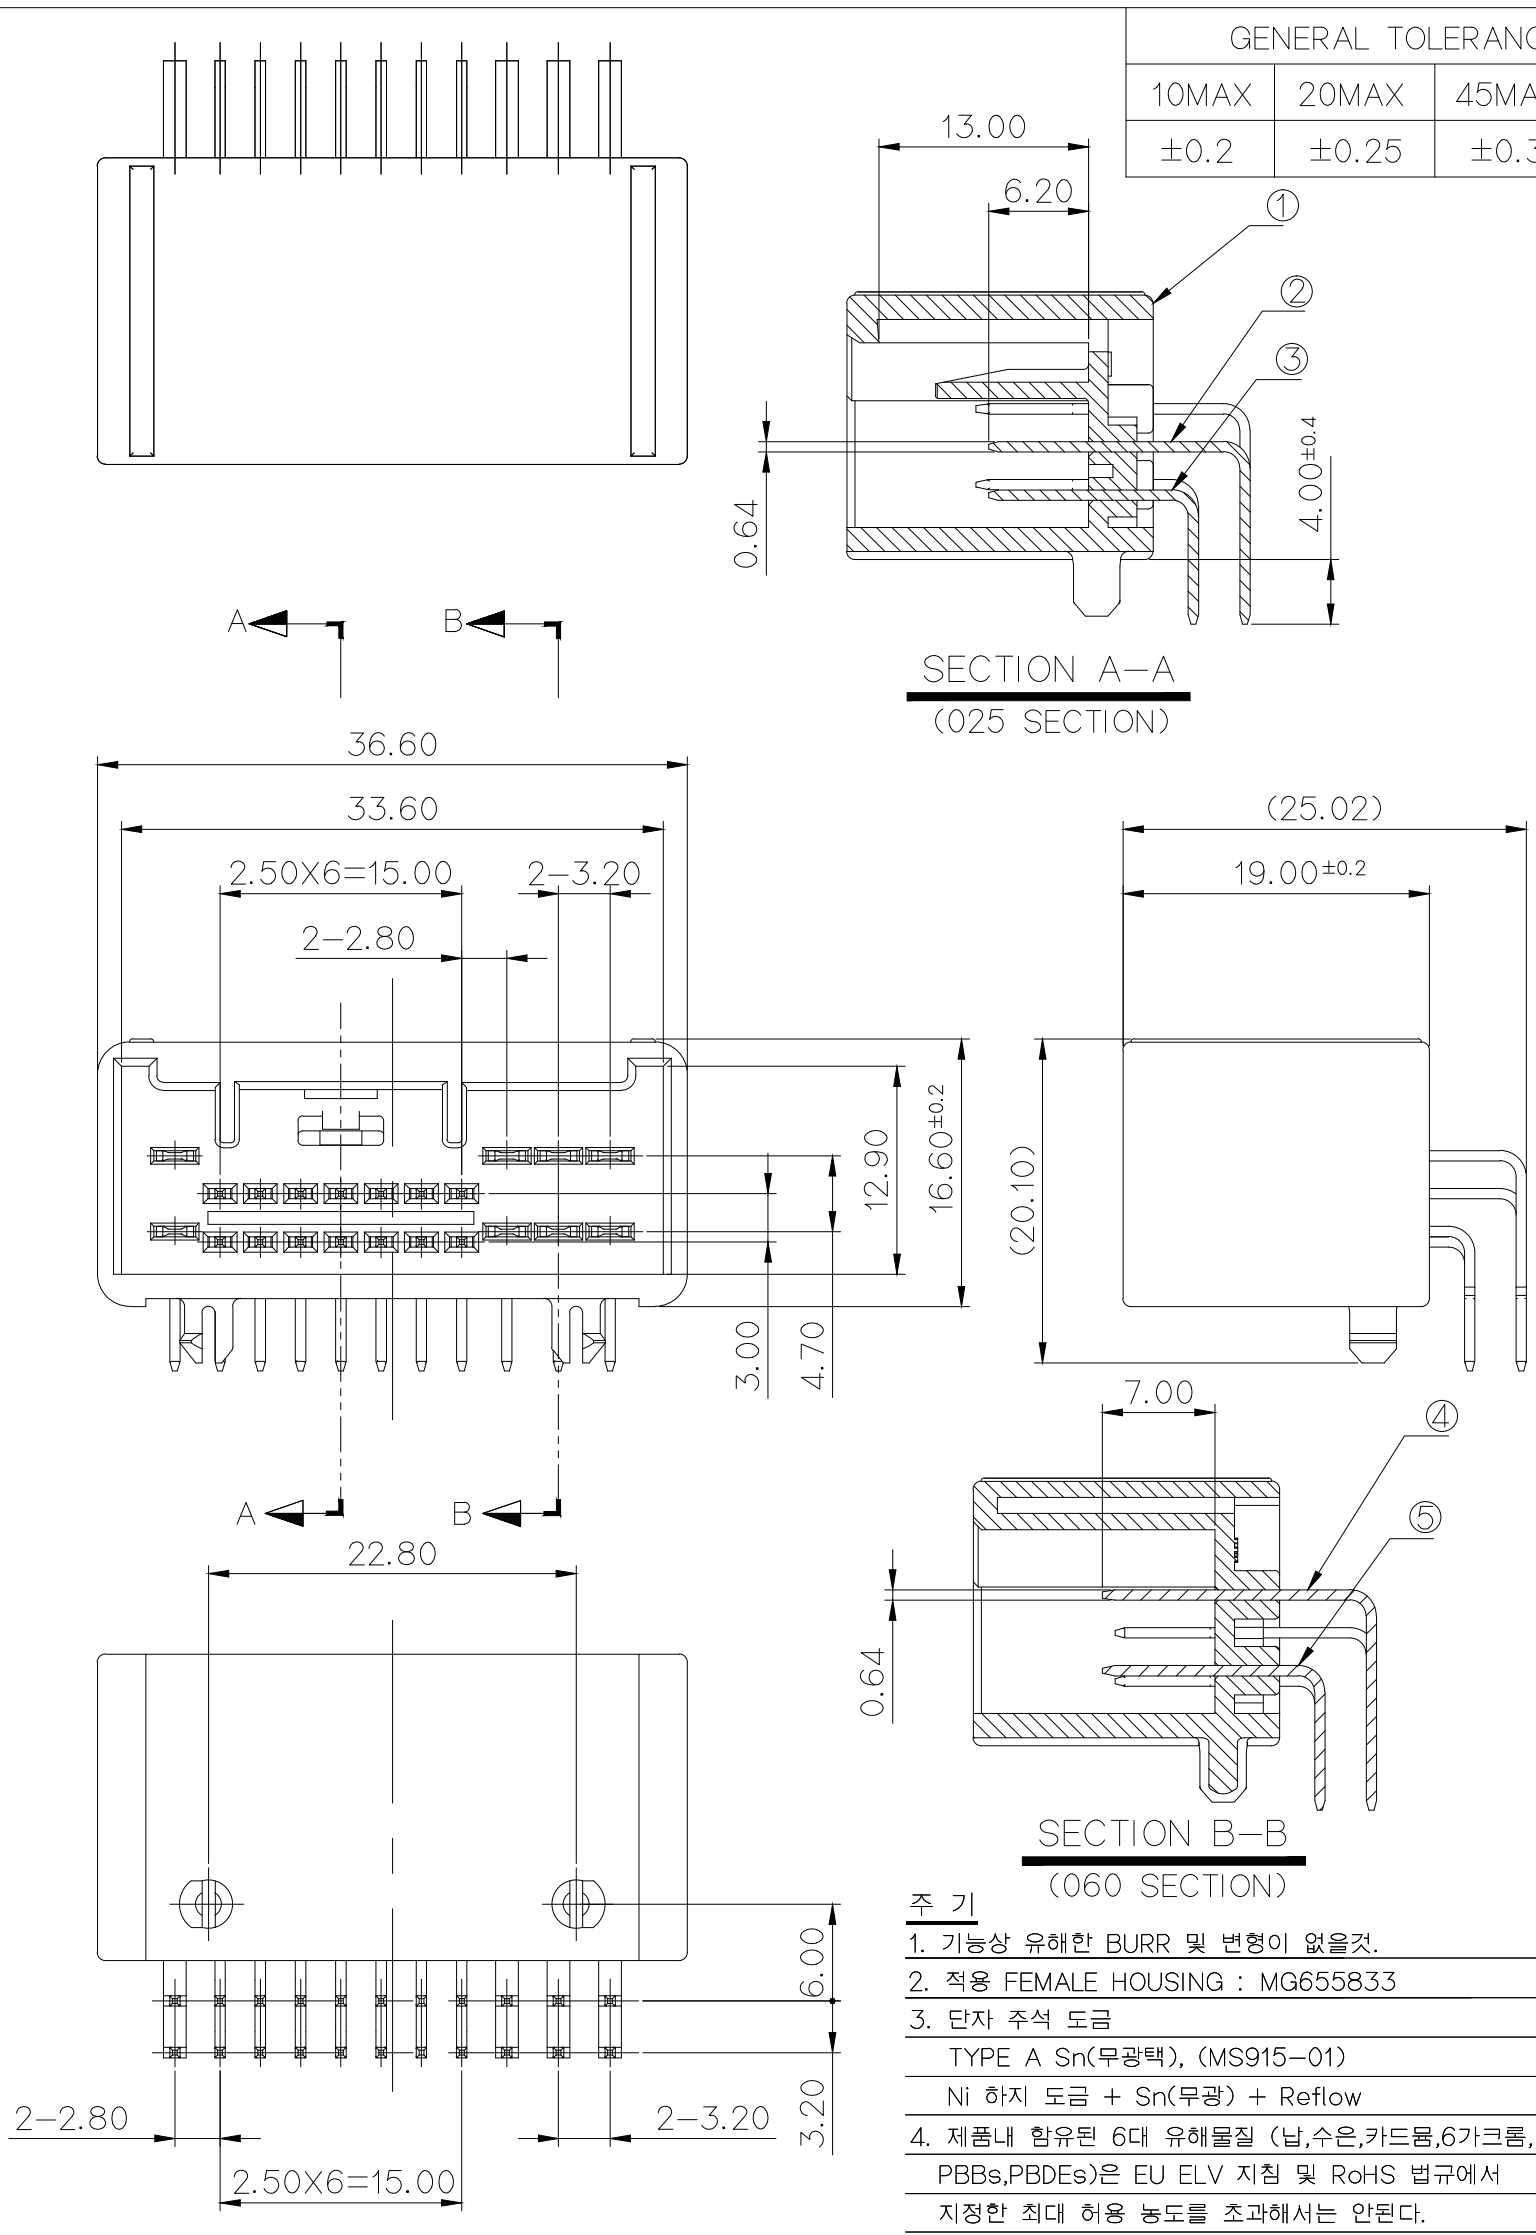

주 기

1. 기능상 유해한 BURR 및 변형이 없을것.


2. 적용 FEMALE HOUSING : MG655833

3. 단자 주석 도금
TYPE A Sn(무광택), (MS915-01)
Ni 하지 도금 + Sn(무광) + Reflow

4. 제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

GENERAL TOLERANCE (TERMINAL)					GENERAL TOLERANCE (HOUSING)								USED ON
10MAX	20MAX	45MAX	ANGLE	ECCENT	10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT		
±0.2	±0.25	±0.3	±30'	0.1	±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1		

NO.	MATERIAL	COLOR
* 0	PBT-GF30	NATURAL
1		RED
2		BLUE
20		JADE
3		YELLOW
4		GRAY
40		DARK GRAY
41		LIGHT GRAY
5		BLACK
6		DARK GREEN
7		BROWN
8		LIGHT GREEN
9		MAGENTA
11		ORANGE

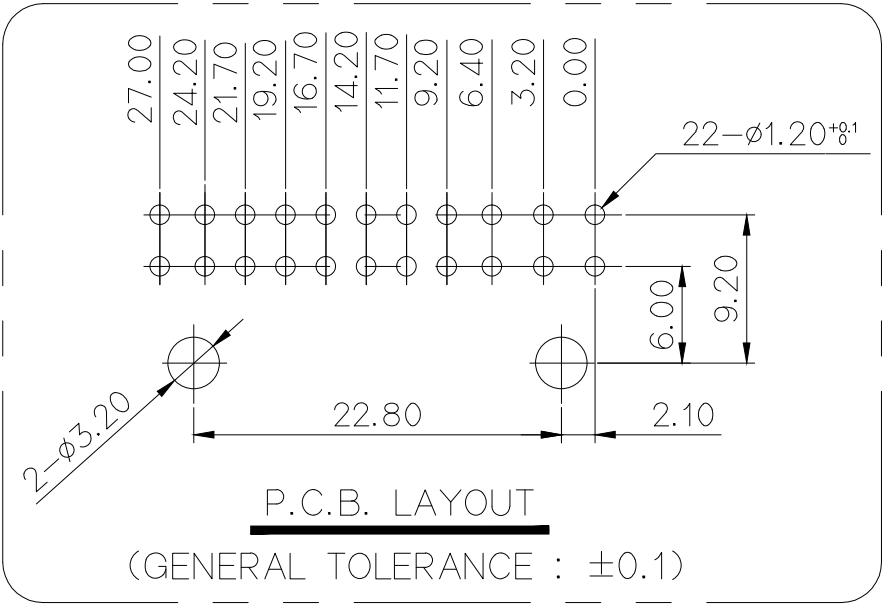


NOTE

1. MUST BE FREE OF BURR AND IMPERFECTION THAT AFFECT FUNCTION.

2. APPLICATION FEMALE HOUSING :MG655833

3. TIN-PLATED TERMINAL
TYPE A Sn(MATTE), (MS915-01)
Ni-PLATED UNDER + Sn(MATTE) + Reflow

4. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD,MERCURY, CADMIUM,HEXAVALENT CHROMIUM,PBBs,PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

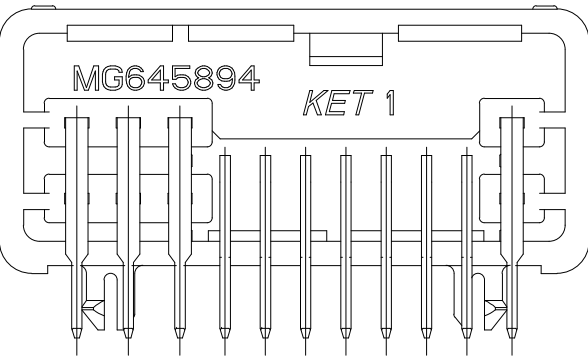

NO.	PART NAME	PART NO.	MATERIAL	FINISH	QTY.
①	025060 22M PCB HOUSING (HJT)	MG676351	SEE TABLE	SEE TABLE	1
②	025 PCB MALE TM'L-2.5PITCH (L)	ST792552-2	BRASS	Sn 후도금-무광 (Reflow)	7
③	025 PCB MALE TM'L-2.5PITCH (S)	ST792553-2	BRASS	Sn 후도금-무광 (Reflow)	7
④	060 PCB MALE TERMINAL (L)	ST792556-2	BRASS	Sn 후도금-무광 (Reflow)	4
⑤	060 PCB MALE TERMINAL (S)	ST792557-2	BRASS	Sn 후도금-무광 (Reflow)	4

APPROVED

2019-11-05

**KOREA ELECTRIC
TERMINAL CO., LTD.**
Korea Electric Te
rminal Co., LTD.

						MATERIAL	SEE TABLE	KOREA ELECTRIC TERMINAL CO., LTD.	
						FINISH	SEE TABLE		
						WIRE RANGE		CLASS	
						INSULATION		TYPE 025060	
LTR	REVISION RECORD		DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SCALE 2/1	PART NO. MG645894
DR.	JY.K '15.01.27		CHK.YSW '15.01.27				PART NAME		
CHK.			APP. BIN '15.01.27				025060 22M PCB ASSY (HJT)		