




GENERAL TOLERANCE (TERMINAL)

10 MAX	20 MAX	45 MAX	45VR	ANGLE	ECCENT
±0.2	±0.25	±0.3	±0.5	±30'	0.1

GENERAL TOLERANCE (HOUSING)

10 MAX	50 MAX	100 MAX	250 MAX	250 VR	ANGLE	ECCENT
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1

USED ON



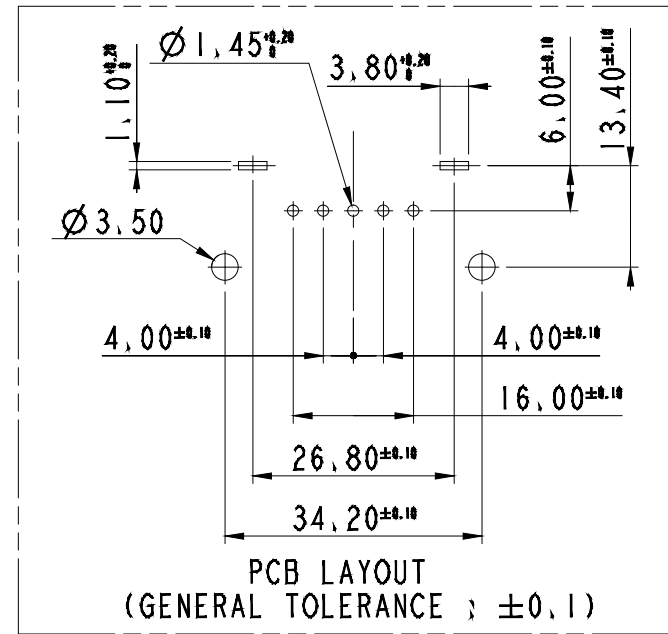
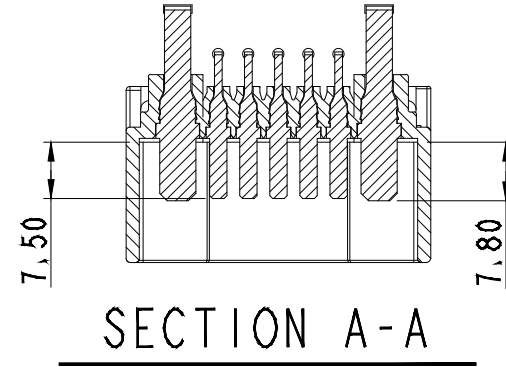



주 기

1. 기능상 유해한 BURR 및 WELDLINE 등이 없을 것,
2. 적용 HOUSING: MG651525
3. 단자 주석 도금 - TYPE A Sn(무광택), (MS915-01)
Ni 하지 도금 + Sn(무광) + REFLOW
4. 제품내 함유된 6대 유해물질 (납,수은,카드뮴, 6가크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다,

NOTE

1. MUST BE FREE OF FLASH, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
2. APPLICABLE HOUSING: MG651525
3. TIN-PLATED TERMINAL - TYPE A Sn(MATTE), (MS915-01)
Ni-PLATED UNDER + Sn(MATTE) + REFLOW
4. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY, CADMIUM, HEXAVALENT CHROMIUM, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

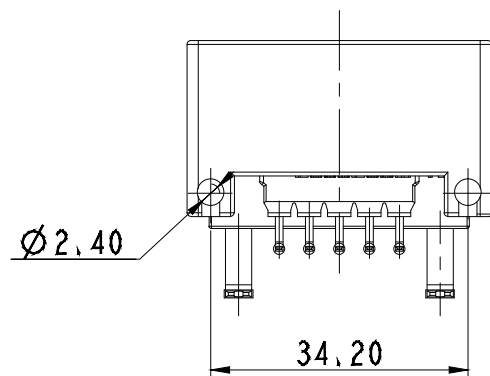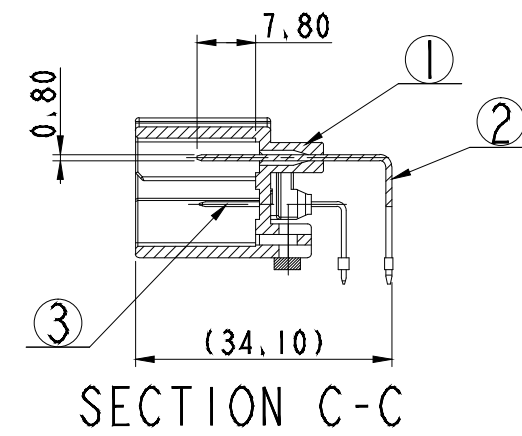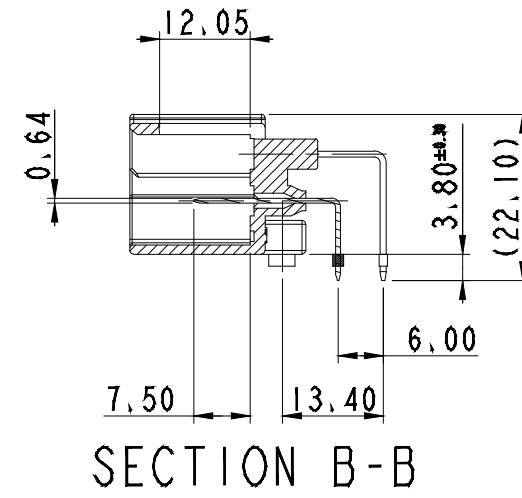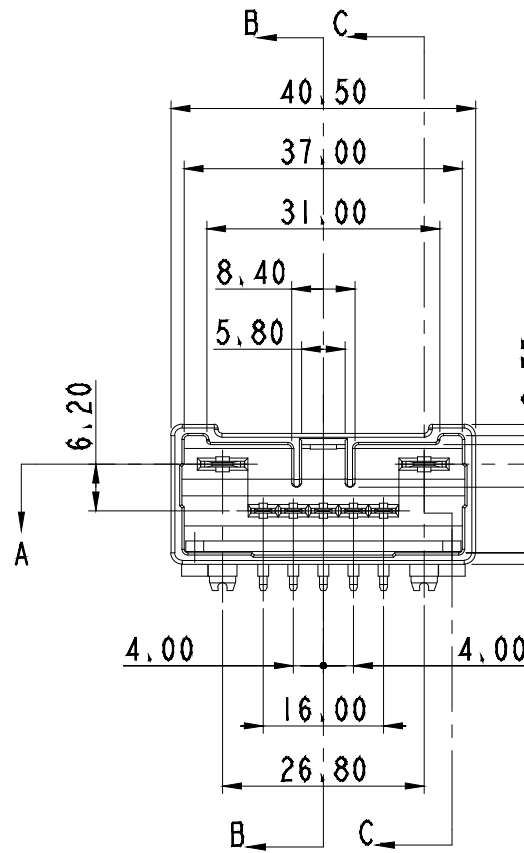

NO.	MATERIAL	COLOR
0	PBT+GF30	NATURAL
1		RED
2		BLUE
20		JADE
3		YELLOW
4		GRAY
40		DARK GRAY
41		LIGHT GRAY
* 5		BLACK
6		DARK GREEN
7		BROWN
8		LIGHT GREEN
9		MAGENTA
11		ORANGE

APPROVED

2019-11-05

KOREA ELECTRIC
TERMINAL CO., LTD.
Korea Electric Te
rminal Co., LTD.

ISSUE MARK

NO.	PART NAME	PART NO.	MATERIAL	FINISH	QTY
1	1809 7M PCB HOUSING(HZT)	MG676554	SEE TABLE	SEE TABLE	1
2	18711 PCB MALE TERMINAL	ST793365-2	BRASS	Sn 후도금(무광)-Reflow	2
3	09011 PCB MALE TERMINAL	ST793364-2	BRASS	Sn 후도금(무광)-Reflow	5

MATERIAL	SEE TABLE	KIE ENGINEERED	KOREA ELECTRIC TERMINAL CO., LTD.
FINISH	SEE TABLE		
WIRE RANGE			
INSULATION			
LTR	REVISION RECORD	DR, CHK, APP, DATE	TOLERANCE EXCEPT AS NOTED
DR, KSY, '15, 10, 27	CHK, KMH, '15, 10, 28	SCALE	1/1
CHK,	APP, BIN, '15, 10, 28	PART_NAME	1809 7M PCB ASSY(HZT)