

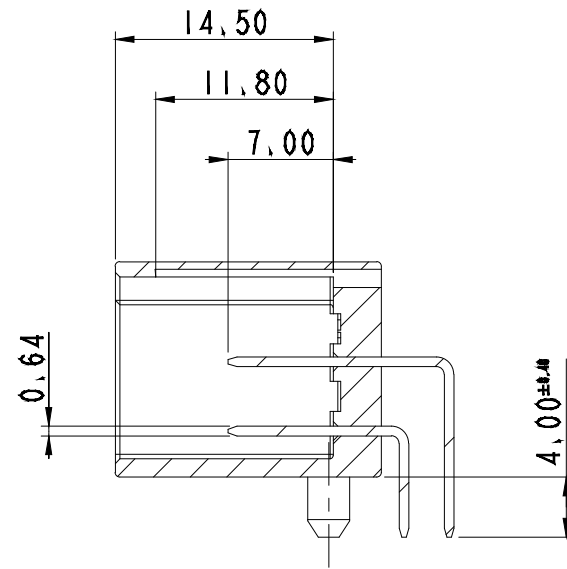
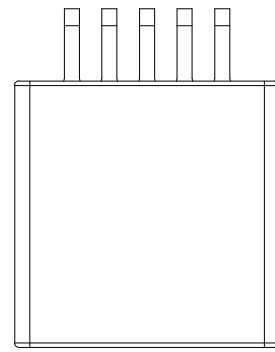


GENERAL TOLERANCE (TERMINAL)					GENERAL TOLERANCE (HOUSING)										USED ON
10 MAX	20 MAX	45 MAX	ANGLE	ECCENT	10 MAX	30 MAX	50 MAX	70 MAX	100 MAX	120 MAX	250 MAX	250 VR	ANGLE	ECCENT	
±0.2	±0.25	±0.3	±30'	0.1	±0.15	±0.2	±0.3	±0.4	±0.5	±0.75	±0.9	±1.4	±30°	0.1	

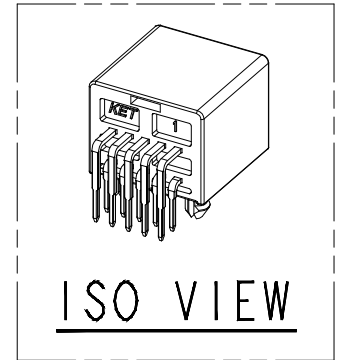

SECTION A-A

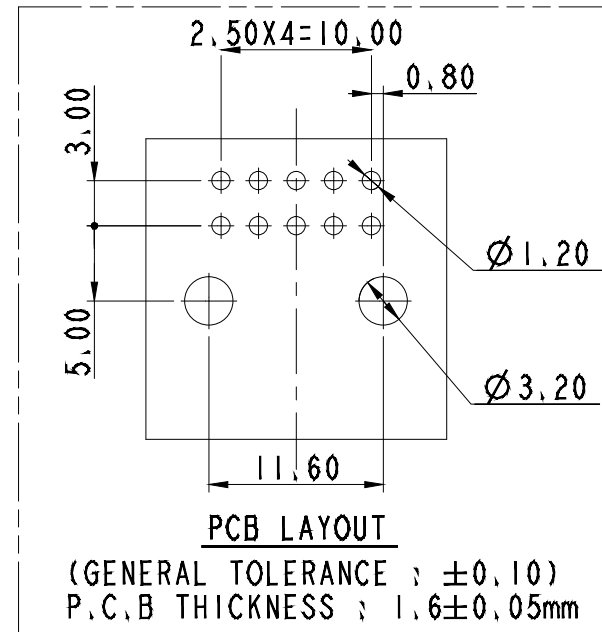






ISO VIEW

NOTE

1. 지시없는 R=0,30 으로 한다,
2. 기능상 유해한 침, 변형 및 BURR가 없을 것,
3. 적용 FEMALE CONN'T : 316991 (TYCO)
4. TERMINAL TIN 도금 사양 (Ni하지 : 1.0~3.0)
 - 1) SOLDER부 : Sn : 2.5~4.0 (Reflow)
 - 2) CONTACT부 : Sn : 1.0~2.0 (Reflow)
5. 제품내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다,

NOTE

1. UNLESS OTHERWISE SPECIFIED ALL RADIUS TO BE 0,3 RADIUS,
2. MUST BE FREE OF FLASH, SINK AND IMPERFECTION THAT AFFECT FUNCTION,
3. APPLICABLE FEMALE CONN'T : 316991 (TYCO)
4. TERMINAL TIN PLATING SPECIFICATION (Ni:1,0~3,0)
 - 1) SOLDER PART : Sn : 2,5~4,0 (Reflow)
 - 2) CONTACT PART : Sn : 1,0~2,0 (Reflow)
5. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY, CADMIUM, HEXAVALENT CHROMIUM, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION,

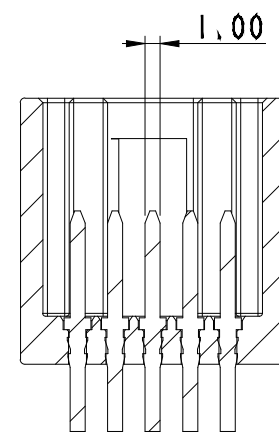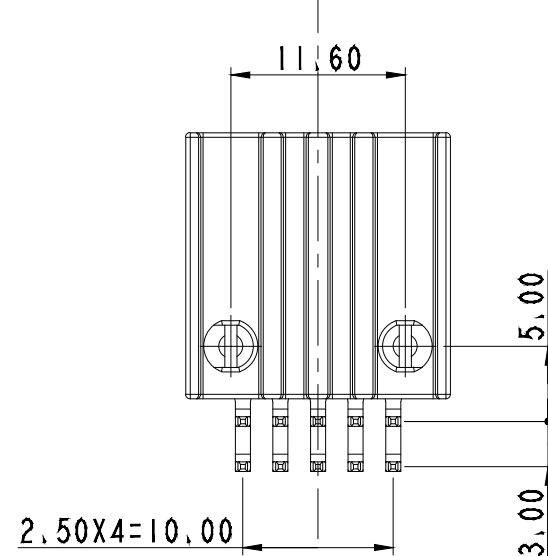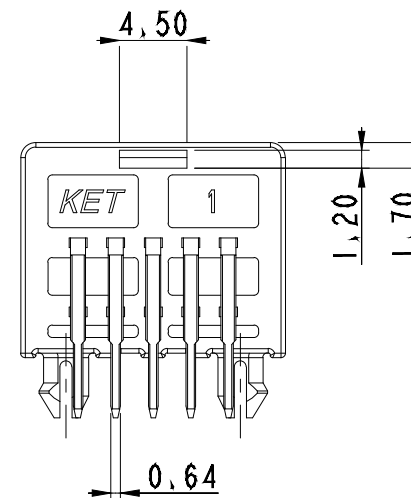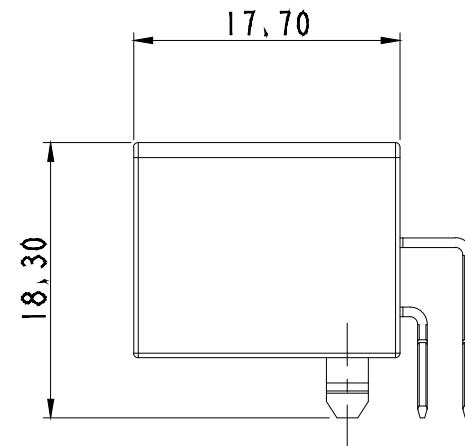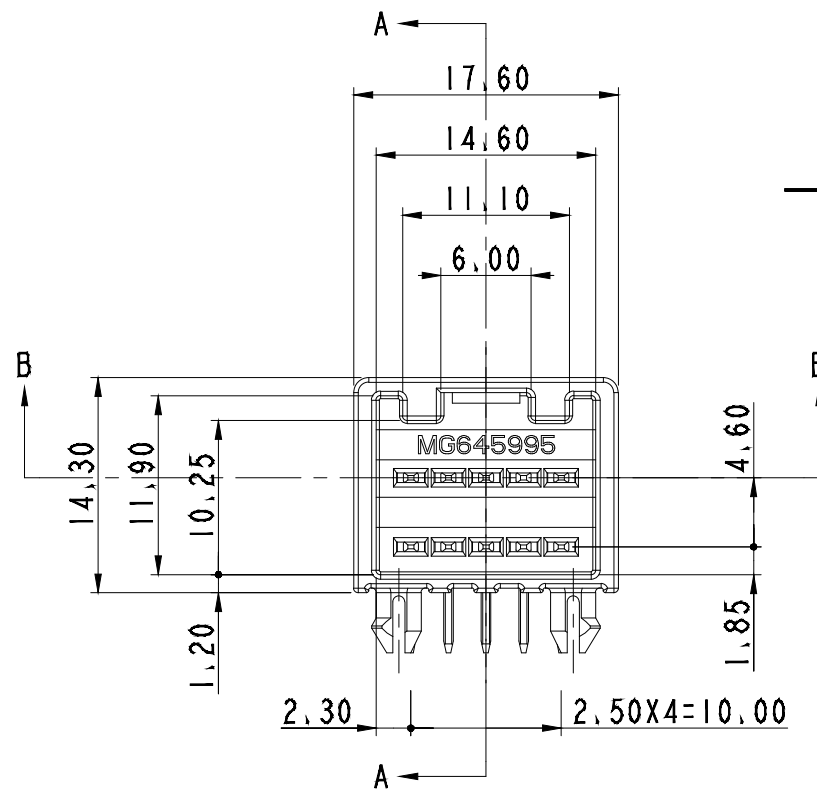

SECTION B-B

NO.	PART NAME	PART NO.	MATERIAL	FINISH	Q'TY
1	040 10M PCB HOUSING (H2T)	MG676597-5	PBT-GF30	BLACK	1
2	040 PCB MALE TERMINAL (L)	ST793381-2	C2600R-H (0.64t)	Sn*도금	5
3	040 PCB MALE TERMINAL (S)	ST793382-2	C2600R-H (0.64t)	Sn*도금	5

APPROVED

2019-11-05

**KOREA ELECTRIC
TERMINAL CO., LTD.**
Korea Electric Te
rminal Co., LTD.

ISSUE MARK

						MATERIAL	SEE TABLE	 KOREA ELECTRIC TERMINAL CO., LTD.			
						FINISH	SEE TABLE				
						WIRE RANGE	CLASS				
						INSULATION	TYPE				
LTR	REVISION RECORD		DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SEE TABLE	SCALE 2/1	PART NO.	MG645995-5
DR.	PYP 2016, 08, 22		CHK.	CKY	2016, 08, 22						
CHK.			APP.	SUK	2016, 08, 22		PART_NAME 040 10M PCB ASSY (H2T)				