

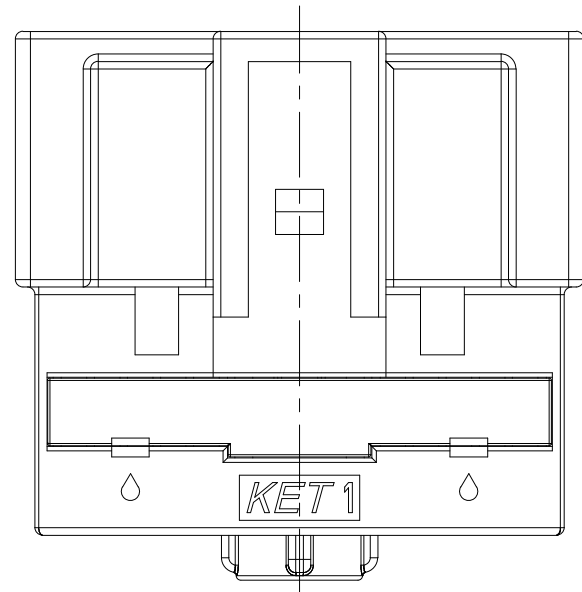
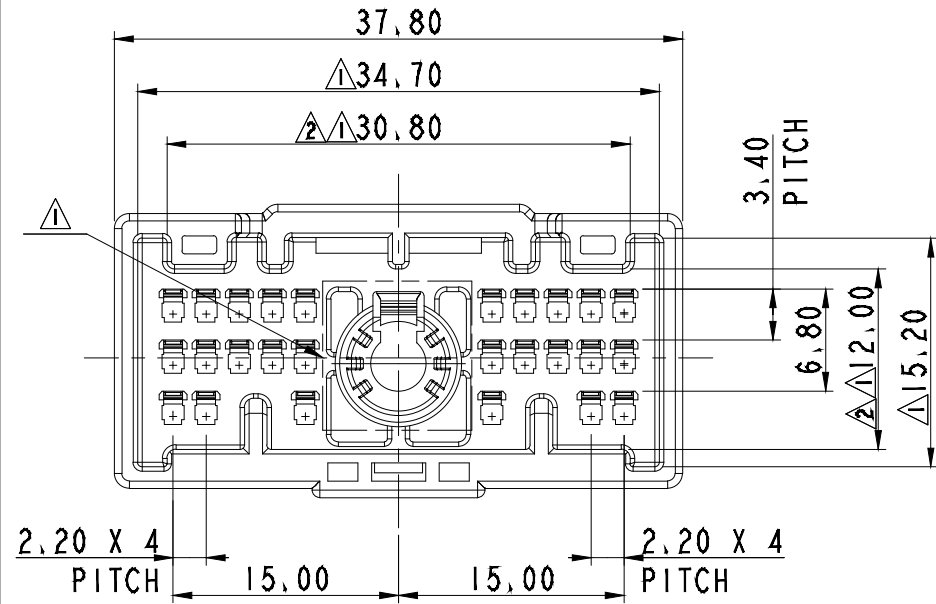


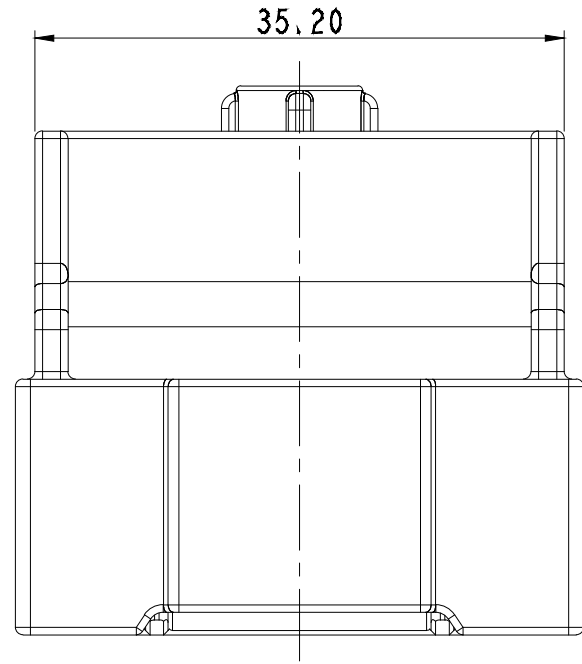



GENERAL TOLERANCE (HOUSING)										USED ON
10 MAX	30 MAX	50 MAX	70 MAX	100 MAX	120 MAX	250 MAX	250 VR	ANGLE	ECCENT	
±0.15	±0.2	±0.3	±0.4	±0.5	±0.75	±0.9	±1.4	±30'	0.1	

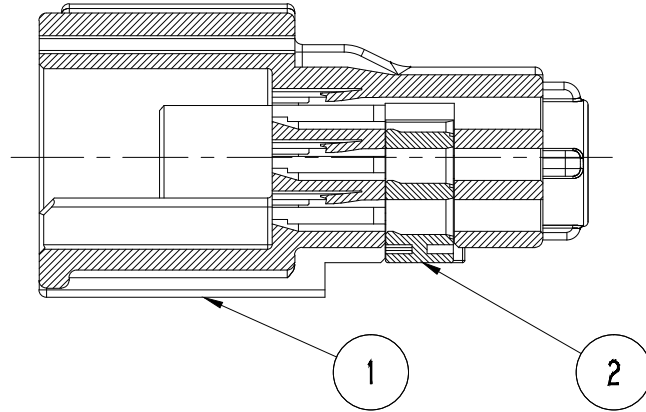

SECTION B-B
SCALE 2/1

NOTE

- MUST BE FREE OF FLASH, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
- 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY, CADMIUM, HEXAVALENT CHROMIUM, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.
- APPLICABLE TERMINAL(C025): ST741360, ST741361
APPLICABLE TERMINAL(PRESS FAKRA): △KR30202-20, KR30301-20(Au+Sn Plate), △KR00406-20

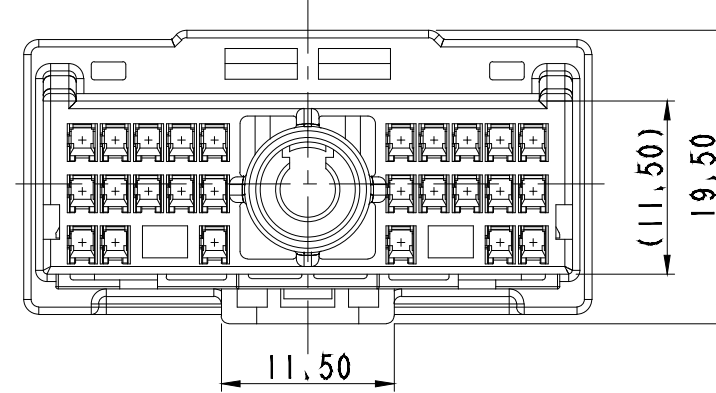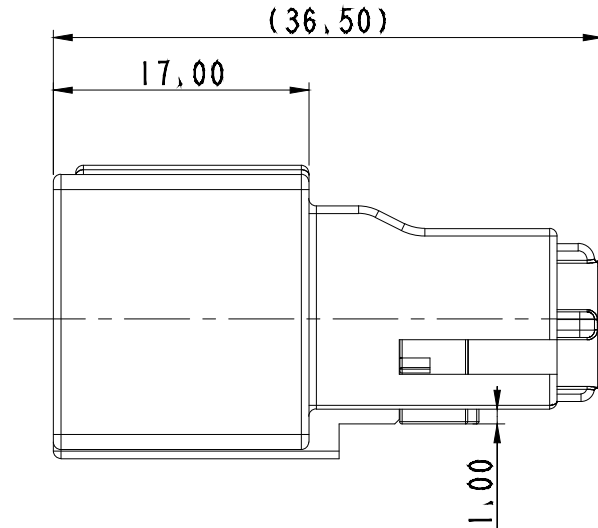

NO.	MATERIAL	COLOR
0	P B T	WHITE
1		RED
2		BLUE
20		JADE
3		YELLOW
4		GRAY
40		DARK GRAY
41		LIGHT GRAY
5		BLACK
6		DARK GREEN
7		BROWN
8		LIGHT GREEN
9		MAGENTA
10		ORANGE

APPROVED

2019-11-06

KOREA ELECTRIC
TERMINAL CO., LTD.
Korea Electric Te
rminal Co., LTD.

ISO VIEW

NO	PART NO.	PART NAME	MATERIAL	FINISH	Q'TY
1	MG676626	C025 FAKRA 27M HOUSING	PBT	NATURAL	1
2	MG676627	C025 FAKRA 27M SPACER	PBT	LIGHT GRAY	1

주 기

- 기능상 유해한 BURR 및 WELDLINE 등이 없을 것,
- 제품내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가크롬, PBBs, PBDEs) 은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서 사용하지 않는다.
- 적용 TERMINAL(C025): ST741360, ST741361
적용 TERMINAL(PRESS FAKRA): △KR30202-20, KR30301-20(Au+Sn Plate), △KR00406-20

					MATERIAL	SEE TABLE		
					FINISH	SEE TABLE		
					WIRE RANGE	SEE NOTE		
					INSULATION	SEE NOTE		
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SCALE 2/1	PART NO. MG646004
DR.	SYLEE '16.01.28	CHK.	KMH '16.02.18					
CHK.		APP.	BIN '16.02.18					
					PART_NAME			025 FAKRA 27M ASSY

ISSUE MARK

KIET KOREA ELECTRIC
ENGINEERED TERMINAL CO., LTD.

CLASS -

TYPE FAKRA HYBRID