

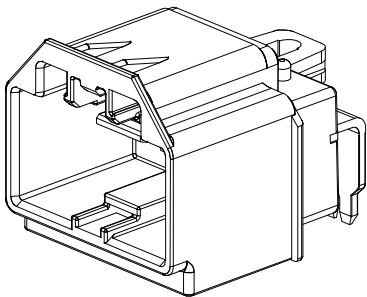


GENERAL TOLERANCE (TERMINAL)					GENERAL TOLERANCE (HOUSING)										USE ON
10MAX	20MAX	45MAX	ANGLE	ECCENT	10MAX	30MAX	50MAX	70MAX	100MAX	120MAX	250MAX	250VR	ANGLE		
±0.2	±0.3	±0.55	±30°	0.1	±0.15	±0.2	±0.3	±0.4	±0.5	±0.75	±0.9	±1.4	±30°		

NO	MATERIAL	COLOR
0	PBT-GF30+ASA	NATURAL
1		RED
2		BLUE
20		JADE
3		YELLOW
4		GRAY
40		DARK GRAY
41		LIGHT GRAY
5		BLACK
50		DARK GREEN
7		BROWN
8		LIGHT GREEN
9		MAGENTA
11		ORANGE

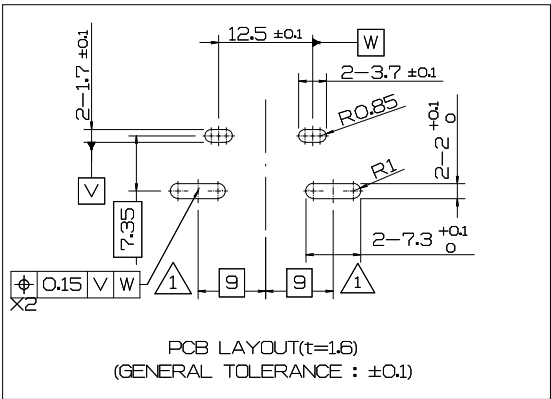

ISO VIEW

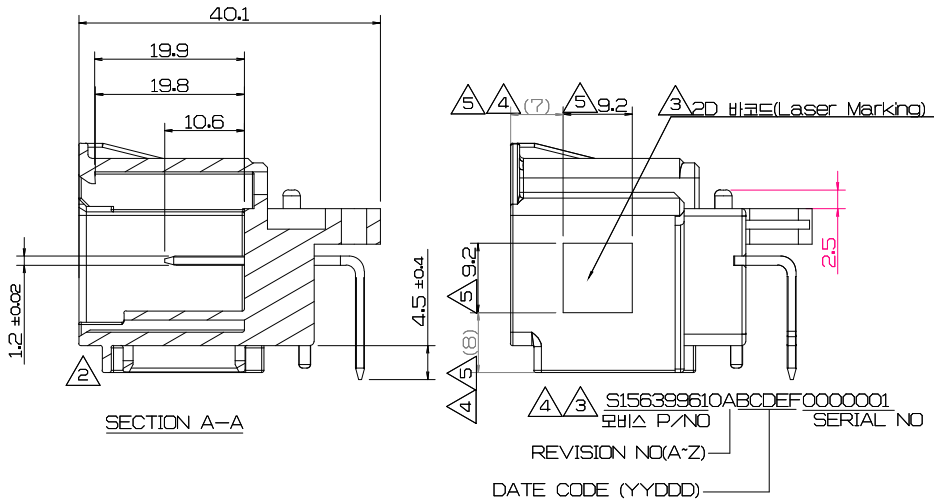

- 주요
- 기능성 유해한 BURR 및 WELDLINE 등이 없을 것.
 - MATCHING CONNECTOR : F719110DELPHI (CONNECTOR)
 - 제품내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 발규에서 지정한 최대 허용 농도를 초과해서는 안된다.
 - HEATSINK 마운팅부 체결토크 2Nm 시 체결 없을 것
 - ES91500-00 (일반가전용)
ES91500-02 (산업용 컨넥터 전자제품 관리규격)
MS201-01 (부품 재질 표기 방법)
MS201-02 (유해물질 금지 및 신고- 부품 및 재료)
MS300-08 (치상 내장재 연소성)
MS300-34 (내장재의 납세시험)
MS915-01 (전자주석도금-전기/전자 소자용)
MS941-03 (아세트산 및 가소성 고분자재료)-TYPE O
MS210-05 (PLASTIC 실험용-내장부품용)을 만족 할 것

※ Part List

NO	Part Name	MATERIAL	Color	Part No	Qty
3	TM MDPS 375 2M TERMINAL	COPPER ALLOY	-	SOLDER IN 1030um S-PAGE 25um10um FLOW	1
2	TM MDPS 375 2M TERMINAL	COPPER ALLOY	-	SOLDER IN 1030um S-PAGE 25um10um FLOW	1
1	TM MDPS 375 2M HOUSING	PBT+ASA-GF30 TYPE O	BLACK	-	1

REVISION RECORD	DATE	BY	CHK	APP	DATA	TOLERANCE	SCALE	PART NO
1	16.09.29	PUH	OK	SSH	16.09.29	2/1	2/1	MG646025-5
2	16.09.29	SSH	OK	SSH	16.09.29	2/1	2/1	MG646025-5