

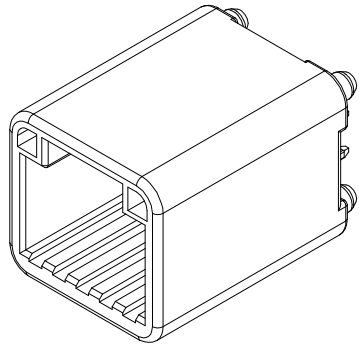
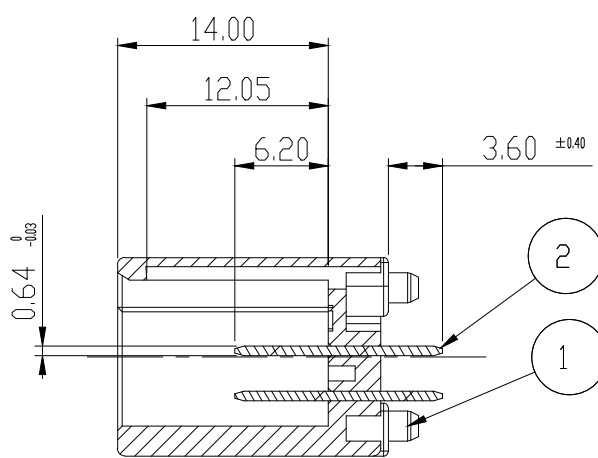
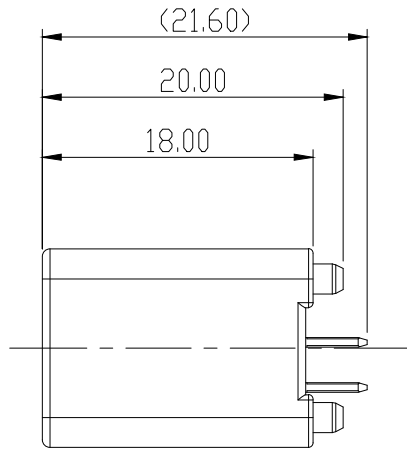
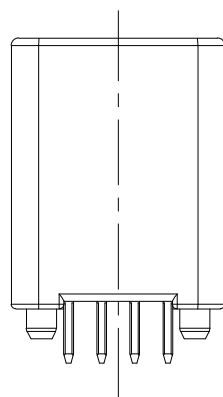


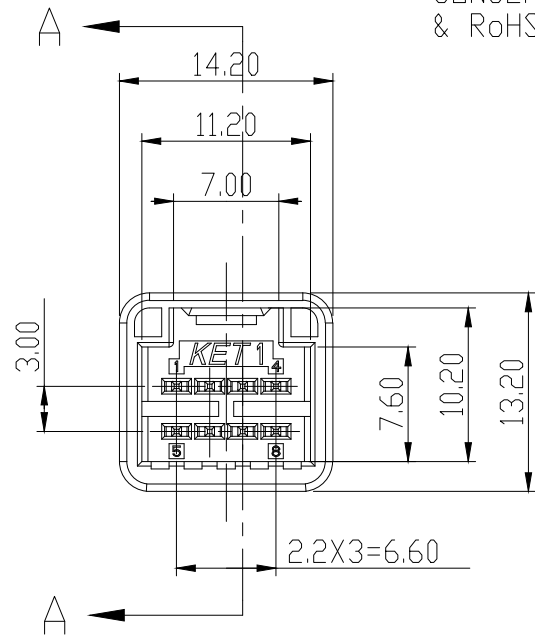

ISO VIEW

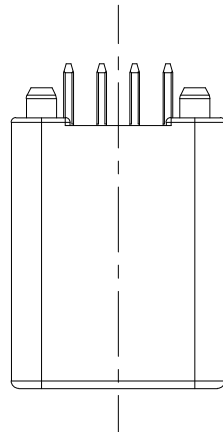

SECTION A-A



GENERAL TOLERANCE (TERMINAL)				
10 MAX	20 MAX	45 MAX	ANGLE	ECCENT
±0.2	±0.3	±0.55	±30'	0.1

GENERAL TOLERANCE (HOUSING)									
10 MAX	30 MAX	50 MAX	70 MAX	100 MAX	120 MAX	250 MAX	250VR	ANGLE	
±0.15	±0.20	±0.30	±0.40	±0.50	±0.75	±0.90	±1.4	±30'	

USED ON

- 주 기
1. 기능상 유해한 BURR 및 WELDLINE 등이 없을 것.
 2. 적용 FEMALE HOUSING : MG655587
 3. TERMINAL 도금 사양 : TYPE A Sn(무광택), (MS915-01)
Ni 하지 도금 + Sn(무광) + Reflow
 4. 제품내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

- NOTE
1. MUST BE FREE OF FLASH, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
 2. APPLICABLE FEMALE HOUSING : MG655587
 3. TERMINAL PLATING SPECIFICATION : TYPE A Sn(MATTE), (MS915-01)
Ni-PLATED UNDER + Sn(MATT) + Reflow
 4. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY, CADMIUM, HEXAVALENT CHROMIUM, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

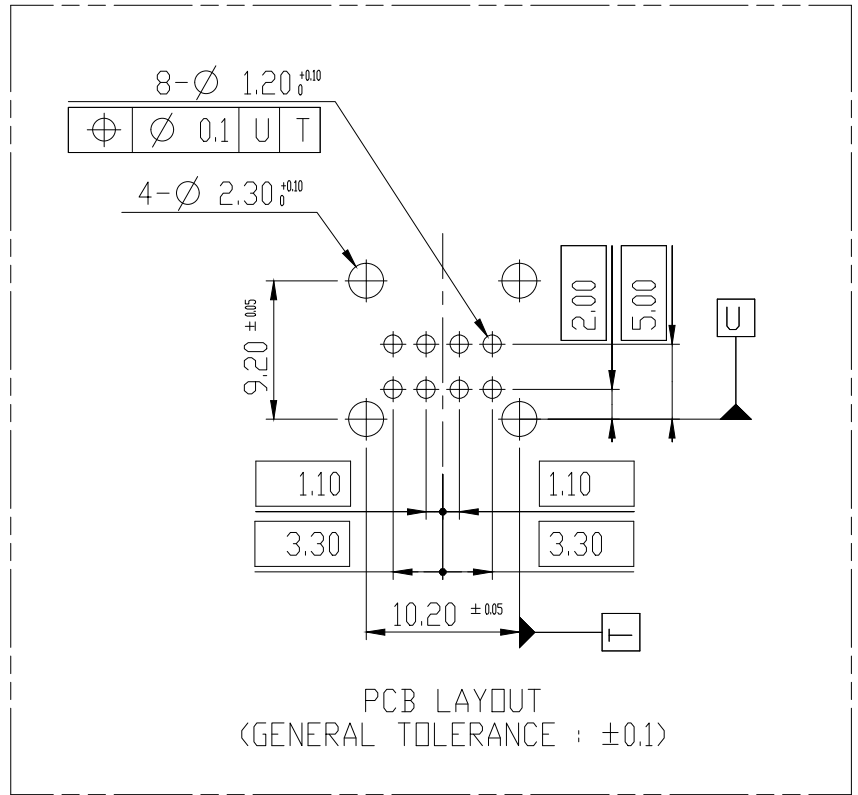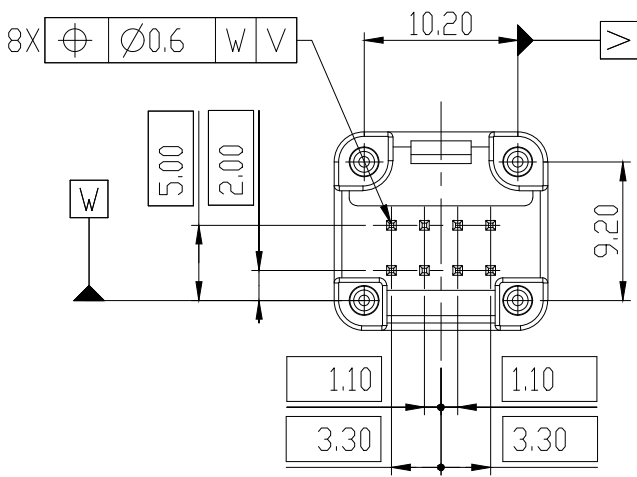

NO.	MATERIAL	COLOR
0	PBT-GF30	NATURAL
1		RED
2		BLUE
20		JADE
3		YELLOW
4		GRAY
40		DARK GRAY
41		LIGHT GRAY
5		BLACK
6		DARK GREEN
7		BROWN
8		LIGHT GREEN
9		MAGENTA
11		ORANGE



ISSUE MARK

NO.	PART NAME	PART NO	MATERIAL	FINISH	QTY
1	025 8M PCB HOUSING(VRT)	MG676817	PBT-GF30	NATURAL	1EA
2	025 PCB MALE TERMINAL	ST793437-2	BRASS	Sn 후도금(무광)-Reflow	8EA

						MATERIAL	SEE TABLE	 KOREA ELECTRIC TERMINAL CO., LTD.		
						FINISH	SEE TABLE			
						WIRE RANGE	CLASS		025	
						INSULATION	TYPE		VRT	
	경보 함격에 의한 도면 재작성 (ECO-1708-233)	AYT	LIM	SUK	17.08.18	TOLERANCE EXCEPT AS NOTED	SEE TABLE	SCALE 2/1	PART NO.	MG646041
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE					
DR. JDR 2016.11.15		CHK.								
CHK. SSH 2016.11.17		APP. BIN 2016.11.17				PART_NAME 025 8M PCB ASSY(VRT)				