

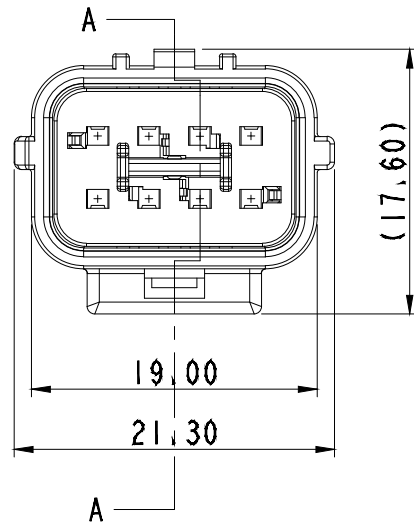


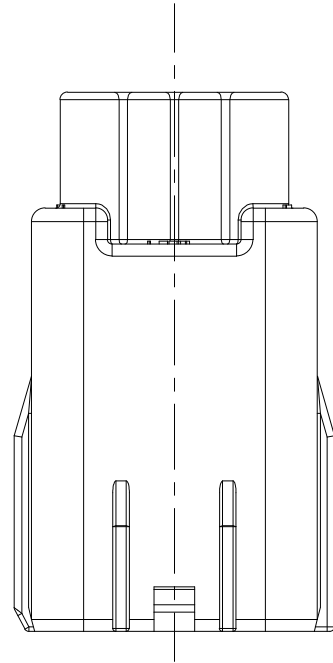


NO.	MATERIAL	COLOR
△ *	PBT	NATURAL
1		RED
2		BLUE
20		JADE
3		YELLOW
4		GRAY
40		DARK GRAY
41		LIGHT GRAY
* 5		BLACK
6		DARK GREEN
7		BROWN
8		LIGHT GREEN
9		MAGENTA
11		ORANGE

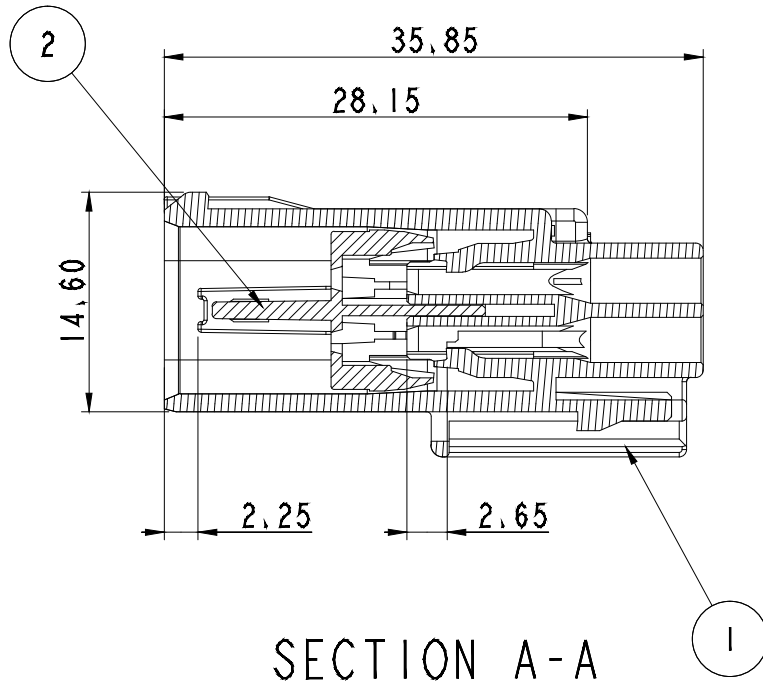

GENERAL TOLERANCE (HOUSING)

10 MAX	30 MAX	50 MAX	70 MAX	100 MAX	120 MAX	250 MAX	250 VR	ANGLE	ECCENT	USED ON
±0.15	±0.2	±0.3	±0.4	±0.5	±0.75	±0.9	±1.4	±30'	0.1	


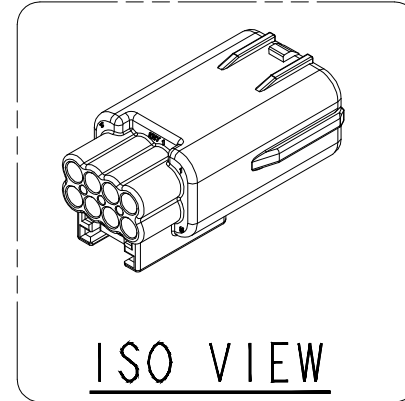


주 기

1. 기능상 유해한 BURR 및 WELDLINE 등이 없을 것,
2. 적용 TERMINAL : ST741378-3, ST741379-3
적용 DUMMY SEAL : MG685518
적용 CONNECTOR : MG656940-5
3. 제품내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다,

NOTE

1. MUST BE FREE OF BURR, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
2. APPLICABLE TERMINAL : ST741378-3, ST741379-3
APPLICABLE DUMMY SEAL : MG685518
APPLICABLE CONNECTOR : MG656940-5
3. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY, CADMIUM, HEXAVALENT CHROMIUM, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

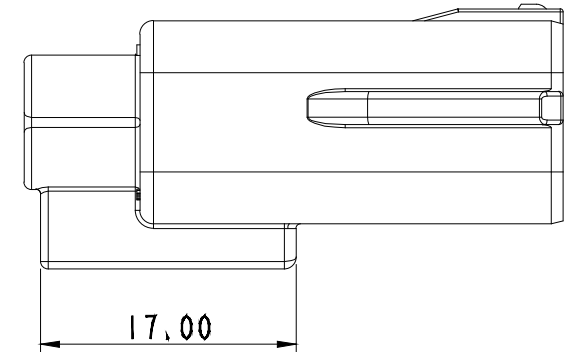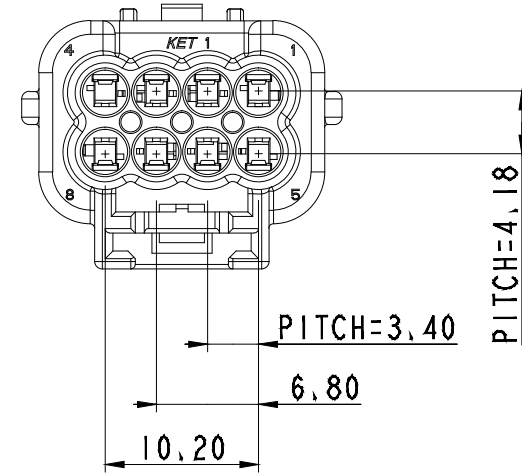

APPROVED

2019-11-06

KOREA ELECTRIC
TERMINAL CO., LTD.
Korea Electric Te
rminal Co., LTD.

ISSUE MARK

NO.	PART NAME	PART NO.	MATERIAL	COLOR	QTY.
1	C025 WP 8M HOUSING	MG676924	SEE TABLE	SEE TABLE	1
2	C025 WP 8M FRONT HOLDER	MG676925	PBT-GF30	NATURAL △ BLACK	1

					MATERIAL	SEE TABLE		
					FINISH	SEE TABLE		
					WIRE RANGE	-		
					INSULATION	-		
					TOLERANCE EXCEPT AS NOTED	SEE TABLE	SCALE 2/1	
					DR, KNY 2017.4.31	CHK, CKI 2017.4.31		
					CHK,	APP, LJE 2017.4.31		
					PART_NAME	C025 WP 8M ASSY		

KOREA ELECTRIC
TERMINAL CO., LTD.

CLASS WP

TYPE C025

PART NO. MG646043