
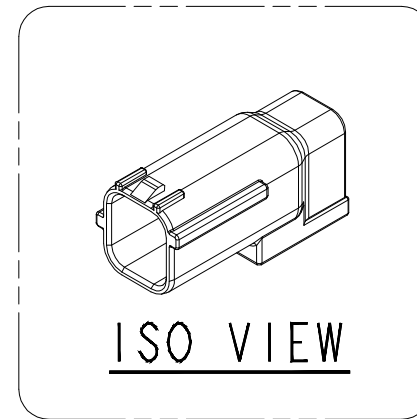
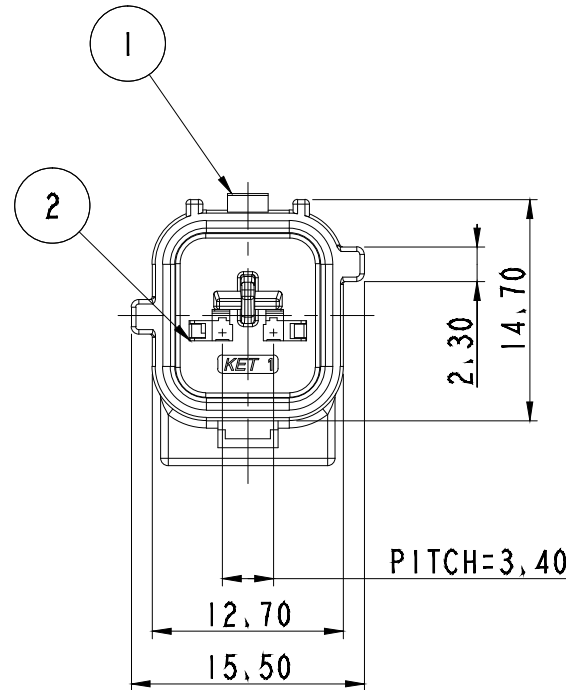
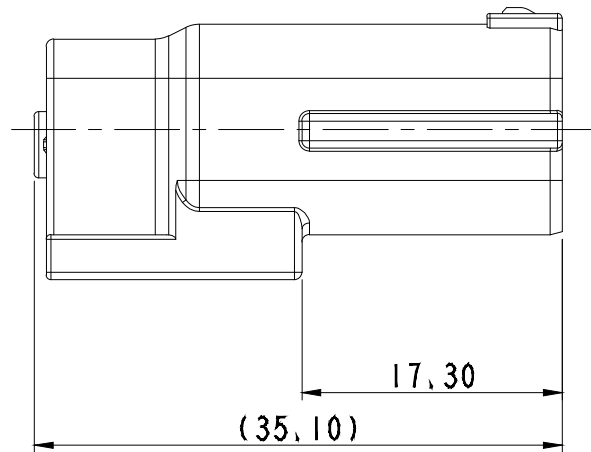
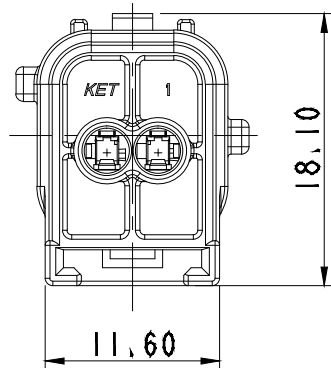


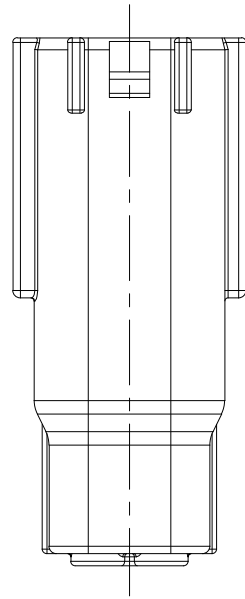

NO.	MATERIAL	COLOR
0	P B T	NATURAL
1		RED
2		BLUE
20		JADE
3		YELLOW
4		GRAY
40		DARK GRAY
41		LIGHT GRAY
* 5		BLACK
6		DARK GREEN
7		BROWN
8		LIGHT GREEN
9		MAGENTA
11		ORANGE

GENERAL TOLERANCE(HOUSING)										USED ON
10 MAX	30 MAX	50 MAX	70 MAX	100 MAX	120 MAX	250 MAX	250 VR	ANGLE	ECCENT	
±0.15	±0.2	±0.3	±0.4	±0.5	±0.75	±0.9	±1.4	±30'	0.1	

주 기

1. 기능상 유해한 BURR 및 WELDLINE 등이 없을 것,
2. 적용 TERMINAL : ST741378-3, 1379-3
적용 CONNECTOR : MG656894-5
3. 제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다,

NOTE

1. MUST BE FREE OF BURR, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION,
2. APPLICABLE TERMINAL : ST741378-3, 1379-3
APPLICABLE CONNECTOR : MG656894-5
3. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD,MERCURY, CADMIUM,HEXAVALENT CHROMIUM,PBBs,PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION,

NO.	PART NAME	PART NO.	MATERIAL	COLOR	QTY.
1	C025 WP 2M HOUSING(SHORT BAR)	MG676748-5	PBT	BLACK	1
2	C025 WP 2M FRONT HOLDER(SHORT BAR)	MG676747	PBT GF30	NATURAL	1

				MATERIAL	SEE TABLE	 KOREA ELECTRIC TERMINAL CO., LTD.
				FINISH	SEE TABLE	
				WIRE RANGE		
				INSULATION		CLASS WP
				TOLERANCE EXCEPT AS NOTED	SCALE 1/1	TYPE C025
				PART NO.		MG646056-5
				PART_NAME		
				C025 WP 2M ASSY(SHORT BAR)		

APPROVED

2019-11-06

KOREA ELECTRIC
TERMINAL CO., LTD.
Korea Electric Te
rminal Co., LTD.

ISSUE MARK