

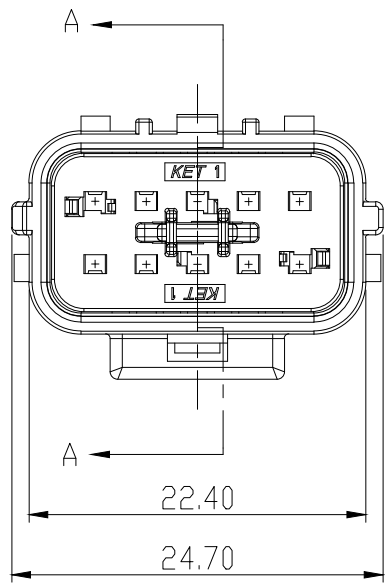
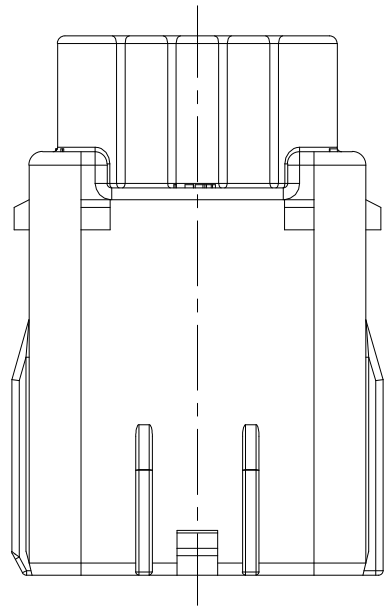


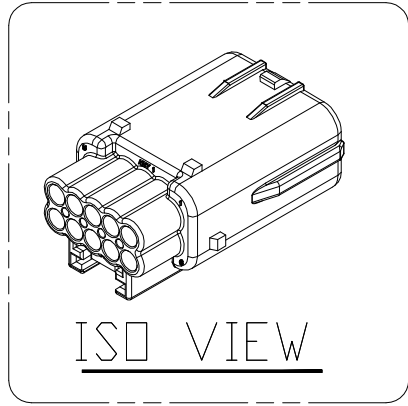

NO.	MATERIAL	COLOR
0	SEE TABLE	NATURAL
1		RED
2		BLUE
20		JADE
3		YELLOW
4		GRAY
40		DARK GRAY
41		LIGHT GRAY
* 5		BLACK
6		DARK GREEN
7		BROWN
8		LIGHT GREEN
9		MAGENTA
11		ORANGE

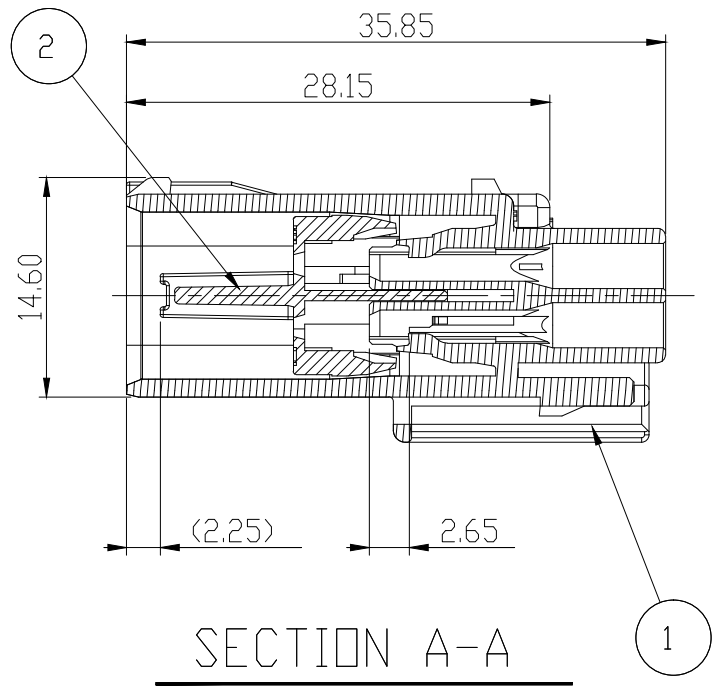

GENERAL TOLERANCE (HOUSING)										USED ON
10MAX	30MAX	50MAX	70MAX	100MAX	120MAX	250MAX	250VR	ANGLE	ECCENT	
±0.15	±0.2	±0.3	±0.4	±0.50	±0.75	±0.90	±1.4	±30'	0.1	

- 주 기
- 기능상 유해한 BURR 및 WELDLINE 등이 없을 것.
 - 적용 TERMINAL : ST741378-3, 1379-3
적용 CONNECTOR : MG656900-5
적용 CLIP : MG630418, MG630559, MG631467, MG630922, MG634647, MG633713, MG633061
 - 제품내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가크롬, PBBs, PBDEs) 은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.
- NOTE
- MUST BE FREE OF BURR, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
 - APPLICABLE TERMINAL : ST741378-3, 1379-3
APPLICABLE CONNECTOR : MG656900-5
APPLICABLE CLIP : MG630418, MG630559, MG631467, MG630922, MG634647, MG633713, MG63306
 - 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY, CADMIUM, HEXAVALENT CHROMIUM, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

NO.	PART NAME	PART NO.	MATERIAL	COLOR	QTY.
1	C025 WP 10M HOUSING	MG676760-5	P B T	BLACK	1
2	C025 WP 10M FRONT HOLDER	MG676761	PBT-GF30	NATURAL	1

				MATERIAL	SEE TABLE	KIET ENGINEERED	KOREA ELECTRIC TERMINAL CO., LTD.
				FINISH	SEE TABLE		
				WIRE RANGE	-	CLASS	WP
				INSULATION	-	TYPE	C025
				TOLERANCE EXCEPT AS NOTED	SEE TABLE	SCALE	2/1
				PART_NAME	C025 WP 10M ASSY		

APPROVED

2019-11-06

KOREA ELECTRIC
TERMINAL CO., LTD.
Korea Electric Te
rminal Co., LTD.

ISSUE MARK