



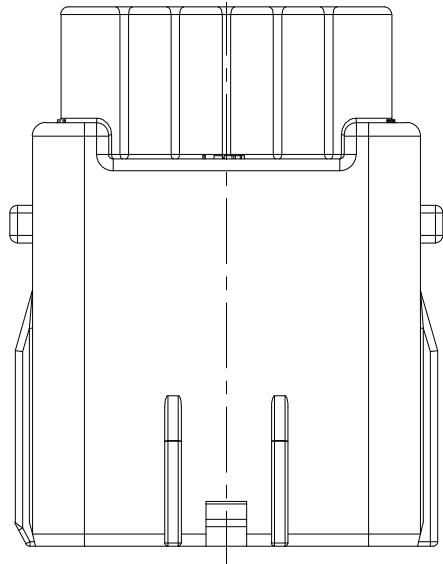




NO.	MATERIAL	COLOR
0	SEE TABLE	NATURAL
1		RED
2		BLUE
20		JADE
3	* *	YELLOW
4		GRAY
40		DARK GRAY
41		LIGHT GRAY
5		BLACK
6		DARK GREEN
7		BROWN
8		LIGHT GREEN
9		MAGENTA
11		ORANGE

GENERAL TOLERANCE (HOUSING)										USED ON
10MAX	30MAX	50MAX	70MAX	100MAX	120MAX	250MAX	250VR	ANGLE	ECCENT	
±0.15	±0.2	±0.3	±0.4	±0.50	±0.75	±0.90	±1.4	±30'	0.1	

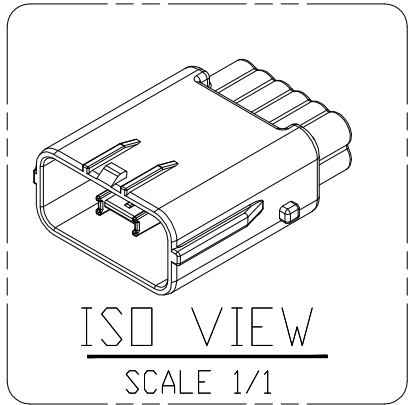

- 주기
- 기능상 유해한 BURR 및 WELDLINE 등이 없을 것.
 - 적용 TERMINAL : ST741378-3, ST741379-3
적용 DUMMY SEAL : MG685518
적용 CONNECTOR : MG656901
적용 WIRE COVER : MG635851
 - 제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

- NOTE
- MUST BE FREE OF BURR, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
 - APPLICABLE TERMINAL : ST741378-3, ST741379-3
APPLICABLE DUMMY SEAL : MG685518
APPLICABLE CONNECTOR : MG656901
APPLICABLE WIRE COVER : MG635851
 - 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD,MERCURY, CADMIUM,HEXAVALENT CHROMIUM,PBBs,PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

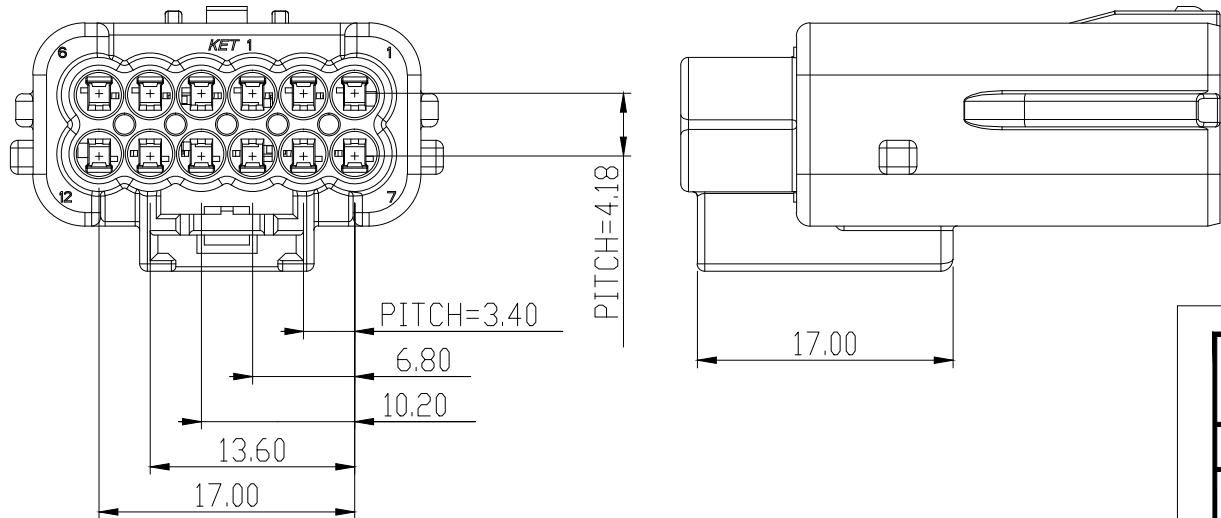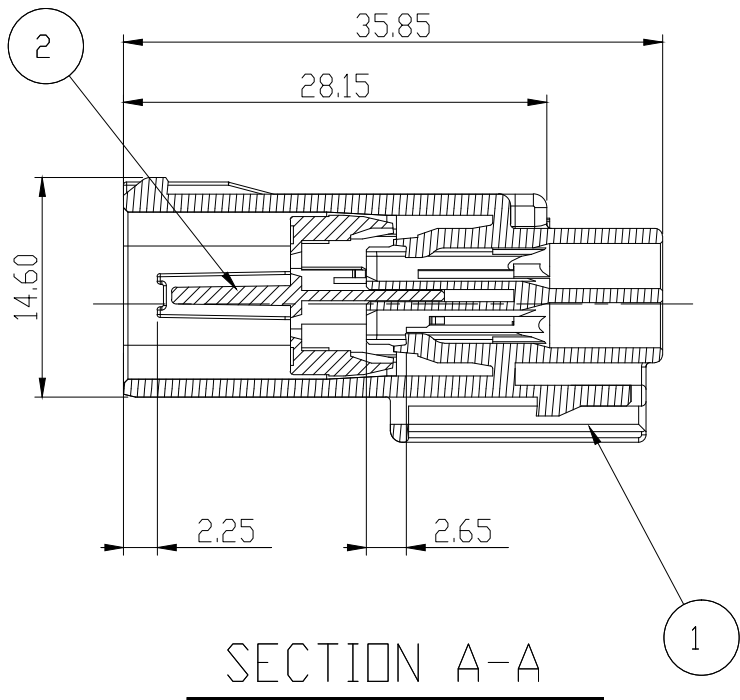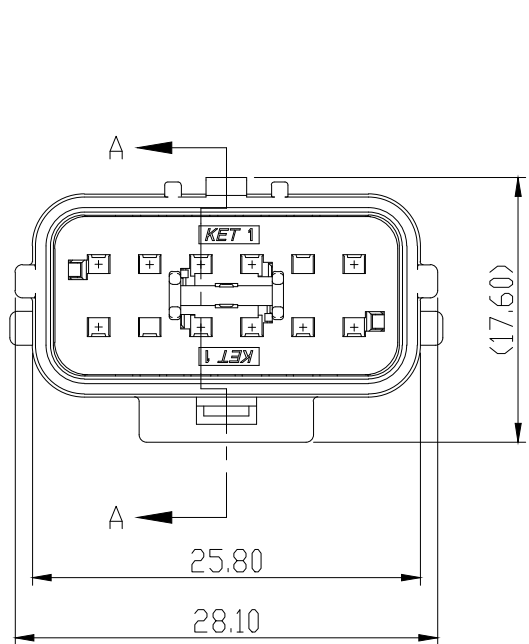

APPROVED

2019-11-06

**KOREA ELECTRIC
TERMINAL CO., LTD.**
Korea Electric Te
rminal Co., LTD.

ISSUE MARK

NO.	PART NAME	PART NO.	MATERIAL	COLOR	QTY.
1	C025 WP 12M HOUSING	MG676764	P B T	SEE TABLE	1
2	C025 WP 12M FRONT HOLDER	MG676765	PBT-GF30	NATURAL △BLACK	1

						MATERIAL	SEE TABLE	KIET ENGINEERED	KOREA ELECTRIC TERMINAL CO., LTD.
						FINISH	SEE TABLE		
						WIRE RANGE	—	CLASS	WP
						INSULATION	—	TYPE	C025
	ECD-1803-031 근거 도면 변경 (IN-LINE 작업시 시인성 확보 관련 색상 추가)	STJ	HYJ	CJH	18.03.06	TOLERANCE EXCEPT AS NOTED	SEE TABLE	SCALE 2/1	PART NO. MG646062
	검보 합격에 의한 양산도면출도 (ECD-1711-290)	AYT	AJH	CMS	17.12.05				
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE				
DR. LJJ 2016.8.31		CHK. CKI 2016.8.31							
CHK. LJE 2016.8.31		APP. BIN 2016.8.31				PART_NAME C025 WP 12M ASSY			