
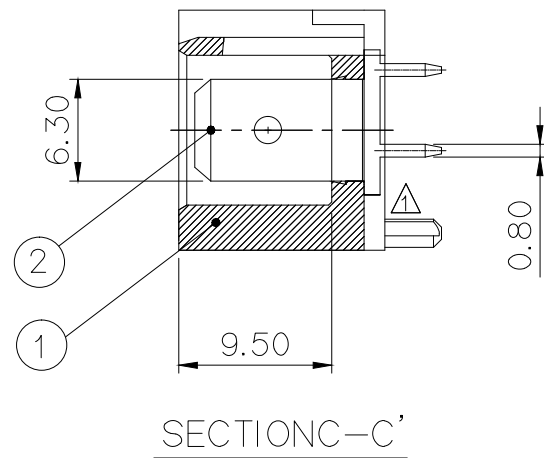
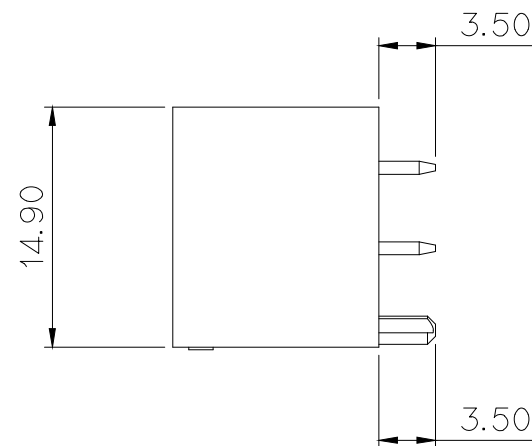
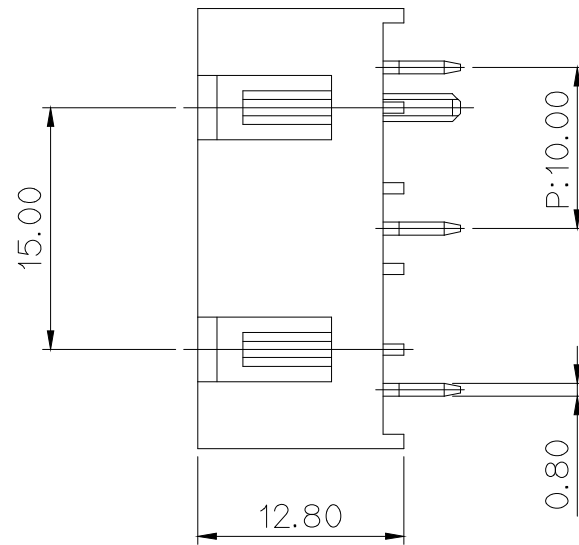


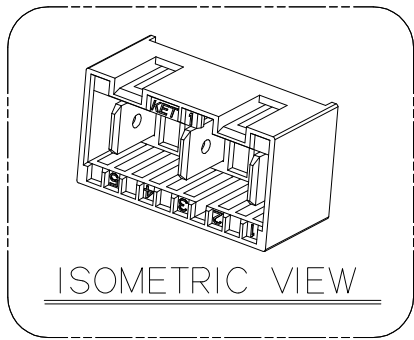

NO.	PART NAME	MATERIAL	Q'TY	FINISH
1	250 5M PCB HOUSING	PA66(GF)	1	NATURAL
2	250 PCB TAB TERMINAL	BRASS	3	TIN-PLATE



GENERAL TOLERANCE (HOUSING)					USED ON
10MAX	50MAX	100MAX	100 VR	()	
±0.25	±0.35	±0.55	±0.95	±0.1	

주 기

1. 지시하지 않은 반경 R은 0.2~0.3로 한다.
2. 기능상 유해한 BURR 및 WELDLINE 없을 것.
3. 적용 HOUSING : MG615627-005
4. 제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

NOTE

1. UNLESS OTHERWISE SPECIFIED ALL RADIUS
TO BE 0.2–0.3 RADIUS.
2. MUST BE FREE OF BURR, WELDLINE
AND IMPERFECTION THAT AFFECT FUNCTION.
3. APPLICABLE HOUSING : MG615627–005
4. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY,
CADMIUM, HEXAVALENT CHROMIUM, PBBs, PBDEs) SHALL
NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION
PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

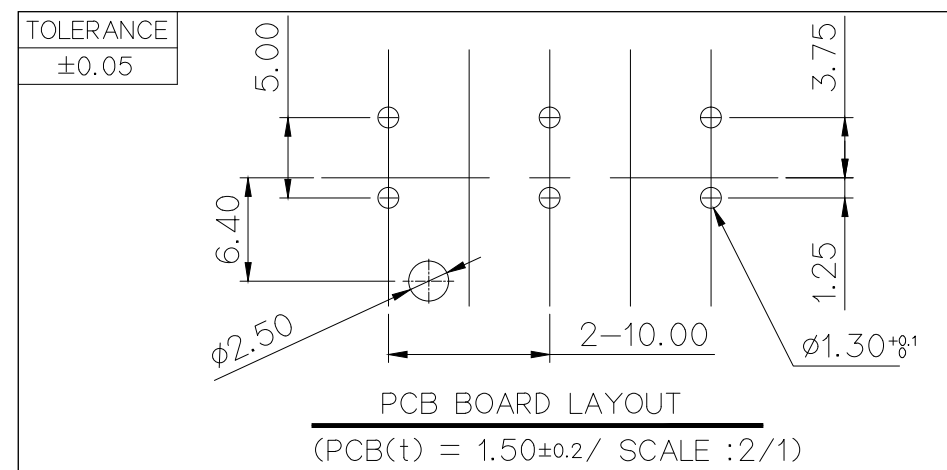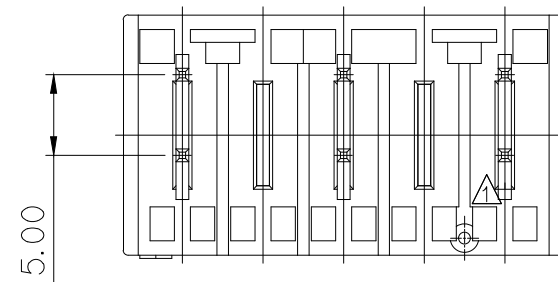

						MATERIAL	SEE TABLE	 KOREA ELECTRIC TERMINAL CO., LTD.	
						FINISH	SEE TABLE		
	ECO-1612-298큰거 도면 재작성	KSH		BUC	'16.12.01	WIRE RANGE	CLASS		250
	ECO-1611-190큰거 도면 재작성	LCM	PSH	BUC	'16.11.10	INSULATION	TYPE		PCB
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SCALE 2/1	PART NO. MG646067-005	
DR.	KSH. '16.10.24	CHK.				PART NAME	250 5M PCB ASS'Y		
CHK.		APP.	BUC.	'16.10.25					



ISSUE MARK