
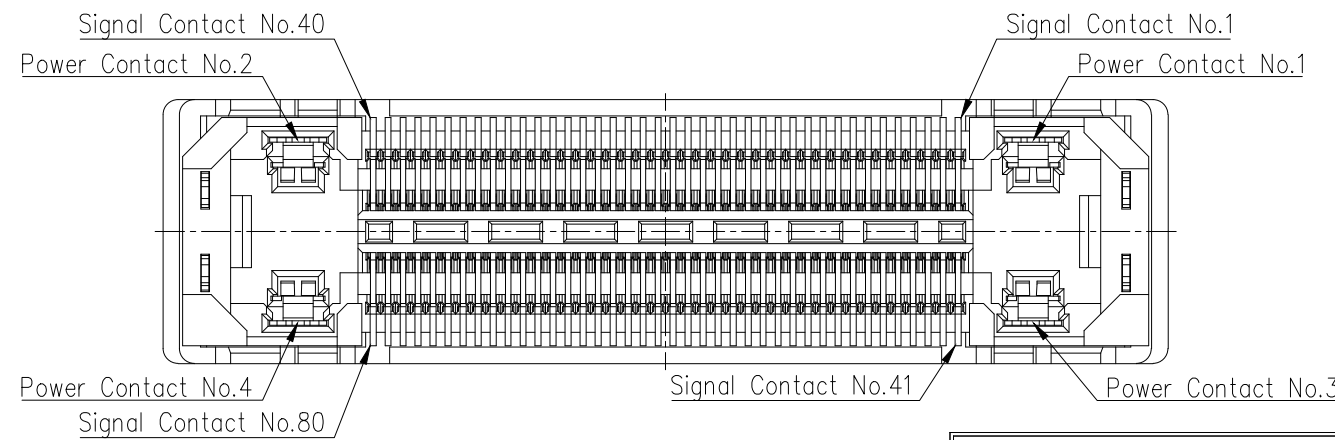
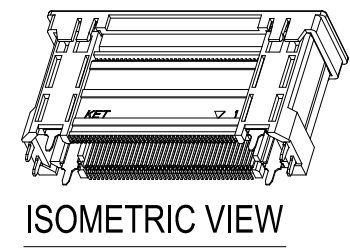


- NOTE -

1. TOLERANCE :  $\pm 0.0B10.2$ , ANGLE  $\pm 0.0B13^\circ$
2. COPLANARITY : 0.1 MAX.
3. MATING PARTS : MG 656915-5
4. Spec : ES91500-03
5. Solder : Reflow Solder Only(Surface mount)

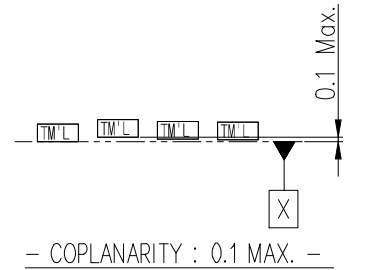

10 hazardous substances in parts (Lead, Mercury, Cadmium, Hexavalent Chromium, PBBs, PBDEs, DEHP, DBP, BBP, DIBP) shall not exceed the maximum permissible concentration prescribed under EU ELV Directive & RoHS Regulation."

5	RECEP 80P COVER	Polyamide	UL94-V0, BLACK	1
4	METAL FITTING	Copper Alloy	Ni + Sn	2
3	RECEP POWER TM'L H16.8	Copper Alloy	Ni + Au(Contact) + Sn(Lead)	4
2	RECEP SIGNAL TM'L H16.8	Copper Alloy	Ni + Au(Contact, Lead)	80
1	RECEP 80P HS'G H16.8	Polyamide	UL94-V0, BLACK	1
NO.	NAME	MATERIAL	FINISH	Q'TC
			MATERIAL	KET KOREA ELECTRIC TERMINAL CO., LTD.
			FINISH	
			WIRE RANGE	CLASS Board to Board
			INSULATION	TYPE FLOATING P=0.5mm
△	RELEASE	kuh pjm khc	19.02.21	
LTR	REVISION RECORD	DR. CHK. APP. DATE	TOLERANCE EXCEPT AS NOTED	SCALE 4:1
DR.	K.U.H 19.02.21	CHK. P.J.M 19.02.21	±0.2	PART NO. MG646084-5
CHK.		APP. K.H.C 19.02.21		PART NAME 0.5 FLOATING B TO B RECEPTACLE 80P ASS'Y H16.8 1/1

**APPROVED**  
2020-12-10  
KOREA ELECTRIC TERMINAL CO., LTD.  
Korea Electric Terminal Co., LTD.