


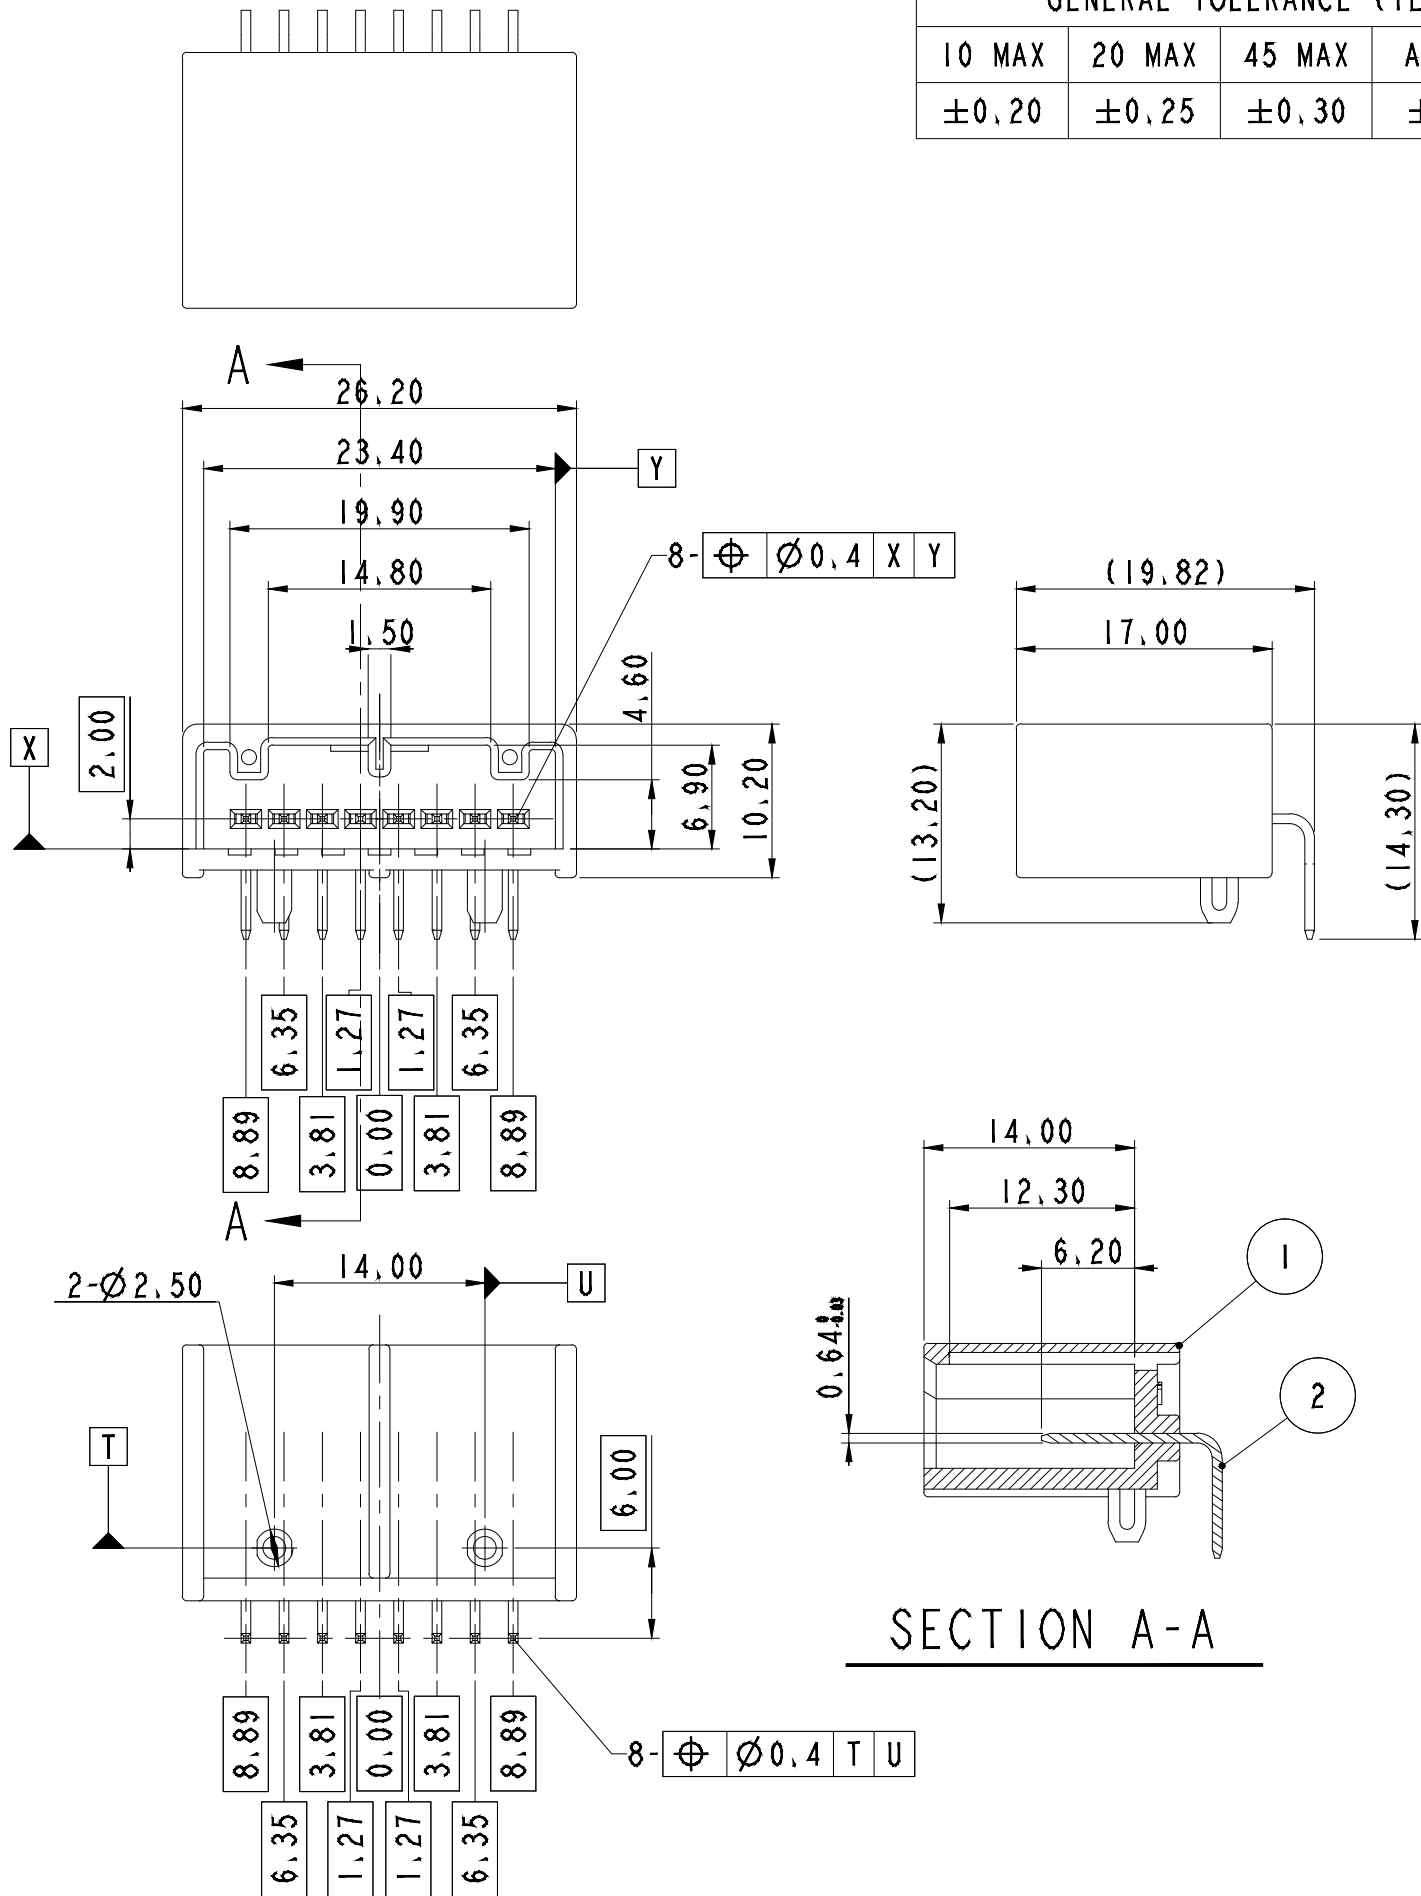

SECTION A-A



GENERAL TOLERANCE (TERMINAL)

10 MAX	20 MAX	45 MAX	ANGLE	ECCENT
±0.20	±0.25	±0.30	±30'	0.1

GENERAL TOLERANCE (HOUSING)

10 MAX	50 MAX	100 MAX	250 MAX	250 VR	ANGLE	ECCENT
±0.20	±0.30	±0.55	±0.95	±1.4	±30'	0.1

USED ON

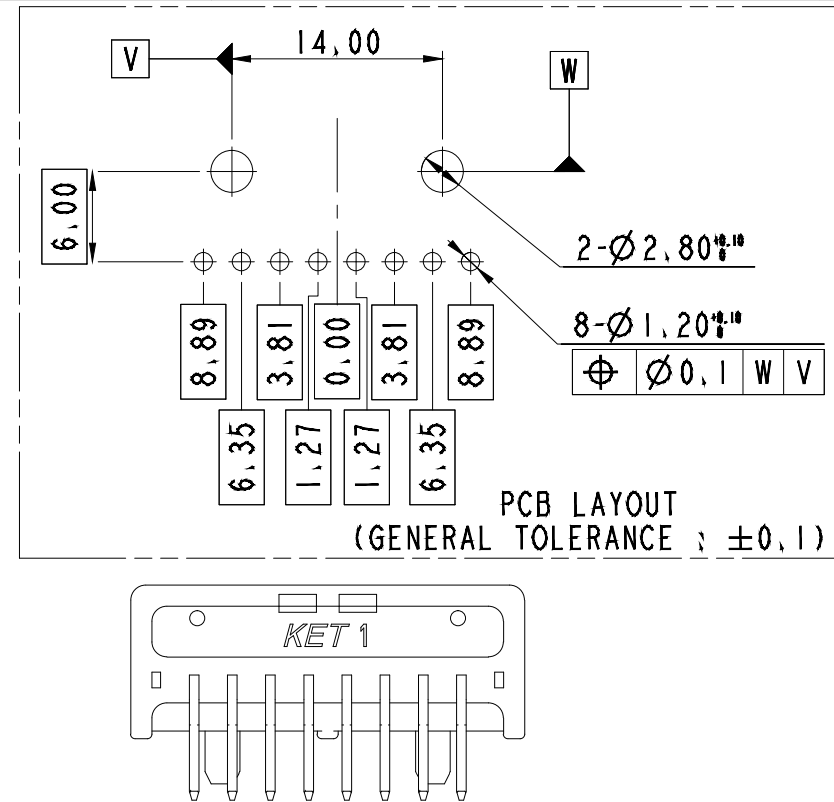

NO.	MATERIAL	COLOR
0	PBT-GF30	NATURAL
1		RED
2		BLUE
20		JADE
3		YELLOW
4		GRAY
40		DARK GRAY
41		LIGHT GRAY
5		BLACK
6		DARK GREEN
7		BROWN
8		LIGHT GREEN
9		MAGENTA
11		ORANGE

주 기

1. 기능상 유해한 BURR 및 WELDLINE 등이 없을 것.
2. 적용 FEMALE HOUSING : MG656924
3. TERMINAL 도금 사양 : TYPE A Sn(무광택), (MS915-01)
Ni 하지 도금 + Sn(무광) + Reflow
4. 제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

NOTE

1. MUST BE FREE OF BURR, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
2. APPLICABLE FEMALE HOUSING : MG656924
3. TERMINAL PLATING SPECIFICATION : TYPE A Sn(MATTE), (MS915-01)
Ni-PLATED UNDER + Sn(MATT) + Reflow
4. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY, CADMIUM, HEXAVALENT CHROMIUM, PBBs, PBDEs) SHOULD NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

APPROVED

2019-11-06

KOREA ELECTRIC
TERMINAL CO., LTD.
Korea Electric Te
rminal Co., LTD.

ISSUE MARK

NO.	PART NAME	PART NO	MATERIAL	FINISH	QTY
1	025 8M PCB HOUSING (HJT)	MG676876	SEE TABLE	SEE TABLE	1EA
2	025 PCB MALE TERMINAL (S)	ST792555-2	BRASS	Sn 후도금(무광)-Reflow	8EA

					MATERIAL	SEE TABLE		
					FINISH	SEE TABLE		
					WIRE RANGE		CLASS	025
					INSULATION		TYPE	HJT
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SCALE 2/1	PART NO. MG646091
CHK.	SSH 2017.01.23	APP.	BIN 2017.01.23			PART_NAME	025 8M PCB ASSY (HJT)	

KOREA ELECTRIC
TERMINAL CO., LTD.