


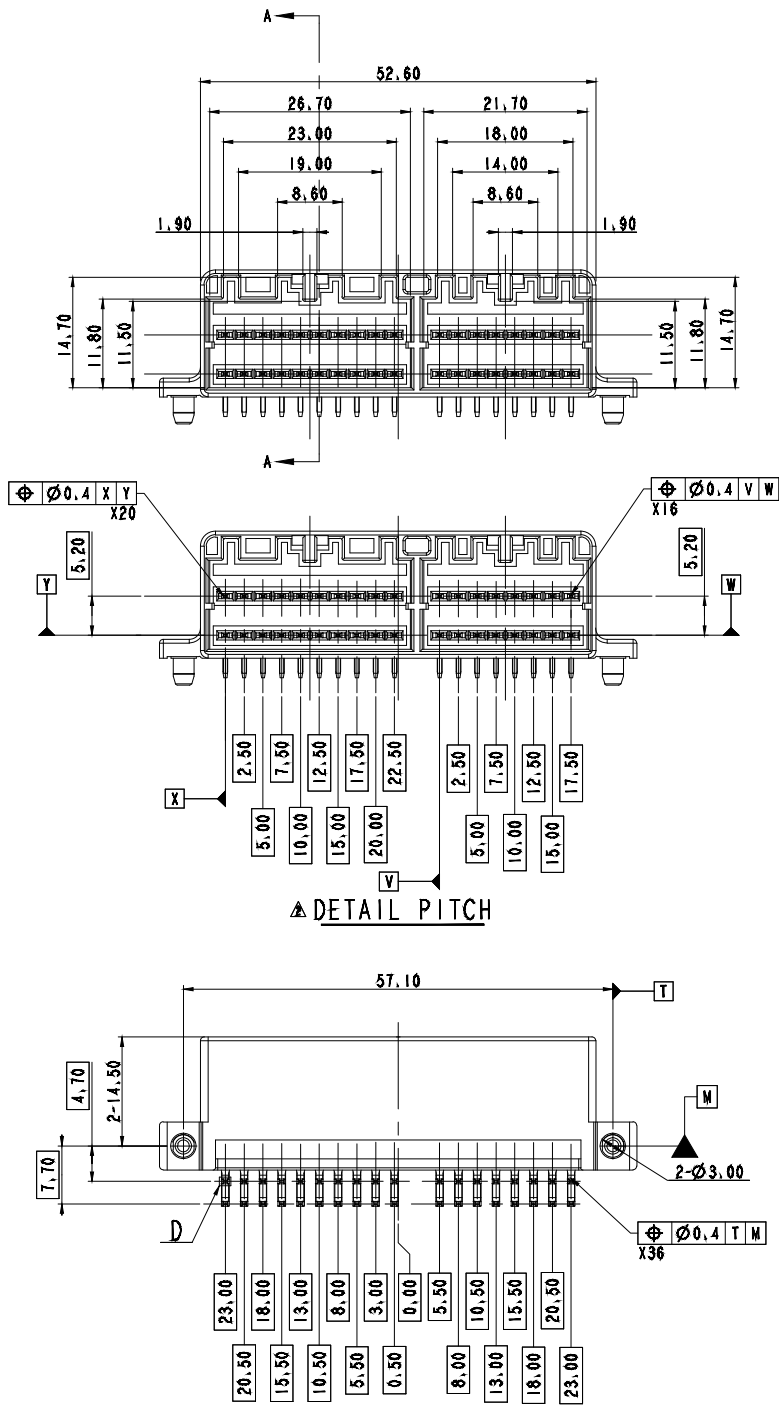
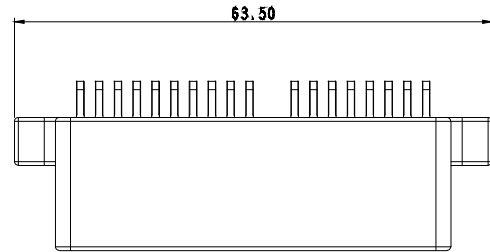



SECTION A-A



DETAIL D
SCALE 10/1

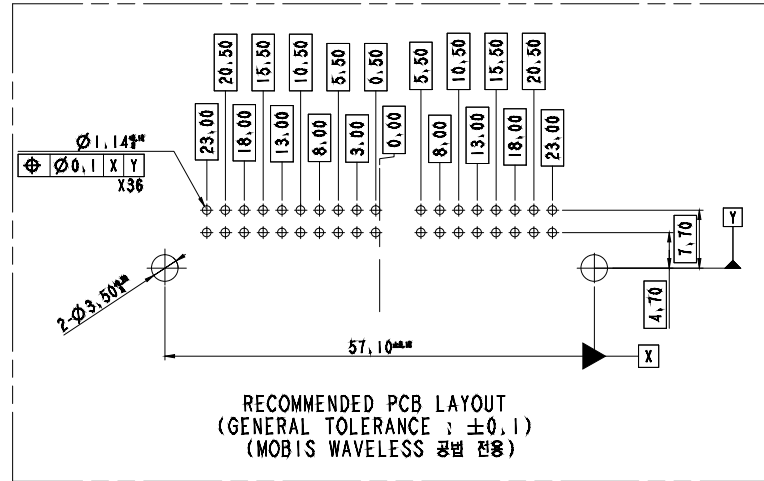

RECOMMENDED PCB LAYOUT
(GENERAL TOLERANCE : ±0.1)
(MOBIS WAVELESS 공법 전용)

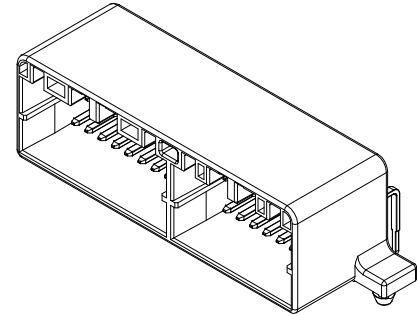

ISO VIEW

NO.	MATERIAL	COLOR
0	LCP-GF30	NATURAL
1		RED
2		BLUE
20		JADE
3		YELLOW
4		GRAY
40		DARK GRAY
41		LIGHT GRAY
5		BLACK
6		DARK GREEN
7		BROWN
8		LIGHT GREEN
9		MAGENTA
11		ORANGE

- 주요
1. 기능상 유해한 BURR 및 WELDLINE 등이 없을 것,
2. 적용 FEMALE CONNECTOR : MG614119(04011 20F ASSY)
3. TERMINAL 도금 사양 : TYPE A Sn(무광), (MS915-01)
4. 재료내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서
지정된 최대 허용 농도를 초과해서는 안된다,
NOTE
1. MUST BE FREE OF FLASH, WELDLINE
AND IMPERFECTION THAT AFFECT FUNCTION,
2. APPLICABLE FEMALE CONNECTOR : MG614119(04011 20F ASSY)
3. TERMINAL PLATING SPECIFICATION : TYPE A Sn(MATTE), (MS915-01)
4. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD,MERCURY,
CADMIUM,HEXAVALENT CHROMIUM,PBBs,PBDEs) SHALL
NOT EXCEED THE MAXIMUM PERMISSIBLE
CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE
& RoHS REGULATION,

APPROVED

2019-11-06

KOREA ELECTRIC
TERMINAL CO., LTD.
Korea Electric Te
rminal Co., LTD.

NO.	ASSY NO.	NO.	PART NAME	PART NO.	MATERIAL	FINISH	Q'TY
1	MG646099	1	04011 PCB 36M HOUSING (H2T)	MG676882	SEE TABLE	NATURAL	1EA
2		2	04011 PCB MALE TM'L(L) △	ST793461-2	BRASS	SH RESIN (Ref10)	18EA
3		3	04011 PCB MALE TM'L(S) △	ST793462-2	BRASS	SH RESIN (Ref10)	18EA

NO.	ASSY NO.	NO.	PART NAME	PART NO.	MATERIAL	FINISH	Q'TY
1	MG646099	1	04011 PCB 36M HOUSING (H2T)	MG676882	SEE TABLE	NATURAL	1EA
2		2	04011 PCB MALE TM'L(L) △	ST793461-2	BRASS	SH RESIN (Ref10)	18EA
3		3	04011 PCB MALE TM'L(S) △	ST793462-2	BRASS	SH RESIN (Ref10)	18EA