
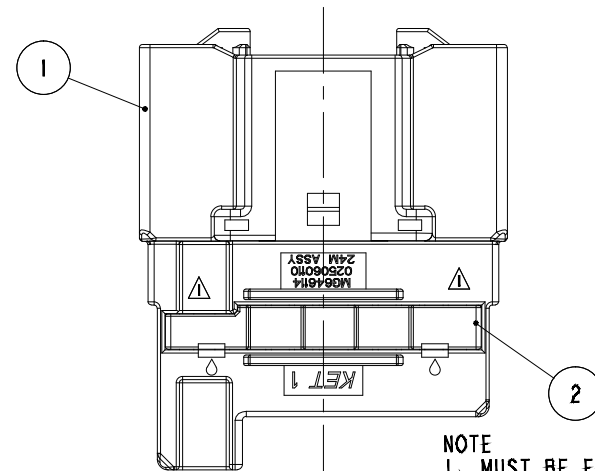
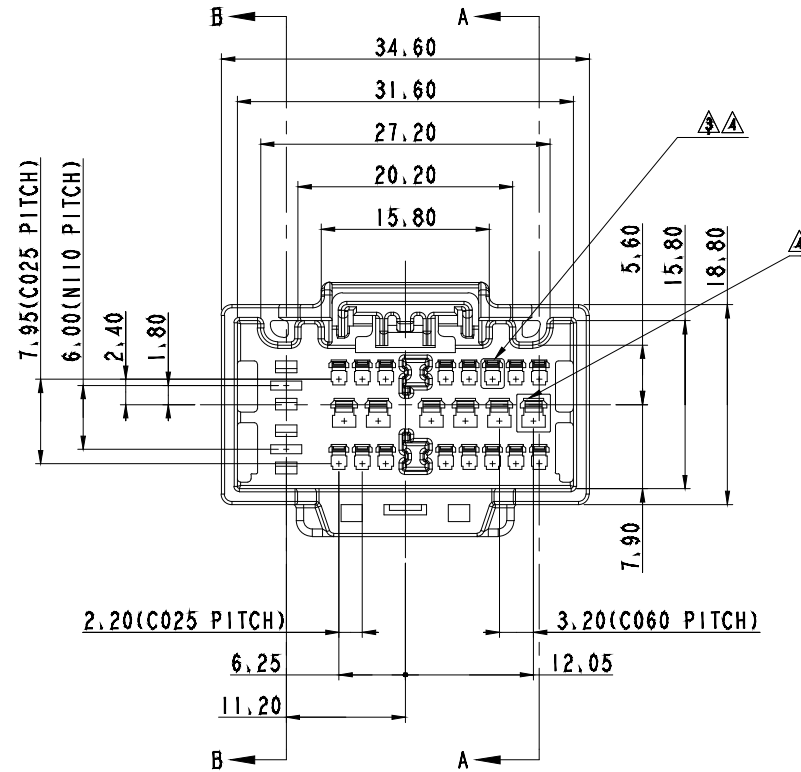
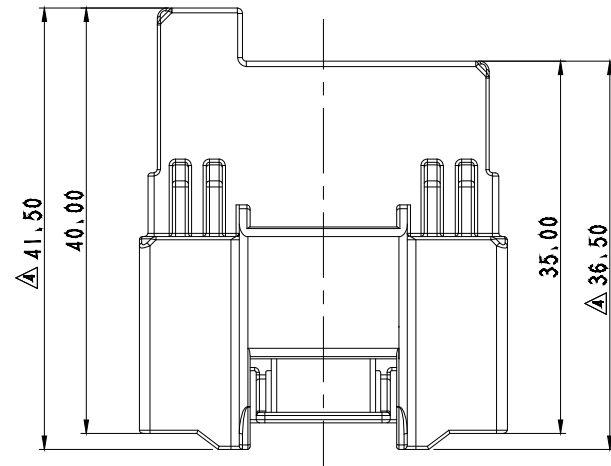



ISO VIEW

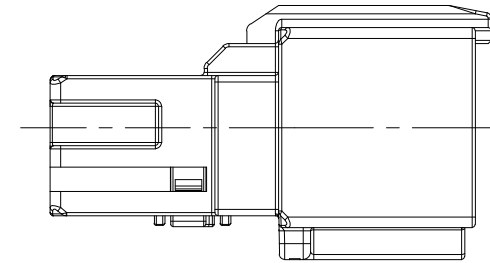


NOTE

- MUST BE FREE OF BURR, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
- APPLICABLE TERMINAL(C025) : ST741360-3, ST741361-3
APPLICABLE TERMINAL(C060) : ST741362-3, ST741363-3, ST741364-3
APPLICABLE TERMINAL(N110) : ST741404-3, ST741367-3, ST741368-3, ST741369-3
- APPLICABLE CLIP : MG631267, MG631929, MG633815, MG634834, MG633862, MG633870, MG635682, MG635682, MG663492
- APPLICABLE CONNECTOR : MG656948
- () 치수는 참고치수임.
- 제품내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.



GENERAL TOLERANCE (HOUSING)										USED ON
10 MAX	30 MAX	50 MAX	70 MAX	100 MAX	120 MAX	250 MAX	250 VR	ANGLE	ECCENT	
±0.15	±0.2	±0.3	±0.4	±0.5	±0.75	±0.9	±1.4	±30'	0.1	

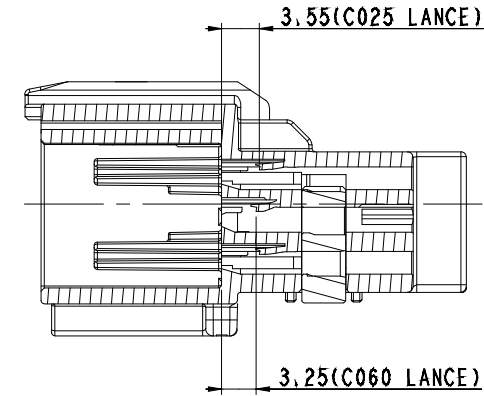

SECTION A-A

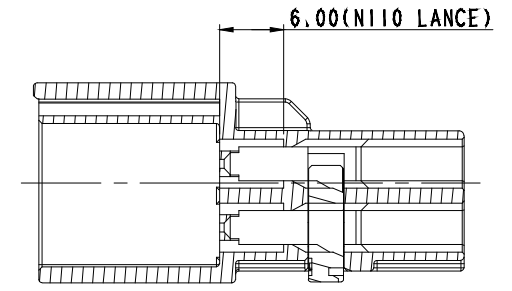

SECTION B-B

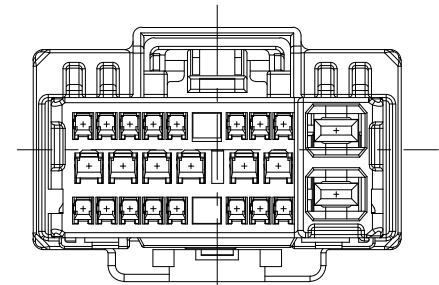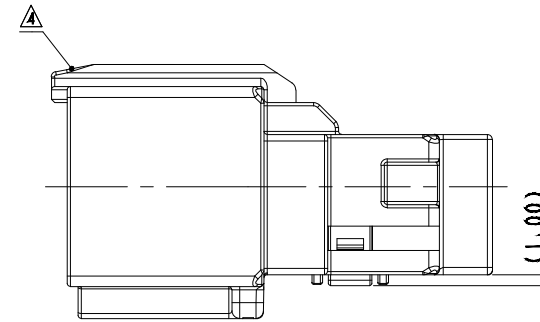

APPROVED

2019-11-06

**KOREA ELECTRIC
TERMINAL CO., LTD.
Korea Electric Te
rminal Co., LTD.**

NO.	MATERIAL	COLOR
* 0	PBT	NATURAL
1		RED
* 2		BLUE
20		JADE
3		YELLOW
4		GRAY
40		DARK GRAY
41		LIGHT GRAY
5		BLACK
6		DARK GREEN
7		BROWN
8	LIGHT GREEN	
9	MAGENTA	
11	ORANGE	

NO	PART NO.	PART NAME	MATERIAL	FINISH	Q'TY
1	MG676947	C025C060N110 24M HOUSING	SEE TABLE	SEE TABLE	1
2	MG676948-3	C025C060N110 24M SPACER	PBT	YELLOW	1

LTR	REVISION RECORD	DR.	CHK.	APP.	DATE	MATERIAL	FINISH	WIRE RANGE	INSULATION	SCALE	PART NO.	ISSUE MARK
DR, CYK	2017.05.26	CHK,				SEE TABLE	SEE TABLE	-	-	2/1	MG646114	KET KOREA ELECTRIC TERMINAL CO., LTD. CLASS C025/C060/N110 TYPE 비병수
CHK, CK1	2017.05.26	APP, LJE			2017.05.26	SEE TABLE	SEE TABLE	-	-	2/1	MG646114	