

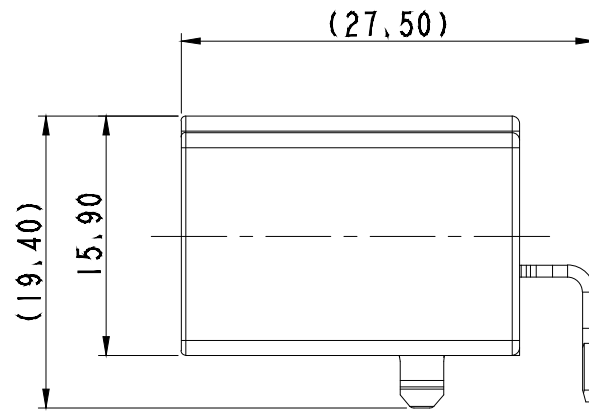
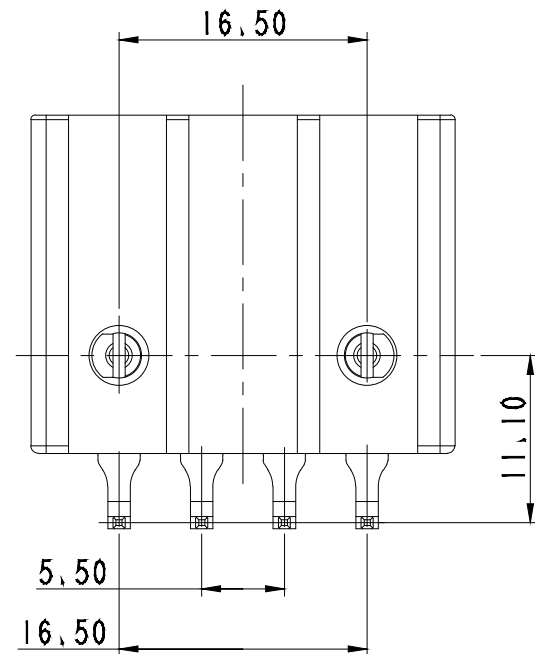
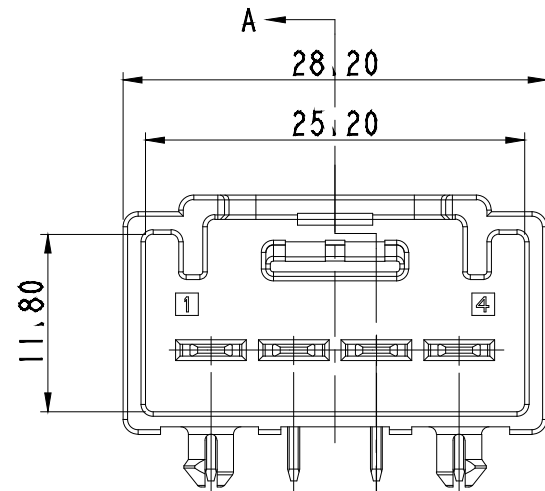
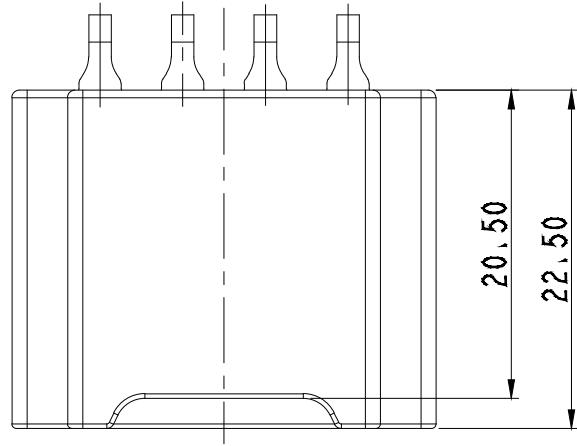
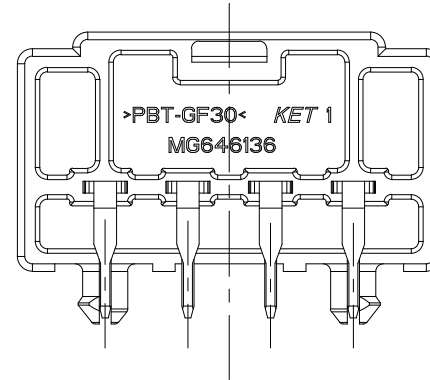


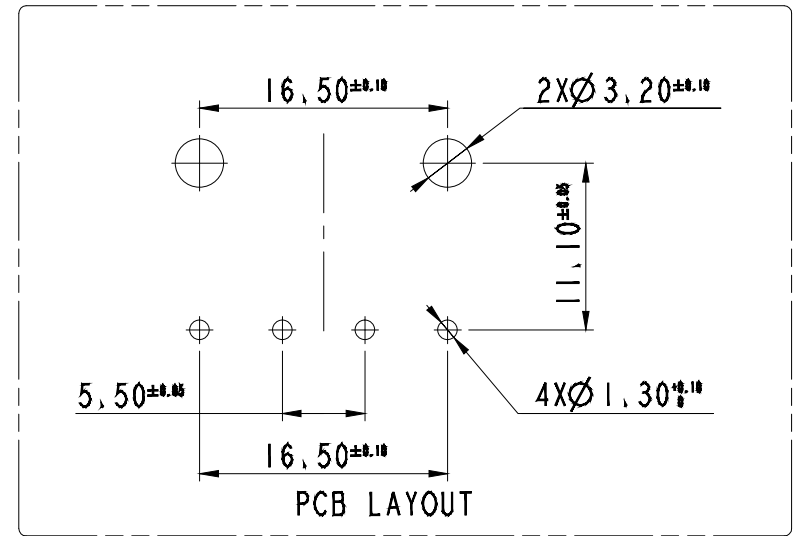


GENERAL TOLERANCE (TERMINAL)					GENERAL TOLERANCE (HOUSING)						USED ON
10 MAX	20 MAX	45 MAX	ANGLE	ECCENT	10 MAX	50 MAX	100 MAX	250 VR	ANGLE	ECCENT	
±0.2	±0.25	±0.30	±30'	0.1	±0.2	±0.3	±0.95	±1.4	±30'	0.1	

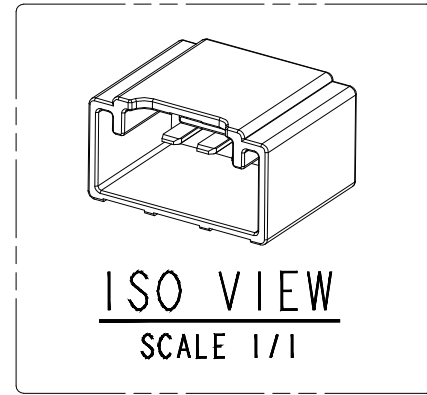

- 주 기
- 적용 FEMALE CONNECTOR ; MG655778-11(A-TYPE)
 - TIN 도금사양 ; TYPE A Sn(무광), MS915-01
Ni 하지 도금 + Sn(무광) + Reflow
 - 제품내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가 크롬, PBB, PBDE)의 함유 농도를 초과하지 아니하며, EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과하지 아니한다.

- NOTES
- APPLICABLE FEMALE CONNECTOR ; MG655778-11(A-TYPE)
 - TIN PLATING SPECIFICATION ; TYPE A Sn(MATT), MS915-01
Ni - PLATED UNDER + Sn(MATT) + Reflow
 - 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY, CADMIUM, HEXAVALENT CHROMIUM, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

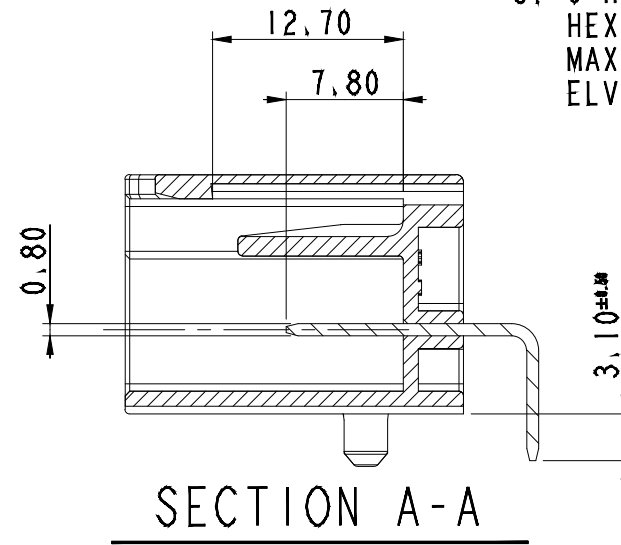

NO.	MATERIAL	COLOR
0	SEE TABLE	NATURAL
1		RED
2		BLUE
20		JADE
3		YELLOW
4		GRAY
40		DARK GRAY
41		LIGHT GRAY
* 5		BLACK
6		DARK GREEN
7		BROWN
8		LIGHT GREEN
9		MAGENTA
11		ORANGE

NO	PART NAME	PART NO	MATERIAL	FINISH
1	110 4M PCB HOUSING (H2T)	MG677009	PBT-GF30	BLACK
2	110 PCB TERMINAL	ST793524	BRASS	Sn(무광) 도금 (REFLOW)

					MATERIAL	SEE TABLE	 KOREA ELECTRIC TERMINAL CO., LTD.				
					FINISH	SEE TABLE					
					WIRE RANGE	-		CLASS	-		
					INSULATION	-		TYPE	110		
LTR	REVISION RECORD		DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SEE TABLE	SCALE 2/1	PART NO.	MG646136
DR. KCS '17.09.07			CHK. YSW '17.09.08			PART_NAME					
CHK.			APP. SSH '17.09.11			110 4M PCB ASSY (H2T)					



ISSUE MARK