
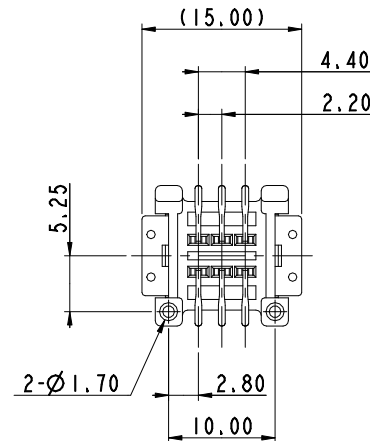
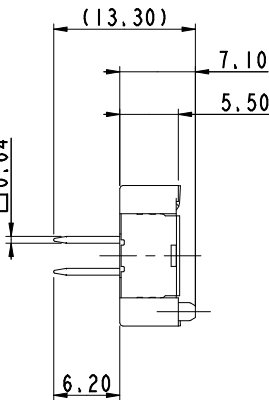
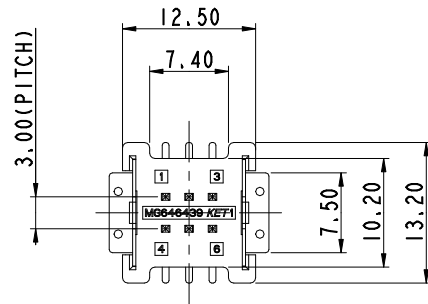


ISO VIEW

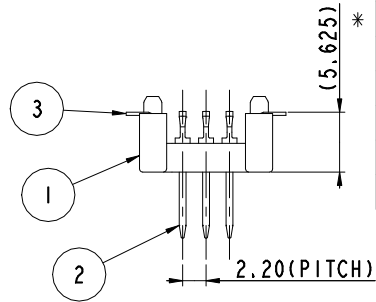

GENERAL TOLERANCE (TERMINAL)


10 MAX	20 MAX	45 MAX	ANGLE	ECCENT
±0.2	±0.25	±0.3	±30'	0.1

GENERAL TOLERANCE (HOUSING)

10 MAX	50 MAX	100 MAX	250 MAX	250 VR	ANGLE	ECCENT
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1

USED ON

NO.	MATERIAL	COLOR
0	PPS-GF40	NATURAL
1		RED
2		BLUE
20		JADE
3		YELLOW
4		GRAY
40		DARK GRAY
41		LIGHT GRAY
5		BLACK
6		DARK GREEN
7		BROWN
8		LIGHT GREEN
9		MAGENTA
11		ORANGE

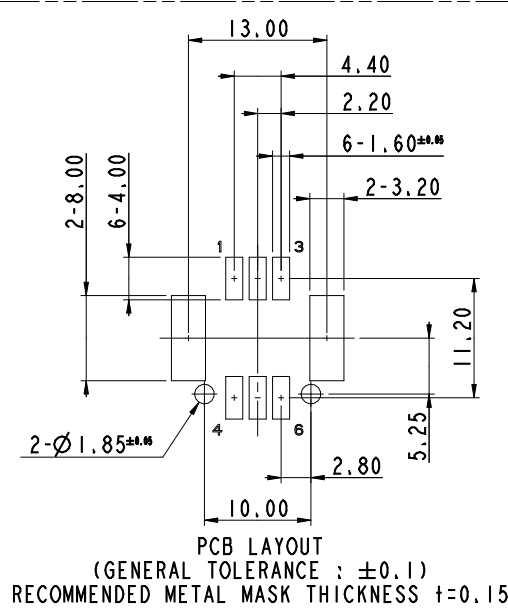

주거

1. 기능상 유해한 BURR 및 WELDLINE 등이 없을 것
2. 적용 FEMALE HOUSING : MG657193
3. 단자 주석 도금 - TYPE A Sn(무광), (MS915-01)
Ni 하지 도금 + Sn(무광) + Reflow
4. 포장 사양 : EMBOSS TAPE REEL
5. 무연 솔더 적용 가능
6. 부품 2번과 3번의 평탄도는 Max 0.15mm
7. 제품내 함유된 10대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs,DHEP,DBP,BBP,DIBP)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

NOTE

1. MUST BE FREE OF FLASH, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION
2. APPLICABLE FEMALE HOUSING: MG657193
3. TIN-PLATED TERMINAL - TYPE A Sn(MATT), (MS915-01)
Ni-PLATED UNDER + Sn(MATT) + Reflow
4. PACKAGING TYPE : EMBOSS TAPE REEL
5. AVAILABLE FOR PB FREE SOLDER
6. PIN FLATNESS BETWEEN OF PART 2, 3 IS MAX 0.15mm.
7. 10 HAZARDOUS SUBSTANCES IN PARTS (LEAD,MERCURY, CADMIUM,HEXAVALENT CHROMIUM,PBBs,PBDEs,DEHP, DBP,BBP,DIBP) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

ISSUE MARK

NO	PART NAME	PART NO	MATERIAL	FINISH	QTY
1	025 6M SMD PINBLOCK	MG677764-5	SEE TABLE	SEE TABLE	1
2	025 SMD MALE TERMINAL(S)	ST792609-2	BRASS	Sn 후도금(무광)-Reflow	6
3	SIDE BRACKET	ST792586-2	BRASS	Sn 후도금(무광)	2

						MATERIAL	SEE TABLE		KOREA ELECTRIC TERMINAL CO., LTD.		
						FINISH	SEE TABLE				
						WIRE RANGE	-			CLASS	025
						INSULATION	-			TYPE	SMD
LTR	REVISION RECORD		DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SEE TABLE	SCALE 2/1	PART NO.	MG646439-5
DR. JH.K 20.06.16			CHK.								
CHK. YSW 20.06.17			APP. SSH 20.06.17			PART-NAME 025 6M SMD PINBLOCK ASSY					