


SECTION A-A

GENERAL TOLERANCE (TERMINAL)					GENERAL TOLERANCE (HOUSING)							USED ON
10 MAX	20 MAX	45 MAX	ANGLE	ECCENT	10 MAX	50 MAX	100 MAX	250 MAX	250 VR	ANGLE	ECCENT	
±0.2	±0.25	±0.3	±30'	0.1	±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	

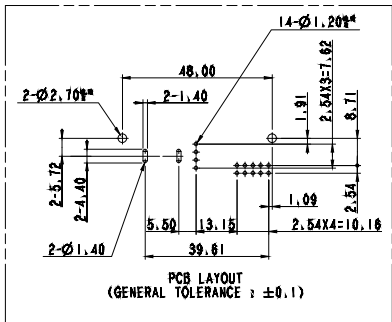

NO.	MATERIAL	COLOR
0	PBT-GF30	NATURAL
1		RED
2		BLUE
20		JADE
3		YELLOW
40		GRAY
41		LIGHT GRAY
42		DARK GRAY
5		BLACK
6		DARK GREEN
7		BROWN
8		LIGHT GREEN
9	MAGENTA	
11	ORANGE	

주기
1, 기능상 우측면 BURR 및 WELDLINE 등에 없을 것.
2, 박음 FEMALE HOUSING : MG657120-5, MG655723-5
3, TERMINAL 도금 종류 : TYPE A Sn(무광), (MS915-01)
Ni 하지 도금 + Sn(무광)
4, 제품내 함유된 10대 유해물질 (납, 수은, 카드뮴, 6가크롬, PBBs, PBDEs, DHEP, DBP, BBP, DIBP) 는 EU ELV 지침 및 RoHS 법규에서 정해진 최대 농도 이상 초과해서는 안된다.

NOTE

1. MUST BE FREE OF BURR, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
2. APPLICABLE FEDERAL SPECIFICATIONS: MS65120-5, MS655723-5
3. TERMINAL PLATING SPECIFICATION: TYPE A, S6(MATTE), (WS910-01) NI-PLATED UNDER S-6(MATTE)
4. NO HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY, CADMIUM, HEXAVALENT CHROMIUM, PBBs, PBDE, DEHP, DBP, PBB, DBP) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE
CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION

NO.	PART NAME	PART NO	MATERIAL	FINISH	QTY
1	025250 16W PCB HOUSING(VRT)	M6677840-5	SEE TABLE	SEE TABLE	1EA
2	025 PCB MALE TERMINAL (L)	ST793655-2	BRASS	Sn 亜鉛鍍(平鍍)	10EA
3	025 PCB MALE TERMINAL (S)	ST793653-2	BRASS		4EA
4	250 PCB MALE TERMINAL	ST793651-2	BRASS		2EA

						MATERIAL	SEE TABLE	 KET KOREA ELECTRIC TERMINAL CO., LTD.		
						FINISH	SEE TABLE			
						WIRE GAUGE	-		CLASS	025250
						INSULATION	-		TYPE	PCB
LTR	REVISION HISTORY	REV.	APP.	DATE	REV.	SEE TABLE	SCALE	PART NO.	M064561-1-5	
	REV. 001 00.00.00	CHK.					1/1			
	CHK. 100 00.00.00	APP.	SS01 00.00.00			PART NAME	025250	10M PCB ASSY(VR1)		

APPROVED

2021-04-02

**KOREA ELECTRIC
TERMINAL CO., LTD.**

**Korea Electric Te
rminat Co., LTD.**

ISSUE MARK

KOREA ELECTRIC

TERMINAL CO., L

025250

PCB

MG646461-6

ASSY(VRT)
