







GENERAL TOLERANCE (HOUSING)					USED ON
10MAX	20MAX	45MAX	ANGLE	ECCENT	
±0.2	±0.25	±0.3	±30'	0.1	

주 기

- 제품 기능상 유해한 FLASH 및 SINK , 변형 등이 없을 것.
- 적용 TERMINAL : ST730675, ST730676, ST730677
- 적용 HOUSING : MG641235
- SPACER는 본 도면과 같이 1차 LOCK'G 상태로 유지, 공급할 것.
- 제품내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가 크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

NOTE

- MUST BE FREE OF FLASH, SINK AND IMPERFECTION THAT AFFECT FUNCTION.
- APPLICABLE TERMINAL : ST730675, ST730676, ST730677
- APPLICABLE HOUSING : MG641235
- SPACER MUST BE KEEP AND SUPPLY FIRST LOCKING CONDITION AS THIS DRAWING
- 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MECURY, CADMIUM, HEXAVALENT CHROMIUM, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

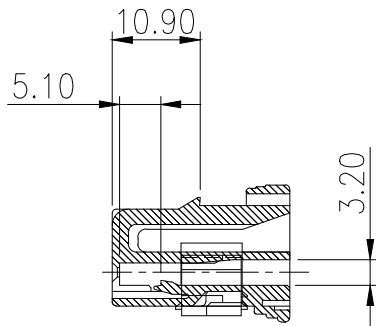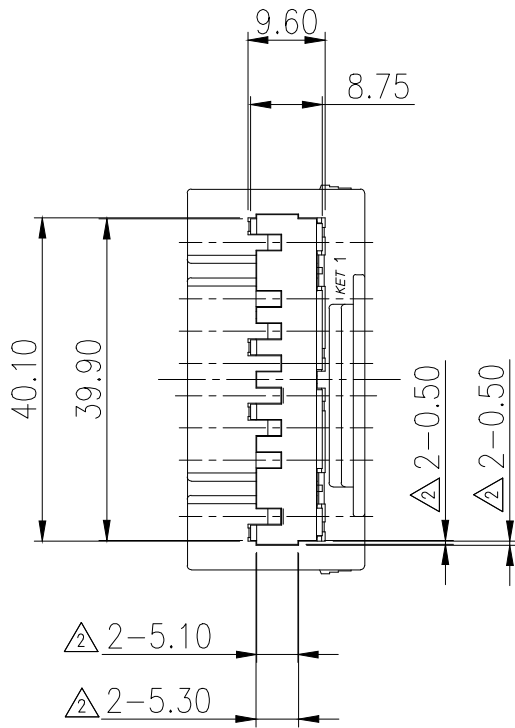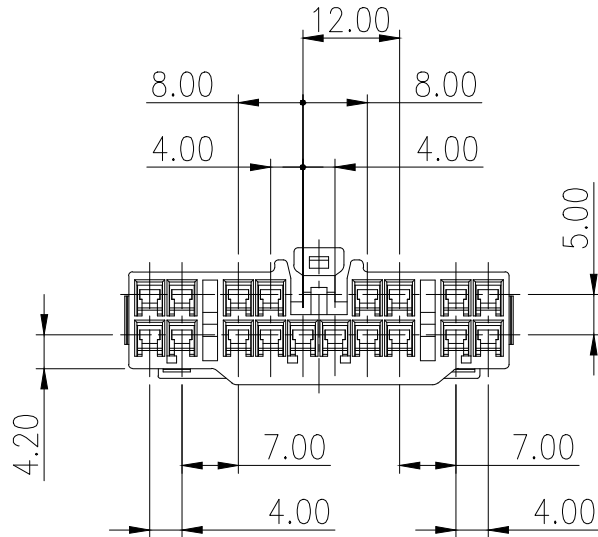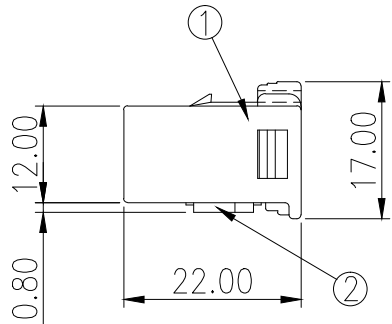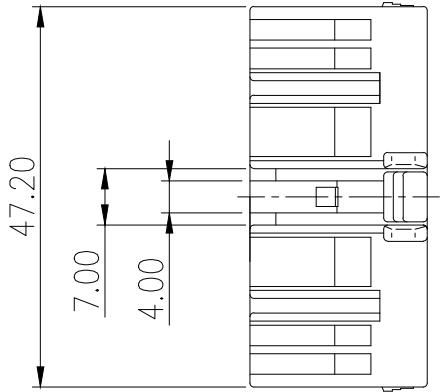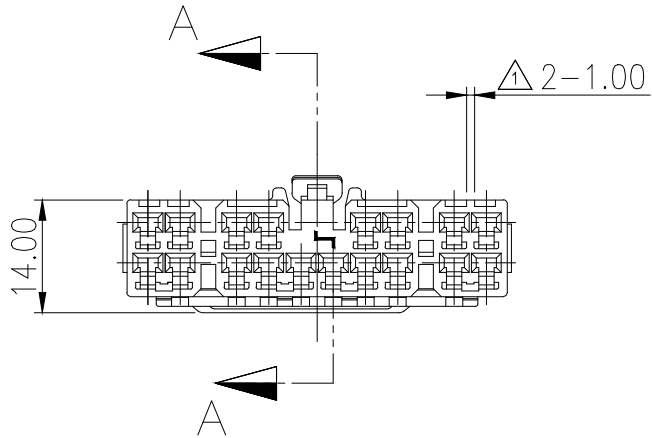

SECT' A-A

NO.	MATERIAL	COLOR
* 0	P B T	NATURAL
1		RED
* 2		BLUE
20		JADE
* 3		YELLOW
4		GRAY
40		DARK GRAY
41		LIGHT GRAY
* 5		BLACK
6		DARK GREEN
7		BROWN
8		LIGHT GREEN
9		MAGENTA
11		ORANGE

NO	PART NO	PART NAME	MATERIAL	FINISH
①	MG671072	090 II 18F HS'G	SEE TABLE	SEE TABLE
②	MG671073	090 II 18F HS'G SPACER	PBT	NATURAL

					MATERIAL SEE TABLE		 KOREA ELECTRIC TERMINAL CO., LTD.
					FINISH SEE TABLE		
③	ECO-2009-260 근거 도면 재작성	SDI KSC	CJH	'20.09.16	WIRE RANGE		CLASS .090 II
②	시방변경(S040217)근거 도면 재작성	KDJ KKJ	KCH	'04.12.15	INSULATION		TYPE
①	시방변경 010137의거 RIB두곳 추가	LSY KKJ	JJH	'01.08.06	TOLERANCE EXCEPT AS NOTED SEE TABLE		SCALE 1/1
LTR	REVISION RECORD	DR. CHK.	APP.	DATE	PART NO.		MG651074
DR. JANG 98.03.24		CHK. KKJ		3/24	PART NAME .090 II 18P PLUG ASS'Y		
CHK. JJH 3/25		APP. Watanabe		3/25			

APPROVED

2021-01-07

KOREA ELECTRIC
TERMINAL CO., LTD.
Korea Electric Te
rminal Co., LTD.

ISSUE MARK