


NO	P / NO	P / NAME	MATERIAL	FINISH
1	MG671084	△.090II 22F HS'G	PBT	NATURAL
2	MG671085	△.090II 22F SPACER	PBT	NATURAL

GENERAL TOLERANCE (HOUSING)							USED ON
10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT	
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	

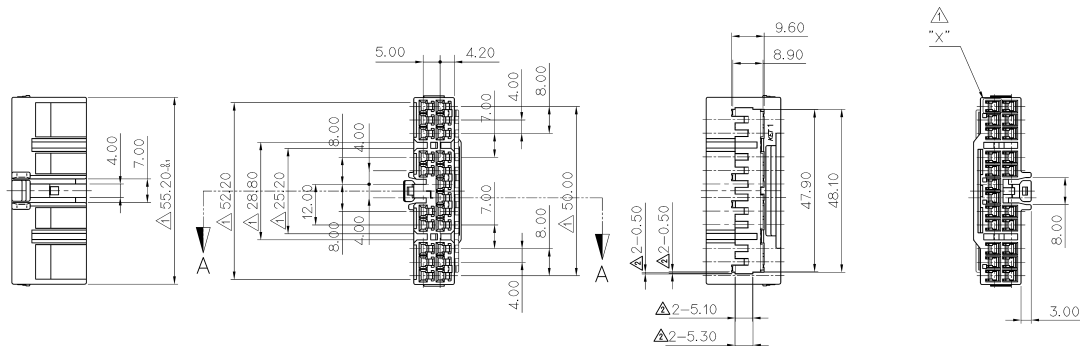

△ DETAIL "X" (5/1)

SECT' A-A

NOTE

- 제품기능상 유해한 BURR,변형 및 WELDLINE등이 없을것.
- 적용 TERMINAL: ST730675,676,677
- 적용 HS'G : MG641089
- SPACER는 본 도면과 같이 1차 LOCK'G 상태에서 유지, 공급할 것.



ISSUE MARK

				MATERIAL		SEE TABLE	KET (ENGINEERED)	KOREA ELECTRIC TERMINAL CO., LTD.
				FINISH		SEE TABLE		
△	설계시행면담(S060195) 근거 도면 제작명	DEM	날	06.07.12	WIRE RANGE		CLASS	.090 II
△	시험면담(S040219) 근거 도면 제작명	KDJ	날	04.12.15				
△	고객 요청에 의한 치수 추가	SJK	날	00.11.09	INSULATION		TYPE	
LTR	REVISION RECORD	DR	CHK	APP.				
DR.	JANG 98.09.23	CHK.	날	09.23	PART NAME		1/1	MG651086
CHK.	98.09.23	APP.	날	09.23				
PART NAME							△.090II 22F HS'G ASS'Y	