





GENERAL TOLERANCE (HOUSING)					USED ON
10MAX	20MAX	45MAX	ANGLE	ECCENT	
±0.20	±0.25	±0.30	±30'	0.10	

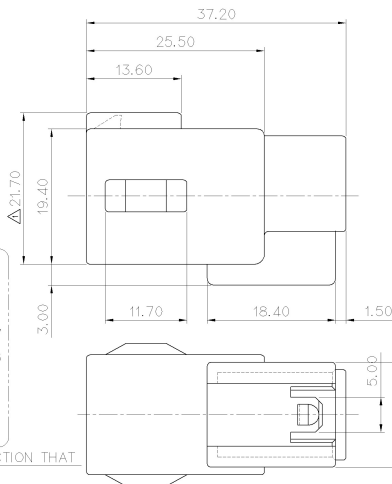


SECTION A-A

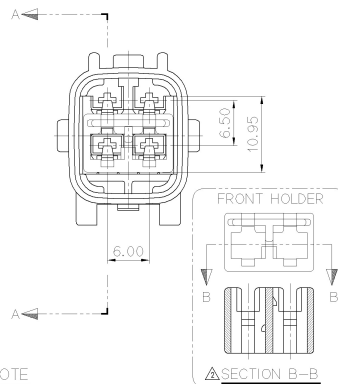

주 기

1. 제품기능상 유해한 BURR, 변형 및 WELDLINE 등이 없을 것.
2. 적용 TERMINAL: ST740686, 687, 688
3. 적용 HOUSING: MG641101
4. SPACER는 본 도면과 같이 1차 LOCK'G 상태로 유지, 공급할 것.
5. 제품내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.



NO.	MATERIAL	COLOR
0	P B T:	NATURAL
1		RED
2		BLUE
20		JADE
3		YELLOW
4		GRAY
40		DARK GRAY
41		LIGHT GRAY
5		BLACK
6		DARK GREEN
7		BROWN
8		LIGHT GREEN
9		MAGENTA
11		ORANGE

NOTE

1. MUST BE FREE OF FLASH, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
2. APPLICABLE TERMINAL : ST740686, 687, 688
3. APPLICABLE HOUSING : MG641101
4. F/HOLDER & TRIPLE LOCK MUST BE KEEP AND SUPPLY FOR FIRST LOCKING CONDITION AS THIS DRAWING.
5. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY, CADMIUM, HEXAVALENT CHROMIUM, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

NO.	PART NO.	PART NAME	MATERIAL	FINISH
1	MG671096	090 II WP 4P PLUG HOUSING	SEE TABLE	BLACK
2	MG671097	090 II WP 4P PLUG FRONT HOLDER	SEE TABLE	NATURAL

ISSUE MARK

					MATERIAL	SEE TABLE	KIET [ENGINEERED]	KOREA ELECTRIC TERMINAL CO., LTD.
					FINISH	SEE TABLE		
△	설계사양명(ISO60246)과 도면 제작성	WIRE		08.10.06				
△	설계사양명(ISO60227)과 도면 제작성	WIRE	08.09.09		WIRE RANGE		CLASS	090 II SEALED
△	봉합용 개선을 위한 제작성	WIRE	1998.7.13		INSULATION		TYPE	7282-7040
LTR	REVISION RECORD	DR	CHK	APP.	DATE	TOLERANCE REWORK AS METHOD	SCALE	PART NO.
	DR. WON. '97.03.07		CHK			SEE TABLE	2/1	MG651098
CHK.		APP.			PART NAME	090 II WP 4P PLUG ASSY		

DR.	WON.	'97.03.07	CHK.		7/13
CHK.		7/14	APP.		7/14