
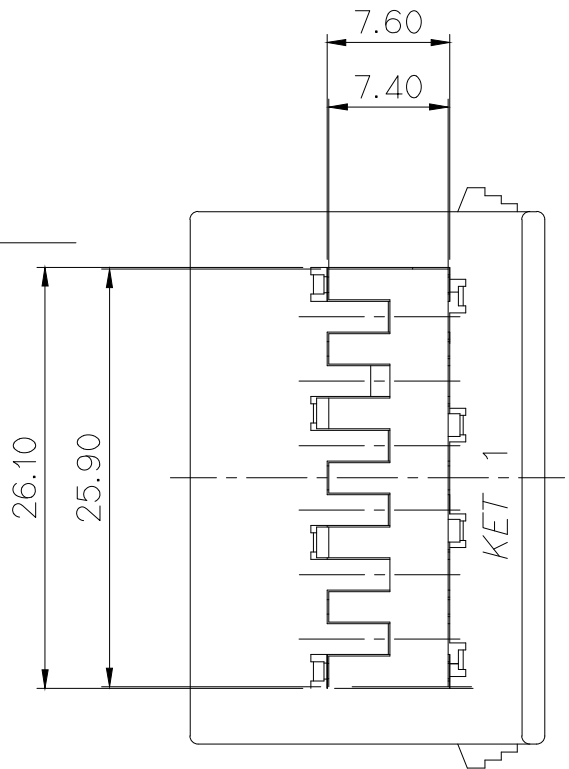
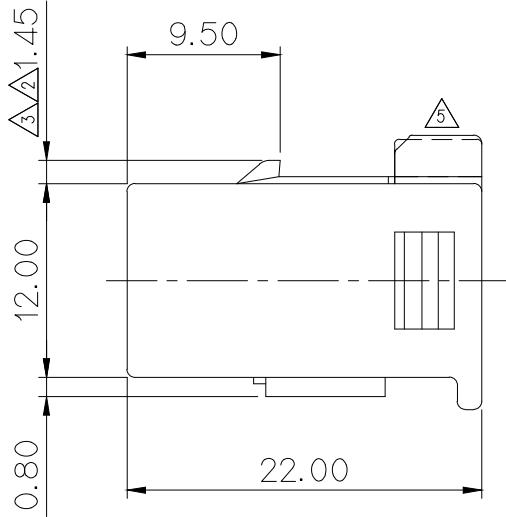
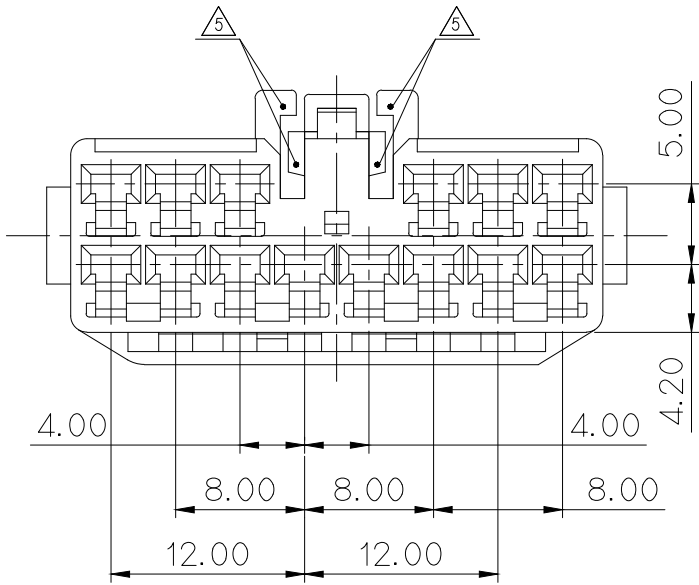



NO.	METERIAL	COLOR
* 0	P B T	NATURAL
* 1		RED
* 2		BLUE
* 3		YELLOW
* 4		GRAY
* 5		BLACK
6		W/GREEN
7		BROWN
8		GREEN

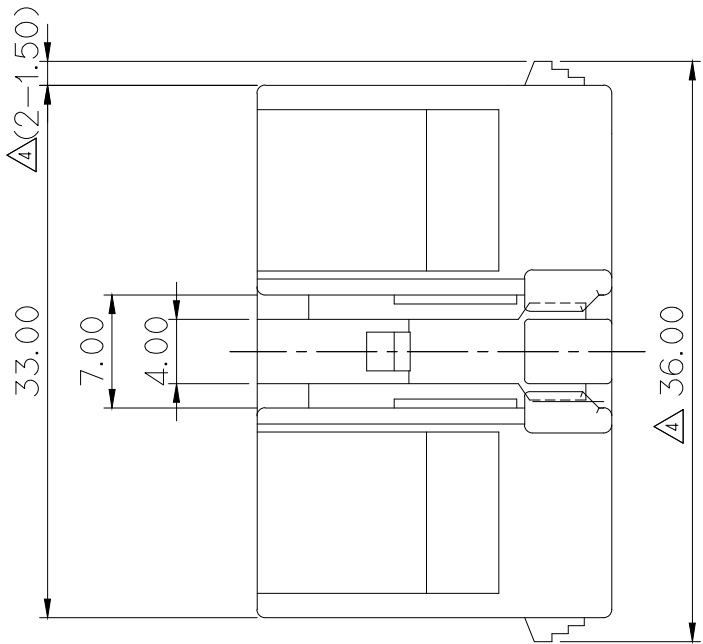

- NOTE
- MUST BE FREE OF BURR, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
 - APPLICABLE TERMINAL: ST730675, 676, 677
 - APPLICABLE HOUSING: MG641113
 - SPACER MUST BE KEEP AND SUPPLY
 - FIRST LOCKING CONDITION AS THIS DRAWING
 - 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY, CADMIUM, HEXAVALENT CHROMIUM, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE.

GENERAL TOLERANCE (HOUSING)							USED ON
1MAX	5MAX	10MAX	20MAX	45MAX	ANGLE	ECCENT	
±0.10	±0.15	±0.20	±0.25	±0.30	±30'	0.10	

NO.	PART NO.	PART NAME	METERIAL	FINISH
1	MG671108	090 II 14F HS'G	SEE TABLE	NATURAL
2	MG671109	090 II 14F SPACER		NATURAL

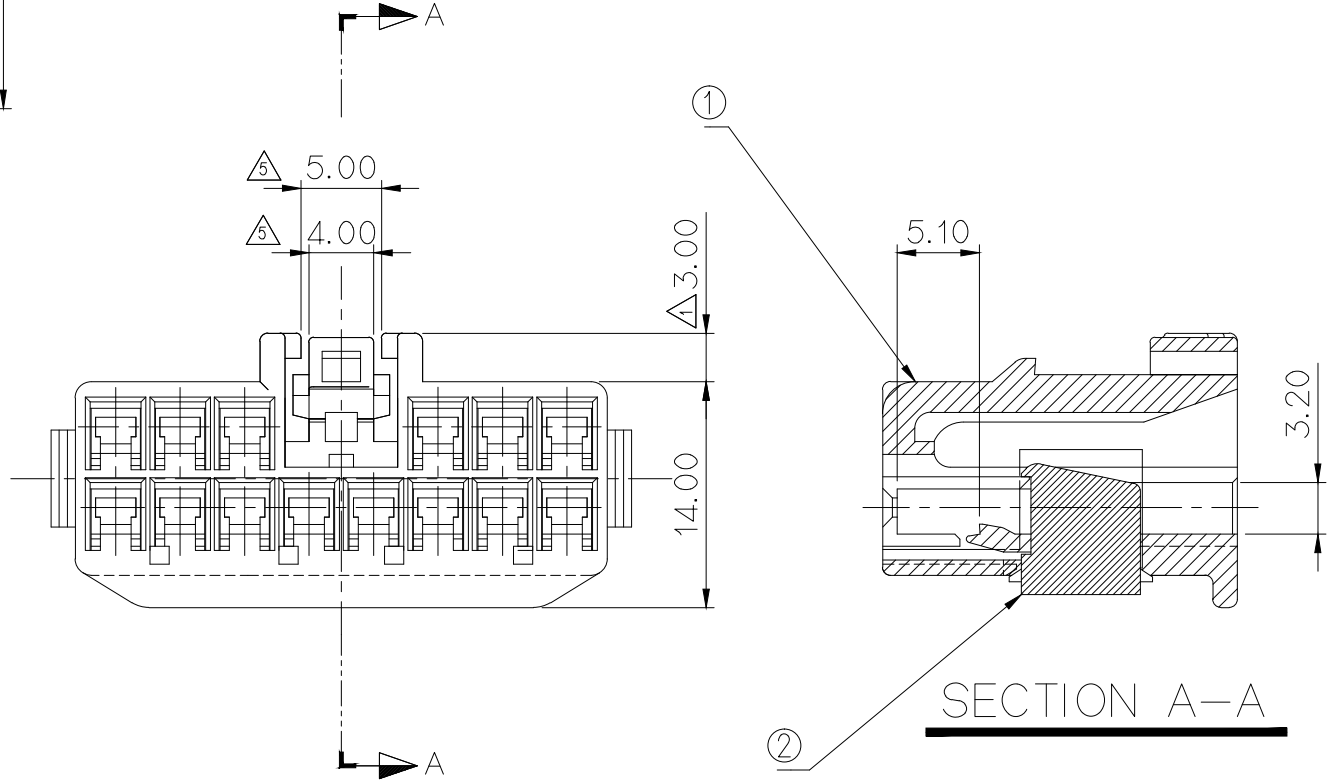

주 기

- 제품 기능상 유해한 BURR, 변형 및 WELDLINE 등이 없을 것.
- 적용 TERMINAL : ST730675, ST730676, ST730677
- 적용 HOUSING : MG641113
- SPACER는 본 도면과 같이 1차 LOCKING 상태로 유지 공급 할 것.
- 제품내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가 크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

5	ECO-1707-103 근거 도면 제작성	SY.L	KMH	CJH	17.07.10	MATERIAL	SEE TABLE	KETA KOREA ELECTRIC TERMINAL CO., LTD.
4	시방변경(S050126) 근거 도면 제작성 (작업성 개선 위한 형상 변경)	KDJ	MKNO	KKJ	'05.06.01	FINISH	SEE TABLE	
3	고객 요청에 의한 개선완료	SHIN	KO	KKJ	'03.08.30	WIRE RANGE		CLASS .090 II
2	작업필링성 개선	SHIN	KKJ	JJH	'03.04.18	INSULATION		TYPE
1	시방변경(990233)근거 형상변경	元	KKJ	JJH	'99.12.16			
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE	TOLPRANCE EXCEPT AS NOTED	SCALE 2/1	PART NO. MG651110
DR. JANG 97.4.4		CHK. KKJ JJH		3.19		PART NAME 090 II 14F HS'G ASSY		
CHK. JANG		3.20		APP. Watanabe		3.20		

APPROVED

2018-12-07

KOREA ELECTRIC
TERMINAL CO., LTD.
Korea Electric Te
rminal Co., LTD.

ISSUE MARK