

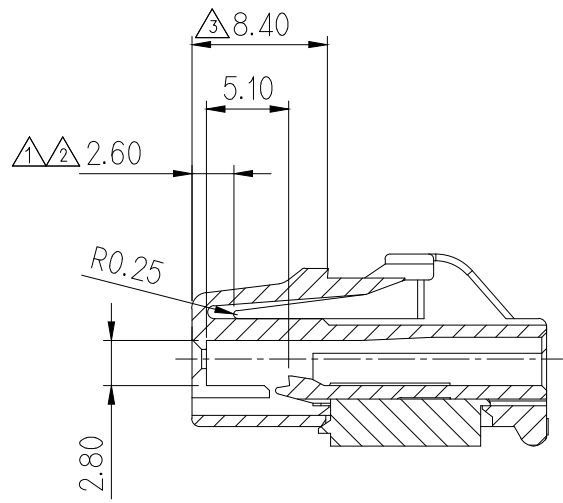
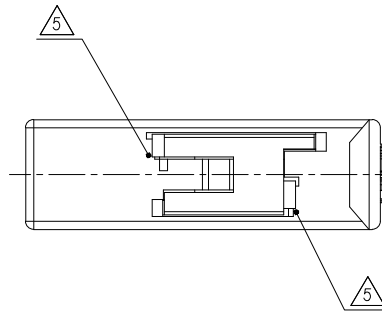
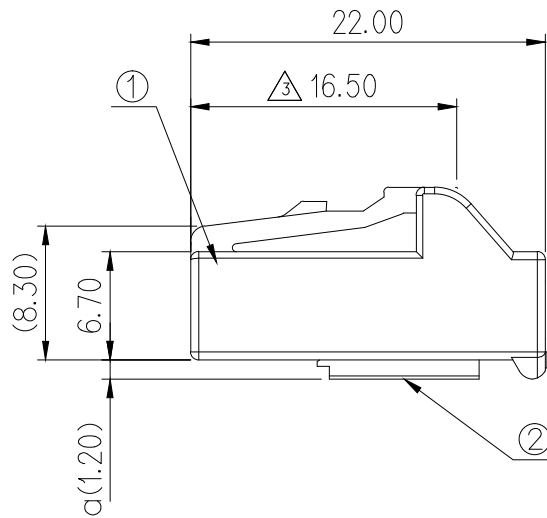


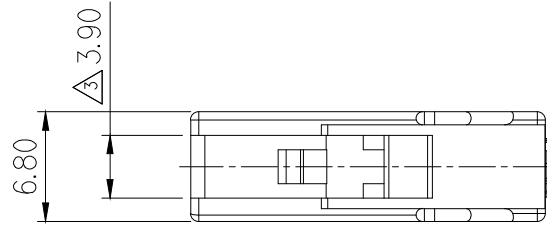

SECTION A-A




	NO.	MATERIAL	COLOR
*	0	P B T	NATURAL
	1		RED
	2		BLUE
	20		JADE
	3		YELLOW
	4		GRAY
	40		DARK GRAY
	41		LIGHT GRAY
*	5		BLACK
	6		DARK GREEN
	7		BROWN
	8		LIGHT GREEN
	9		MAGENTA
	11		ORANGE

NO.	PART NO.	PART NAME	MATERIAL	FINISH
①	MG671192	.090Ⅱ 1P PLUG HOUSING	SEE TABLE	SEE TABLE
②	MG671193	.090Ⅱ 1P PLUG SPACER	PBT	NATURAL

GENERAL TOLERANCE (HOUSING)							USED ON
1MAX	5MAX	10MAX	20MAX	45MAX	ANGLE	ECCENT	
±0.10	±0.15	±0.20	±0.25	±0.30	±30'	0.10	

주 기

- 기능상 유해한 BURR 및 WELDLINE등이 없을것.
- 적용 TERMINAL : ST730675-3, ST730676-3, ST730677-3
- 적용 HOUSING : MG641197, MG641199
- SPACER는 본 도면과 같이 1차 LOCK'G 상태로 유지, 공급할 것.
- 'a'부 치수는 0.80 - 1.40 까지 관리한다.
- 제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

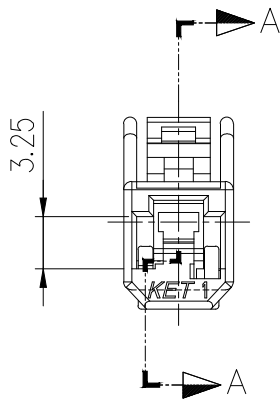

△ NOTE

- MUST BE FREE OF BURR, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
- APPLICABLE TERMINAL : ST730675-3, ST730676-3, ST730677-3
- APPLICABLE HOUSING : MG641197, MG641199
- THE MOLD DRAWING IN THE SAME WAY, SPACER IS NORMAL CONDITION TO SUPPLY WITH 1st LOCKING STATE.
- 'a'SECTION MANAGE DIMENSION IS 0.80 - 1.40.
- 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD,MERCURY, CADMIUM,HEXAVALENT CHROMIUM,PBBs,PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

△5	ECO-2003-092 근거 도면 재작성	HYJ	CJH	'20.03.06	MATERIAL		SEE TABLE		KOREA ELECTRIC
△4	ECO-1912-108 근거 도면 재작성 (영문 추가 추가)	SKM	HYJ	CJH	'19.12.09	FINISH			SEE TABLE
△3	ECO-1607-187 근거 도면 재작성 (Lock 크기 중대 및 가이드 크기 중대)	LJJ	CKY	LSY	'16.07.14	WIRE RANGE		CLASS	.090 II
△2	ECO-1509-194 근거 도면 재작성	KCS	AJH	LSY	'15.09.14	INSULATION		TYPE	7283-1010
△1	설계사양변경(S090023) 근거 도면 재작성	CDH	LSY	KKJ	'09.02.16	TOLERANCE EXCEPT AS NOTED		SCALE 2/1	PART NO. MG651194
LTR	REVISION RECORD		DR.	CHK.	APP.	DATE			
DR.	WON. '97.03.07		CHK.	KKJ		3/17	PART NAME		
CHK.	JWK 3/17		APP.	WATANABE		3/18	.090 II 1P PLUG HOUSING ASS'Y		



ISSUE MARK