


GENERAL TOLERANCE (HOUSING)					USED ON
10MAX	20MAX	45MAX	ANGLE	ECCENT	
±0.2	±0.25	±0.3	±30'	0.1	

NO.	PART NO.	PART NAME	MATERIAL	COLOR
①	MG671573	050 18P PLUG HS'G	PBT	SEE TABLE
②	MG671574	050 18P PLUG R/HOLDER		NATURAL

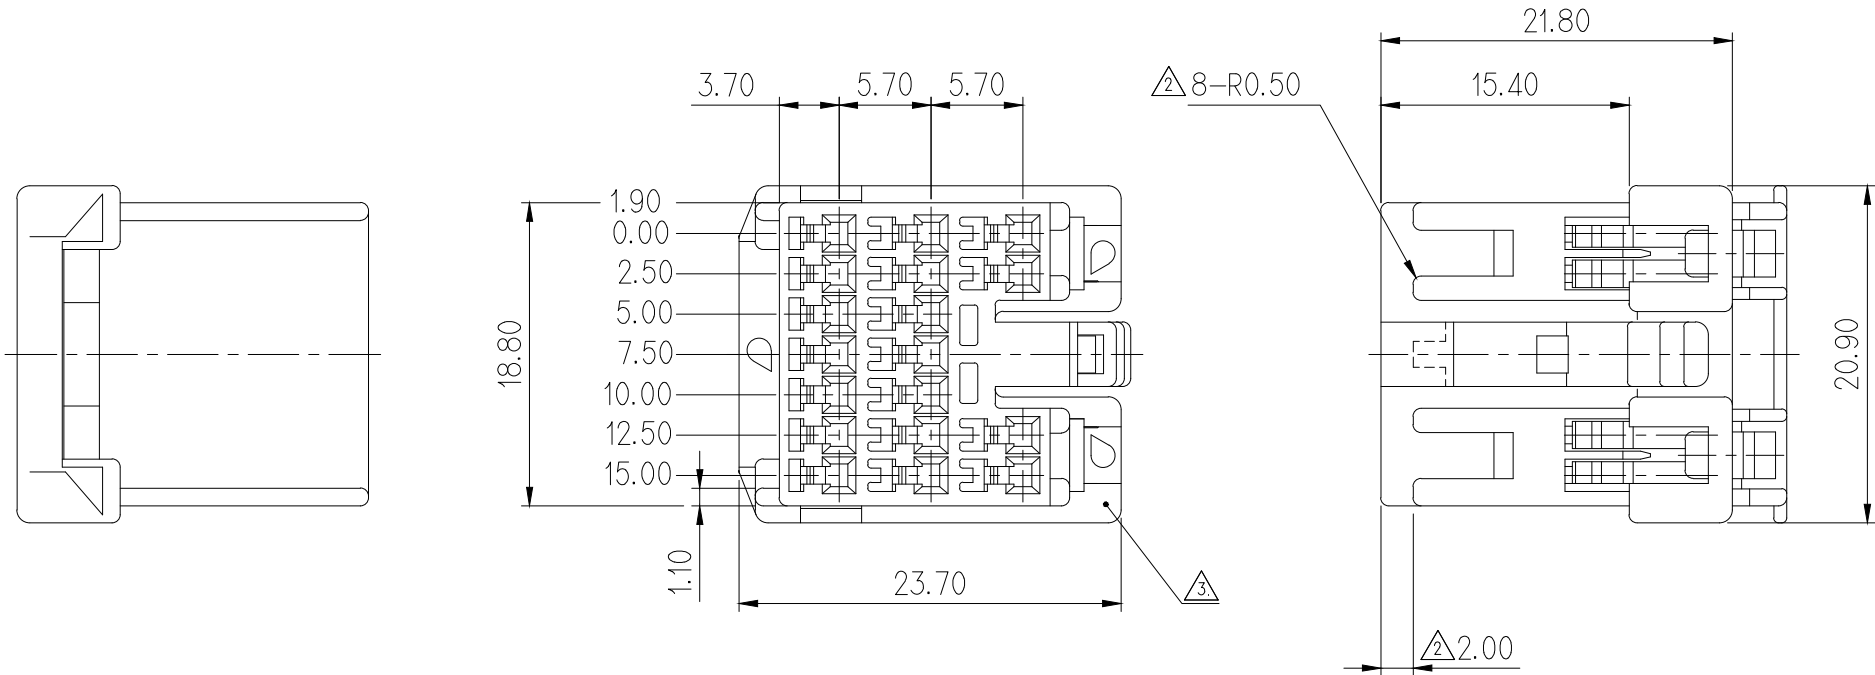


주 기

- 제품기능상 유해한 FLASH, 변형 및 WELDLINE등이 없을것.
- 적용 TERMINAL : ST730751
- 적용 HOUSING : MG641572
- R/HOLDER는 본 도면과 같이 1차 LOCK'G상태로 유지, 공급할 것.
- 제품내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가 크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

NOTE

- MUST BE FREE OF FLASH, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
- APPLICABLE TERMINAL : ST730751
- APPLICABLE HOUSING : MG641572
- R/HOLDER MUST BE KEEP AND SUPPLY FIRST LOCKING CONDITION AS THIS DRAWING.
- 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY, CADMIUM, HEXAVALENT CHROMIUM, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

△3	NO.	MATERIAL	COLOR
*	0	P B T	NATURAL
	1		RED
*	2		BLUE
	3		YELLOW
	4		GRAY
	40		DARK GRAY
	41		LIGHT GRAY
	5		BLACK
	6		DARK GREEN
	7		BROWN
	8		LIGHT GREEN
	9		MAGENTA
	11		ORANGE

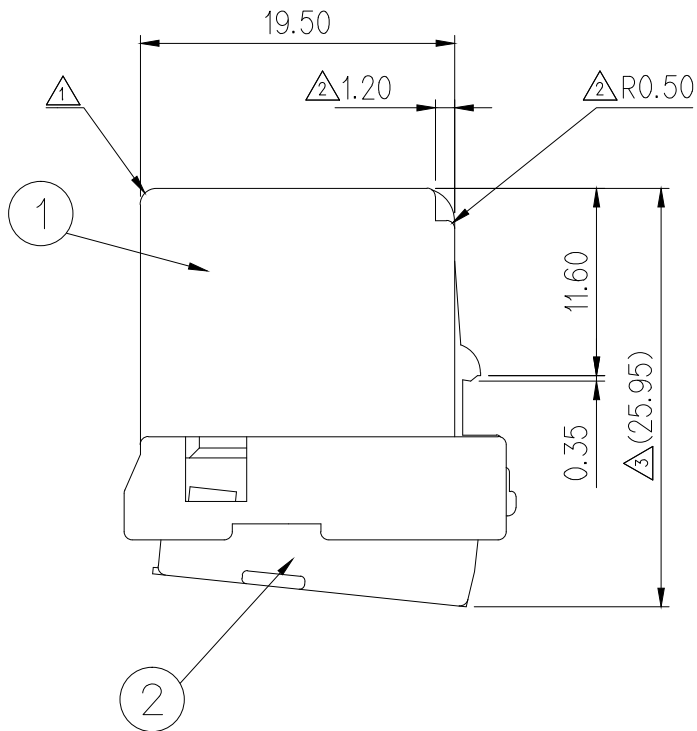


APPROVED

2018-12-07

KOREA ELECTRIC
TERMINAL CO., LTD.
Korea Electric Te
rminal Co., LTD.

ISSUE MARK

					MATERIAL	SEE TABLE	 KOREA ELECTRIC TERMINAL CO., LTD.
					FINISH	SEE TABLE	
△3	ECO-1711-281 근거 도면 제작성	KJC	HYJ	CJH	'17.11.20		
△2	시방변경(S040184)근거 도면 제작성	KDJ	KKJ	KCH	'04.11.15	WIRE RANGE	CLASS
△1	고지리 방지 형상 변경 CU'요청사항	KDJ		KCH	'04.06.18	INSULATION	TYPE 050
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SCALE 2/1
DR.	WK CHOI '99.05.12	CHK.	KKJ	5/13	JJH	5/13	PART NO. MG651575
CHK.		APP.	WATANABE	5/13		PART NAME	050 18P PLUG HS'G ASS'Y