
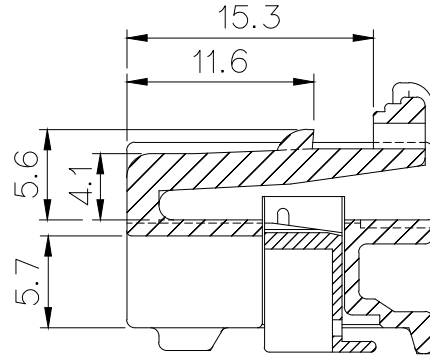
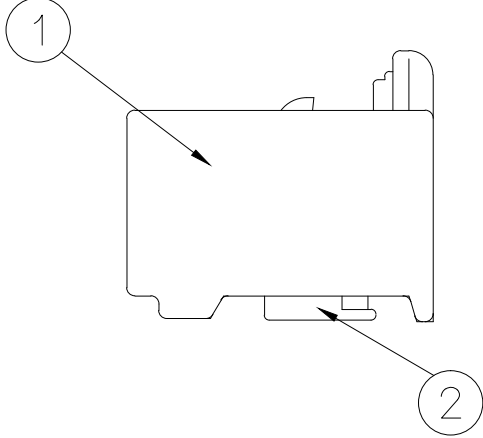
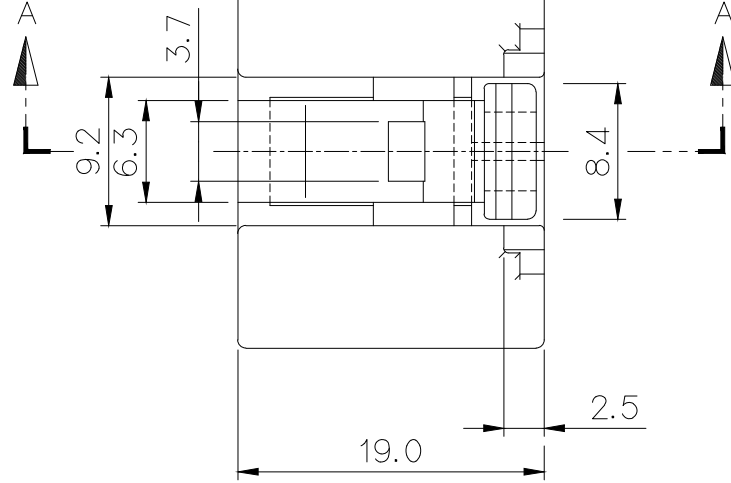



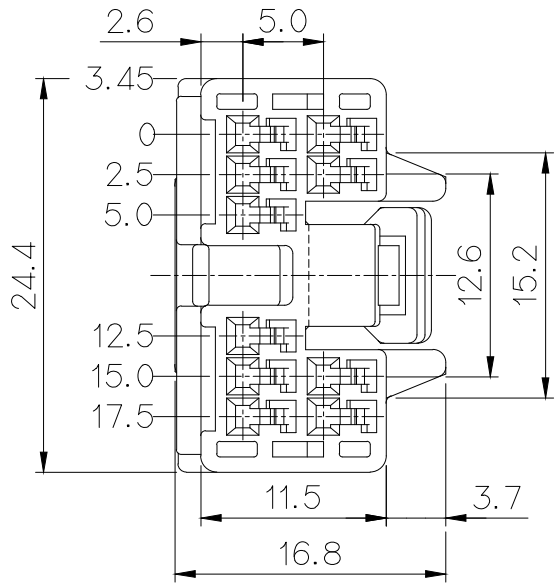


SECT. A-A

△	NO.	MATERIAL	COLOR
*	0	P B T	NATURAL
△*	1		RED
*	2		BLUE
	20		JADE
	3		YELLOW
	4		GRAY
	40		DARK GRAY
	41		LIGHT GRAY
*	5		BLACK
	6		DARK GREEN
	7		BROWN
	8		LIGHT GREEN
	9		MAGENTA
	11		ORANGE

NO.	PART NAME	PART NO.	MATERIAL	FINISH
1	050 10P PLUG HS'G	MG671578	PBT	SEE COLOR TABLE
2	050 10P PLUG SIDE SPACER HS'G	MG671579	PBT	NATURAL

GENERAL TOLERANCE (HOUSING)					USED ON
10MAX	20MAX	45MAX	ANGLE	ECCENT	
±0.2	±0.25	±0.3	±30'	0.1	

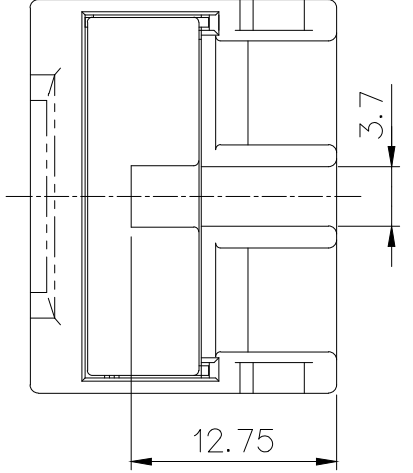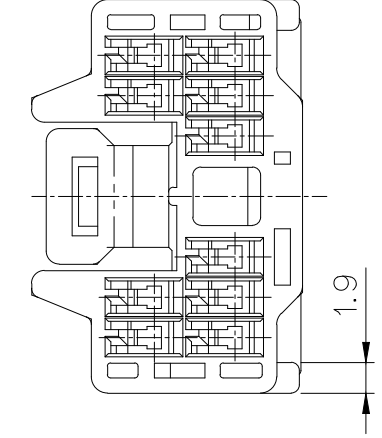

NOTE

- MUST BE FREE OF FLASH, SINK AND IMPERFECTION THAT AFFECT FUNCTION.
- APPLICABLE TERMINAL : ST730751
- APPLICABLE HOUSING : MG641732, MG641577
- R/HOLDER MUST BE KEEP AND SUPPLY FIRST LOCKING CONDITION AS THIS DRAWING.
- 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD,MERCURY, CADMIUM,HEXAVALENT CHROMIUM,PBBs,PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

주 기

- 제품의 기능상 유해한 BURR, 변형 및 WELDLINE등이 없을 것.
- 적용 TERMINAL: ST730751
- 적용 HOUSING: MG641732, MG641577
- SIDE SAPCER를 본 도면과 같이 1차 LOCK'G상태로 유지,공급할 것.
- 제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

APPROVED

2018-12-07

KOREA ELECTRIC
TERMINAL CO., LTD.
Korea Electric Te
rminal Co., LTD.

ISSUE MARK

					MATERIAL	SEE TABLE	KOREA ELECTRIC TERMINAL CO., LTD.
					FINISH	SEE TABLE	
					WIRE RANGE		CLASS
△2	ECO-1703-255 근거 도면 제작성	YTK NKJ CJH '17.03.17			INSULATION		TYPE 050
△1	TABLE 추가에 따른 제작성	WK KKJ JJH '99.5.27					PART NO. MG651580
LTR	REVISION RECORD	DR. CHK. APP. DATE			TOLERANCE EXCEPT AS NOTED	SCALE 2/1	
	DR. W.K. CHOI 98.08.31	CHK. KKJ 98.09.04			PART NAME	050 10P PLUG HS'G ASS'Y	
	CHK.	APP. JJH 98.09.05					