

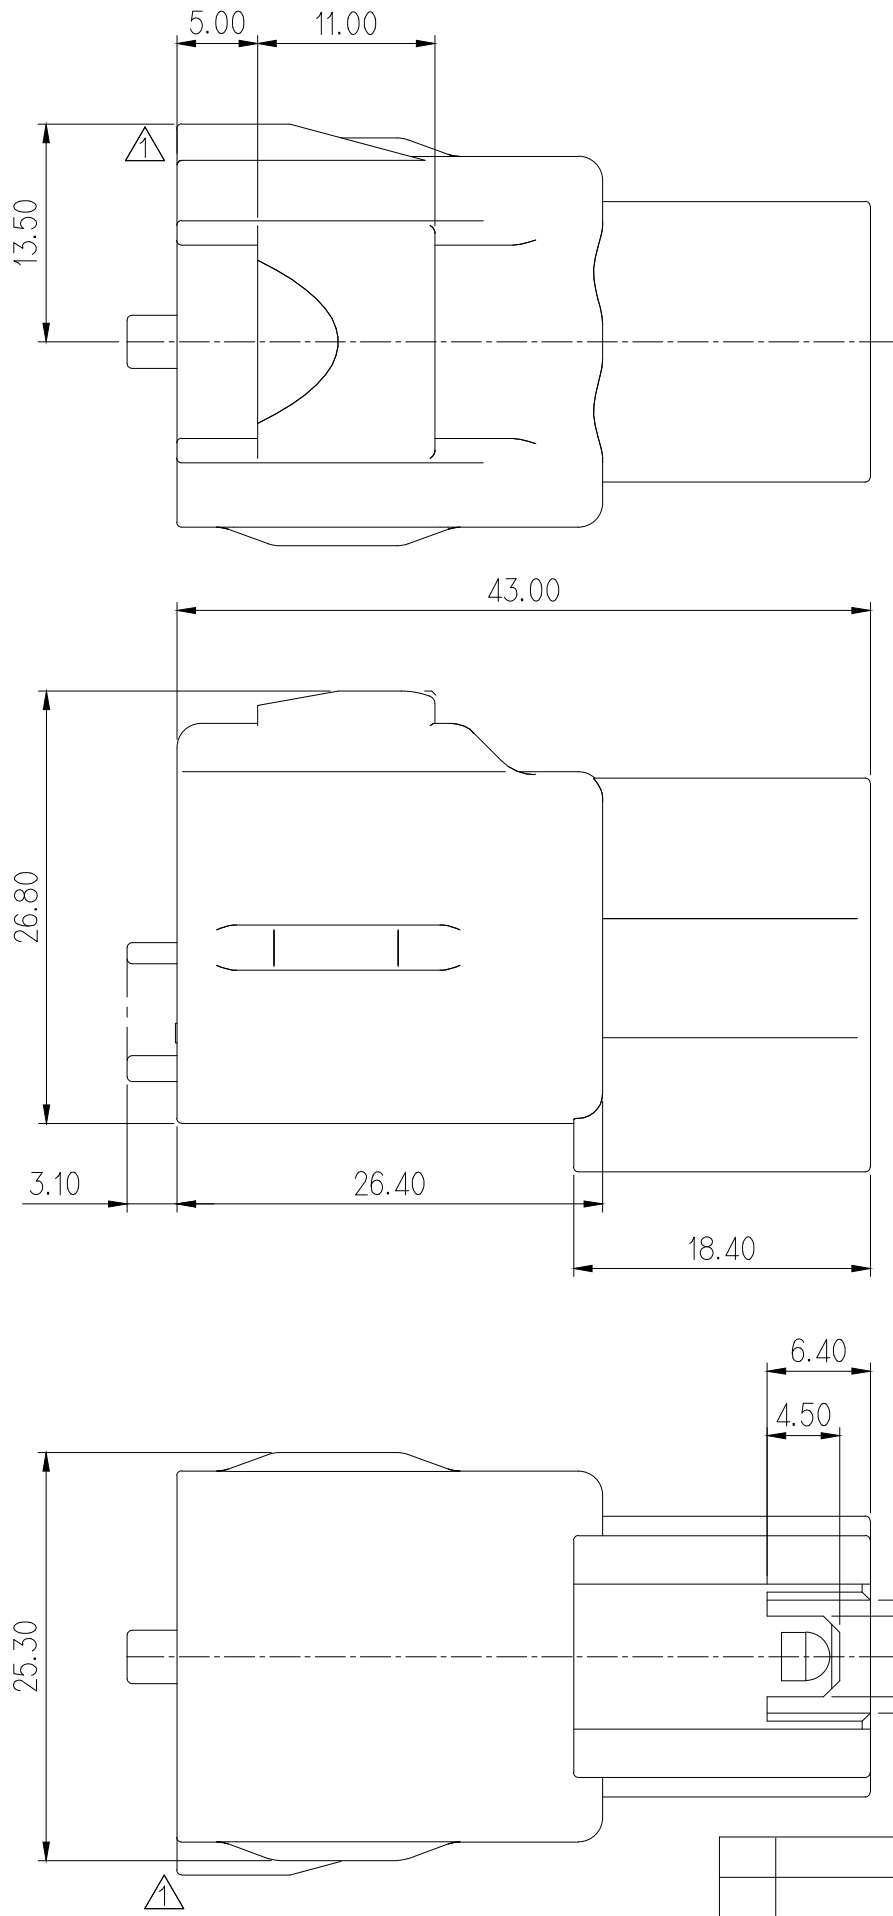


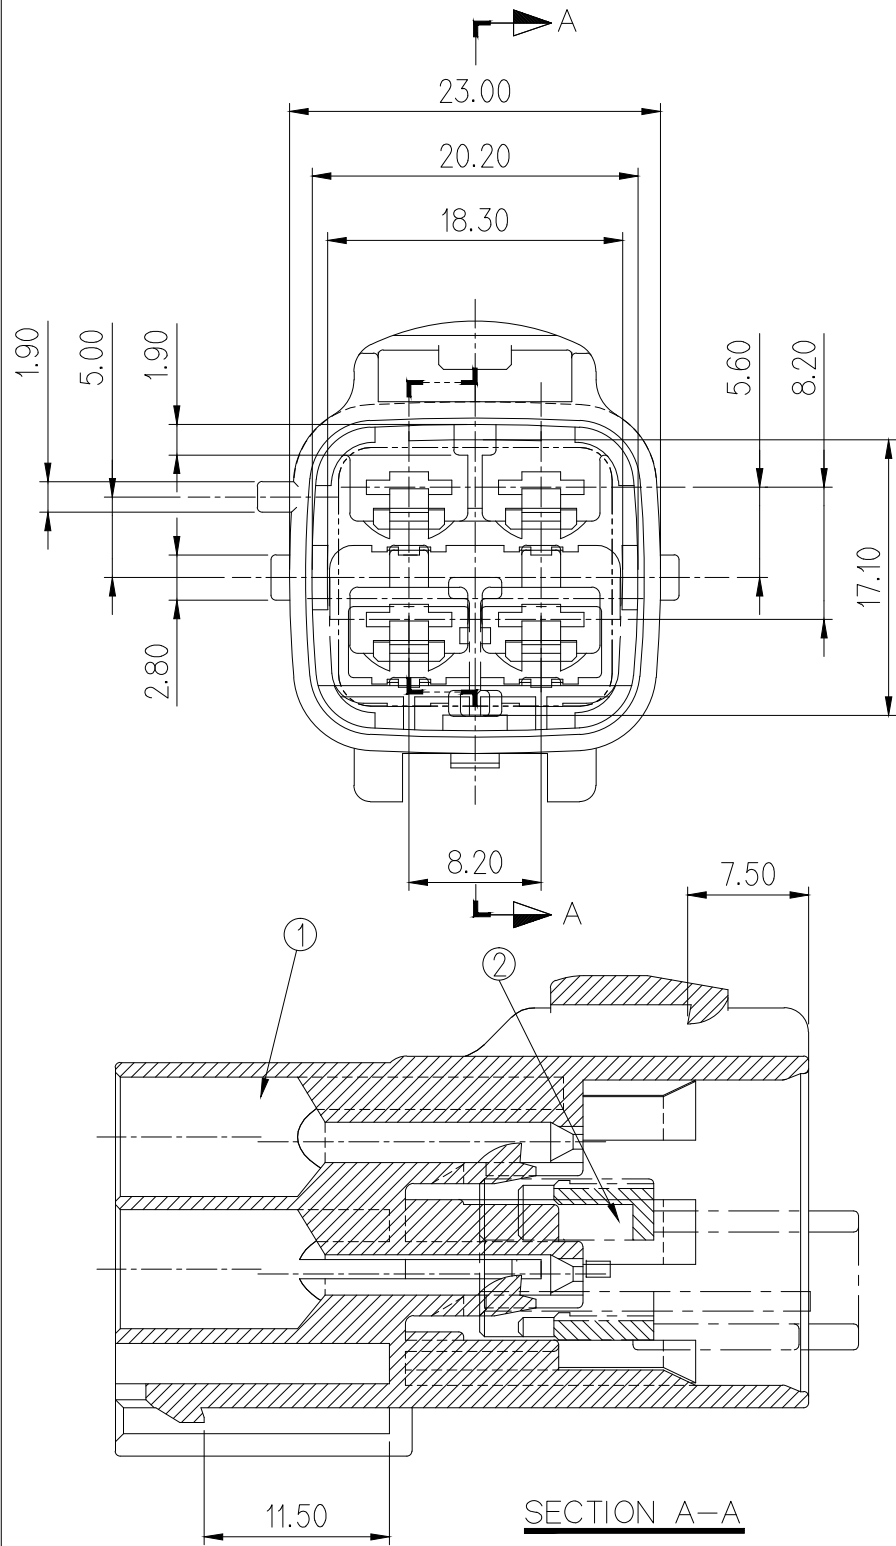

주 기

- 1.기능상 유해한 BURR 및 WELDLINE등이 없을것.
- 2.적용 REC HS'G : MG641744
- 3.적용 TAB TM'L : ST740734,735,736
- 4.제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.



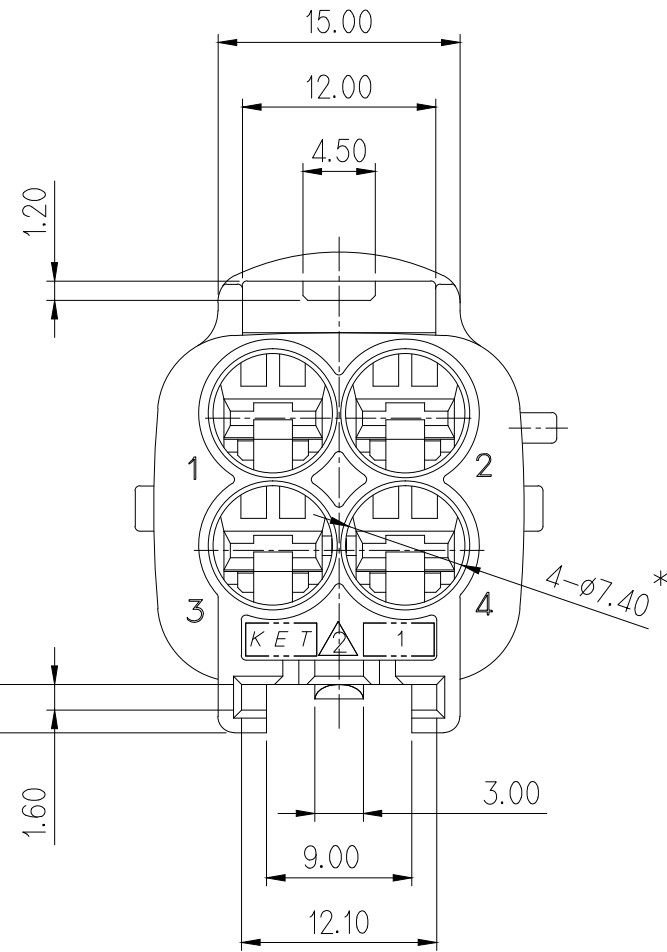


NO.	MATERIAL	COLOR
0	P B T	NATURAL
1		RED
2		BLUE
3		YELLOW
4		GRAY
40		DARK GRAY
41		LIGHT GRAY
5		BLACK
6		DARK GREEN
7		BROWN
8		LIGHT GREEN
9		MAGENTA
11		ORANGE

NOTE

1. MUST BE FREE OF FLASH, SINK AND IMPERFECTION THAT AFFECT FUNCTION.
2. APPLICABLE REC HS'G : MG641744
3. APPLICABLE TAB TM'L : ST740734,735,736
4. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD,MERCURY, CADMIUM,HEXAVALENT CHROMIUM,PBBs,PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

2	MG671746	187II WP 4P PLUG F/H	PBT	NATURAL	1
1	MG671745	187II WP 4P PLUG HS'G	PBT	BLACK	1
NO.	PART NO.	PART NAME	MATERIAL	FINISH	U/S

					MATERIAL	SEE TABLE	 KOREA ELECTRIC TERMINAL CO., LTD.	
					FINISH	SEE TABLE		
					WIRE RANGE		CLASS	 187 II
					INSULATION		TYPE	
					TOLERANCE EXCEPT AS NOTED	SEE TABLE	SCALE	2/1
					PART NAME	187 II WP 4P PLUG ASS'Y		
					DR.	MAN 98.11.19.	CHK.	KJ KIM 12. 4.
					CHK.	BK LEE 12. 7.	APP.	JH CHO 12. 9.

APPROVED

2018-12-07

KOREA ELECTRIC
TERMINAL CO., LTD.
Korea Electric Te
rminal Co., LTD.

ISSUE MARK