
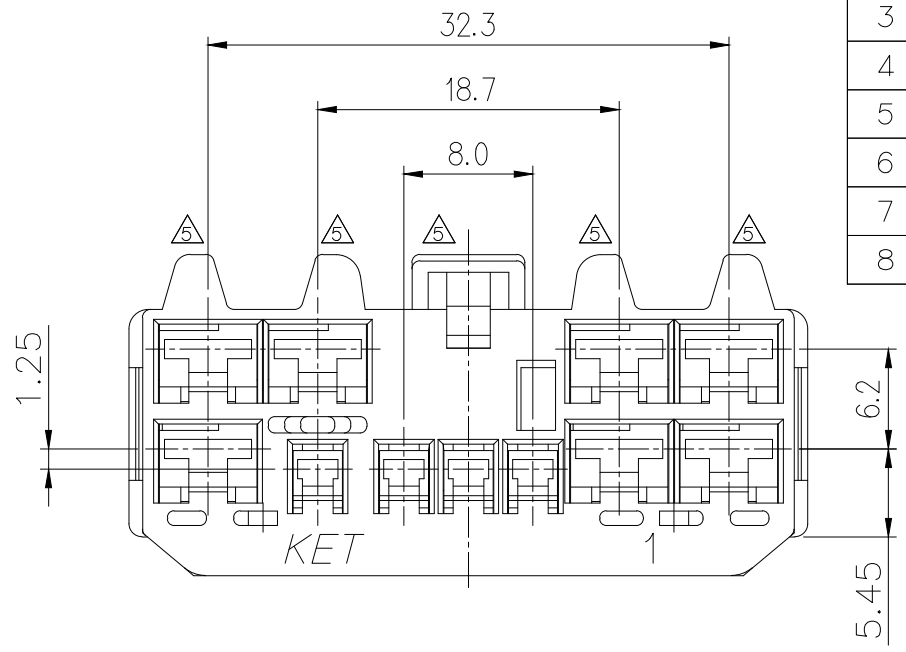


GENERAL TOLERANCE (HOUSING)					USED ON
10MAX	20MAX	45MAX	ANGLE	ECCENT	
±0.2	±0.25	±0.3	±30'	0.1	

NO.	PART NO.	PART NAME	MATERIAL
1	MG671915	1809 11P PLUG HS'G	PBT
2	MG671916	1809 11P PLUG SPACER	PBT

NO.	MATERIAL	COLOR
0	P B T:	NATURAL
1		RED
2		BLUE
3		YELLOW
4		GRAY
5		BLACK
6		W/GREEN
7		BROWN
8	GREEN	

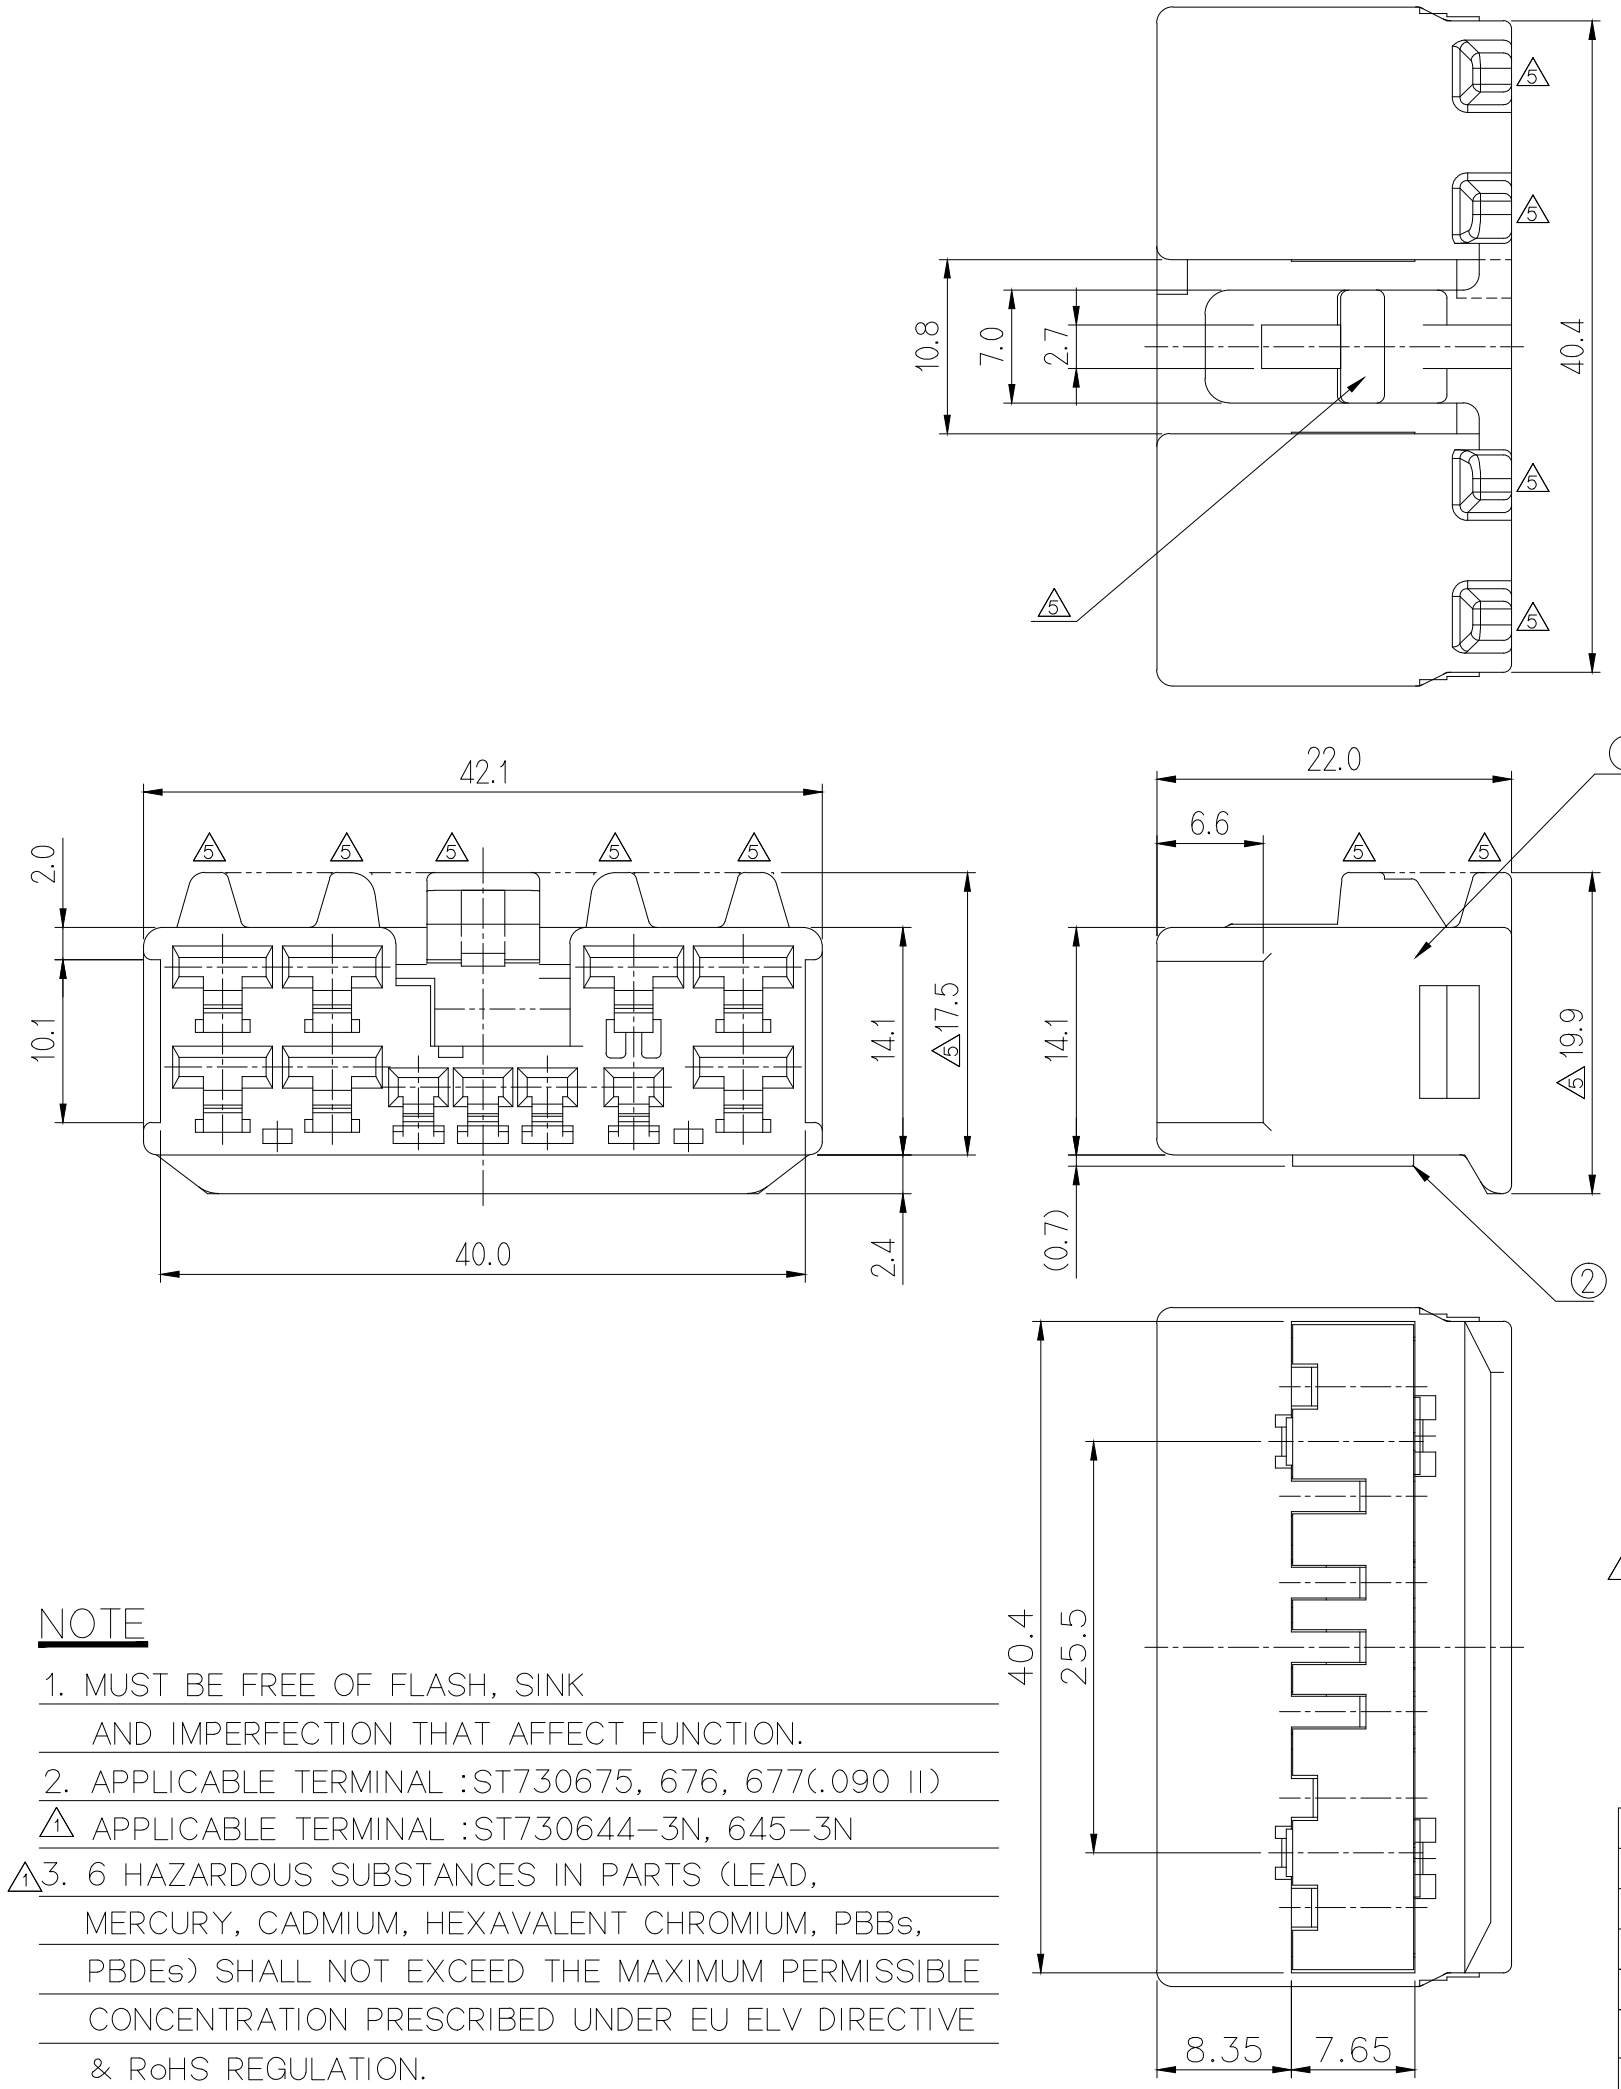

NOTE

- MUST BE FREE OF FLASH, SINK AND IMPERFECTION THAT AFFECT FUNCTION.
- APPLICABLE TERMINAL :ST730675, 676, 677(.090 II)
- APPLICABLE TERMINAL :ST730644-3N, 645-3N
- 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY, CADMIUM, HEXAVALENT CHROMIUM, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

주 기

- 기능상 유해한 BURR 및 WELDLINE등이 없을것.
- 적용 TERMINAL: ST730675, 676, 677(.090 II)
- 적용 TERMINAL: ST730644-3N, 645-3N, 646-3N(.187 II)
- 제품내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

APPROVED

2018-12-11

KOREA ELECTRIC TERMINAL CO., LTD.
Korea Electric Terminal Co., LTD.

LTR	REVISION RECORD	DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SCALE	PART NO.
		SH HEO	KKJ		99.11.19	SEE TABLE	2/1	MG651917
			CHOSH		99.11.19			
						PART NAME		1809 11P PLUG HS'G(187(7)+090(4))

SEE TABLE	ISSUE MARK
DIE NO	

KET KOREA ELECTRIC TERMINAL CO., LTD.

WIRE RANGE CLASS YAZAKI

INSULATION TYPE 7283-1118