


PART NO.

CUSTOMER DRAWING

DIMENSIONS IN MM

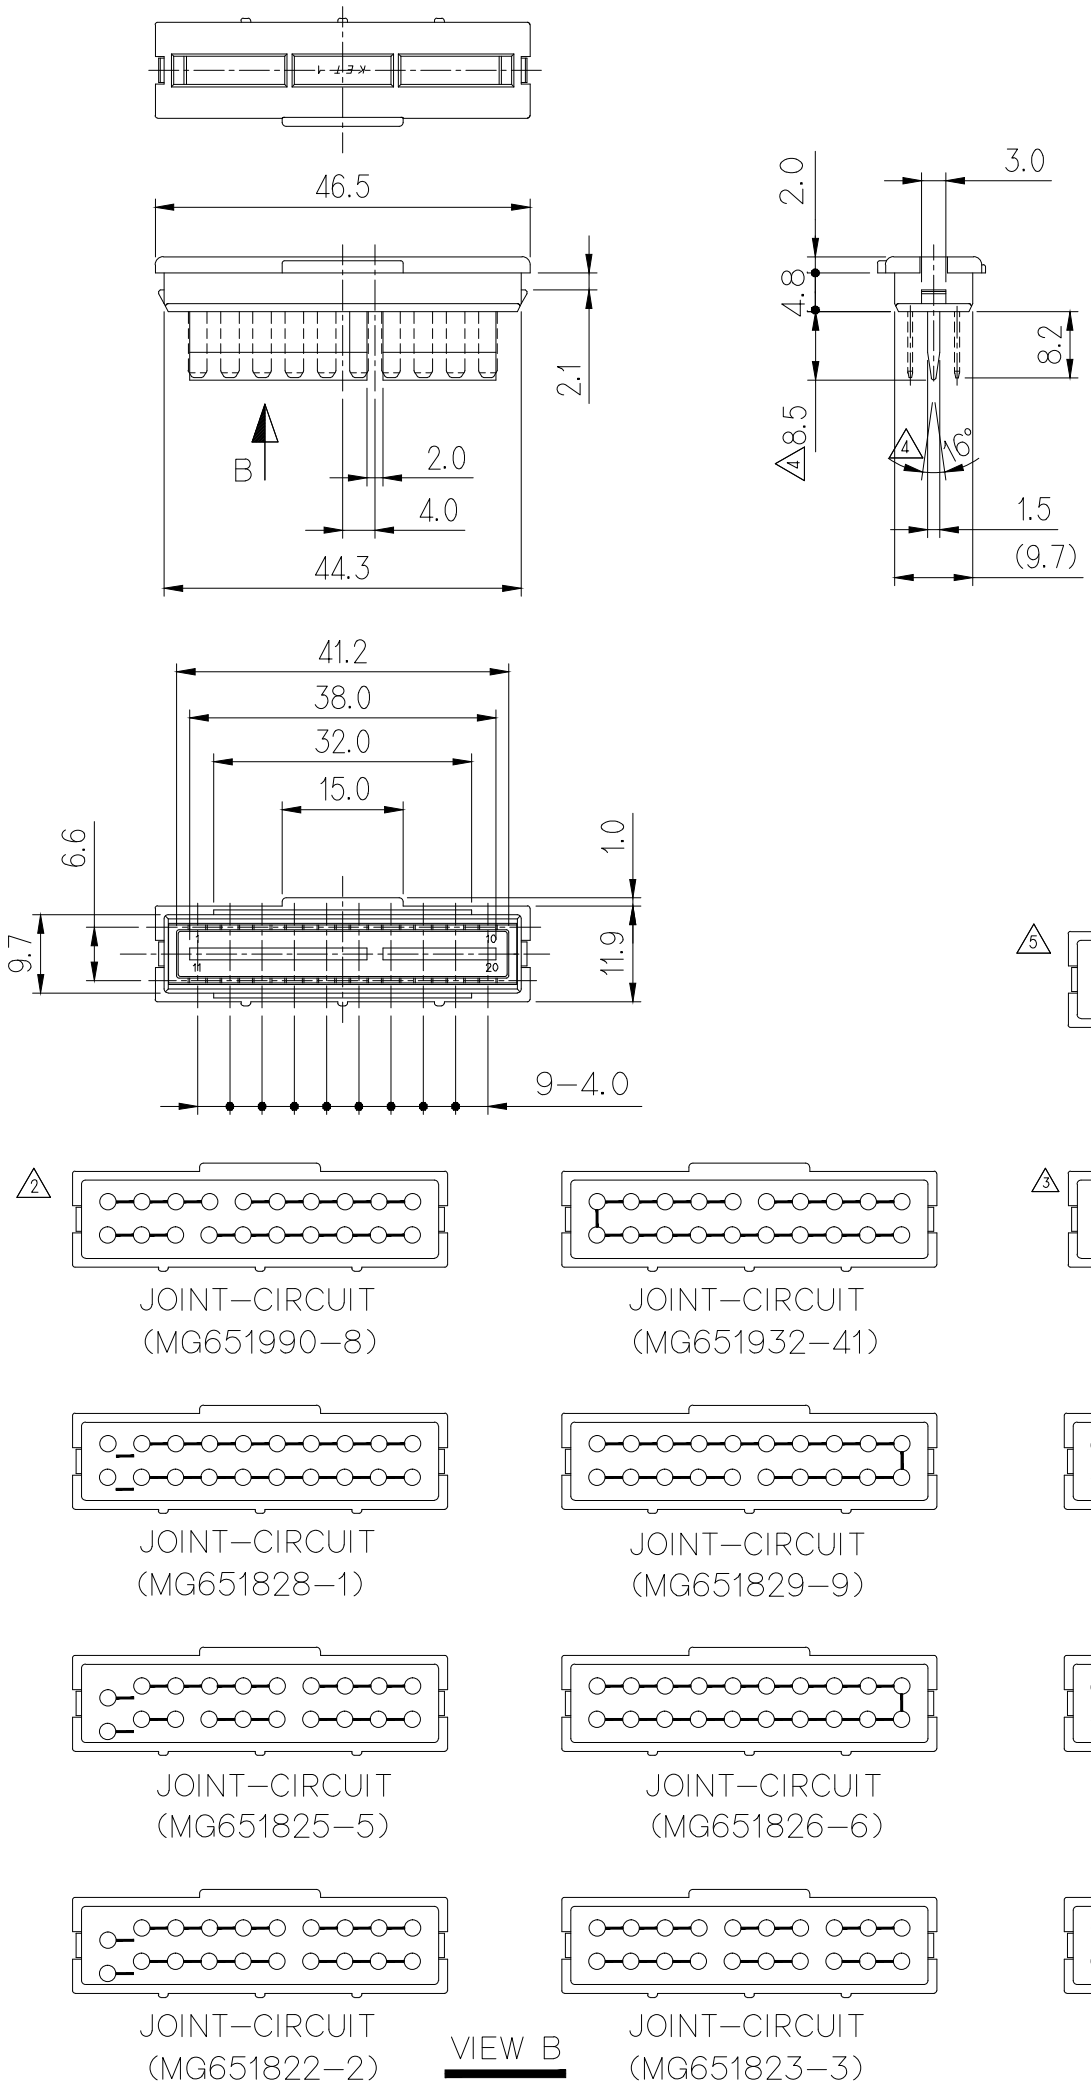

GENERAL TOLERANCE (HOUSING)							USED ON
10 MAX	50 MAX	100 MAX	250 MAX	250 VR	ANGLE	ECCENT	
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	
GENERAL TOLERANCE (TERMINAL)							
10 MAX	20 MAX	45 MAX	45 VR	ANGLE	ECCENT		
±0.2	±0.25	±0.3	±0.5	±30'	0.1		

* ASSY LIST

NO.	ASSY P/NO	PART NAME	FINISH	MATERIAL
1	MG651822-2	090II JOINT 20M ASSY	BLUE	PBT + BRASS (PRE-TIN)
2	MG651823-3	090II JOINT 20M ASSY	YELLOW	
3	MG651824-40	090II JOINT 20M ASSY	DARK GRAY	
4	MG651825-5	090II JOINT 20M ASSY	BLACK	
5	MG651826-6	090II JOINT 20M ASSY	GREEN	
6	MG651827-7	090II JOINT 20M ASSY	BROWN	
7	MG651828-1	090II JOINT 20M ASSY	RED	
8	MG651829-9	090II JOINT 20M ASSY	MAGENTA	
9	MG651830	090II JOINT 20M ASSY	WHITE	
10	MG651932-41	090II JOINT 20M ASSY	LIGHT GRAY	
11	MG651990-8	090II JOINT 20M ASSY	GREEN	
12	MG651820-11	090II JOINT 20M ASSY	ORANGE	
13	MG653716-20	090II JOINT 20M ASSY	JADE	

NOTE

- MUST BE FREE OF FLASH, SINK AND IMPERFECTION THAT AFFECT FUNCTION.
- APPLICABLE HOUSING : MG621818
- 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY, CADMIUM, HEXAVALENT CHROMIUM, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

주 기

- 기능상 유해한 BURR 및 WELDLINE등이 없을 것.
- 적용 HOUSING : MG621818
- 제품내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 지정한 최대 허용 농도를 초과해서는 안된다.

5	설계사양변경통보서(S050296)근거 도면 재작성.	SSH	HSH	KKJ	2005.12.19	MATERIAL	SEE TABLE	 KOREA ELECTRIC TERMINAL CO., LTD.	
4	시방변경(S050095)근거 재작성.	KDJ	KKJ	KCH	2005.04.25	FINISH	SEE TABLE		
3	시방변경(990092)근거 재작성.	MAN	KKJ	CJH	1999.06.22	WIRE RANGE			
2	시방변경(990023)근거 재작성.	MAN	KKJ	CJH	1999.03.08	INSULATION		CLASS	
1	시방변경(980242)근거 재작성.	MAN	KKJ	CJH	1998.11.18			TYPE 090II	
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SEE TABLE	SCALE 1/1	PART NO. SEE TABLE
DR.	MAN. '98.10.15.	CHK.	KKJ		10/30	PART NAME 090II JOINT 20M ASSY			
CHK.	LBK 10/30	APP.	CHOSH		10/30				