
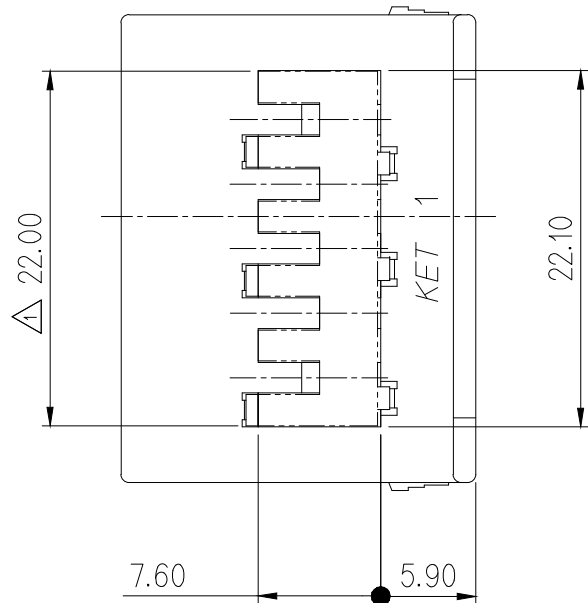
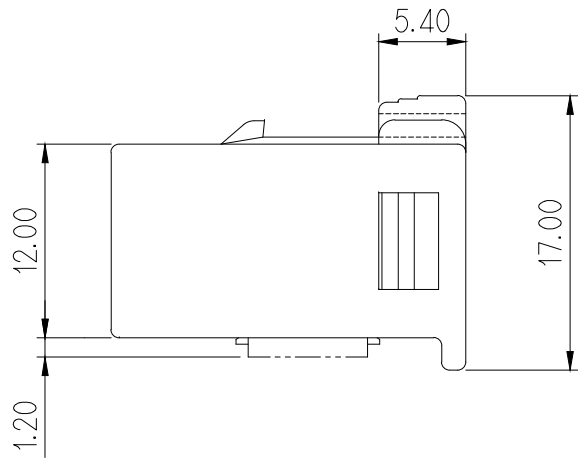
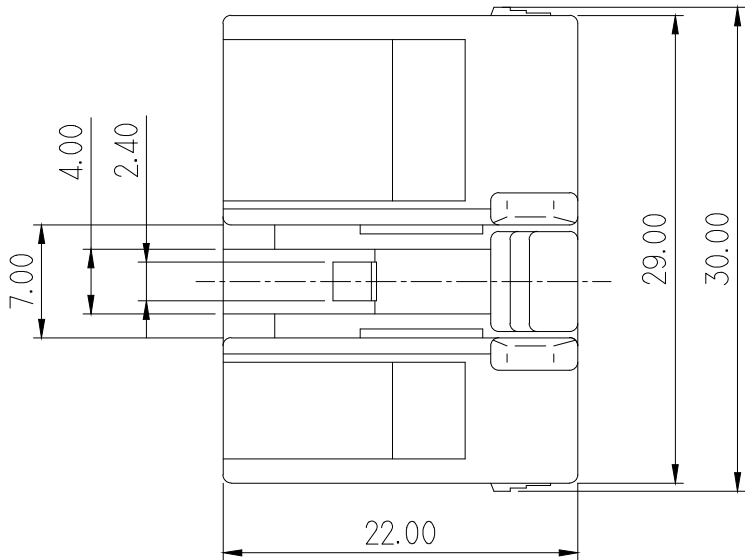
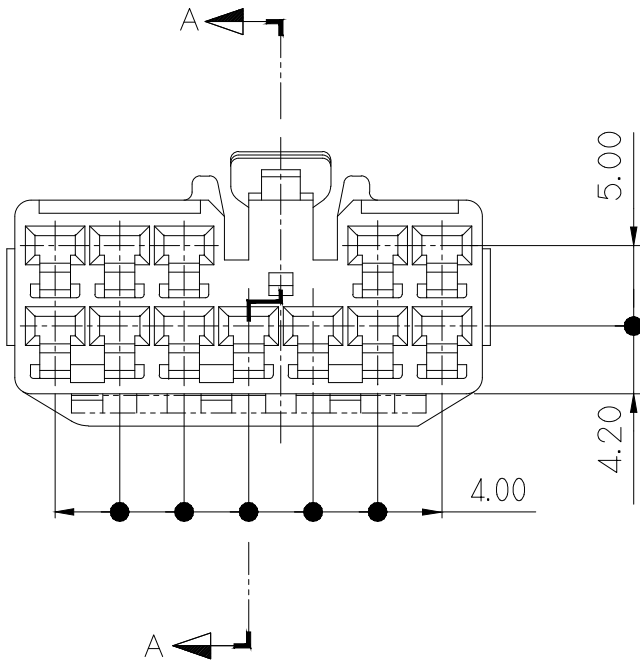



NO.	PART NO.	PART NAME	METERIAL	FINISH
1	MG671966	090 II 12F HS'G	PBT	NATURAL
2	MG671967	090 II 12F SPACER	PBT	NATURAL

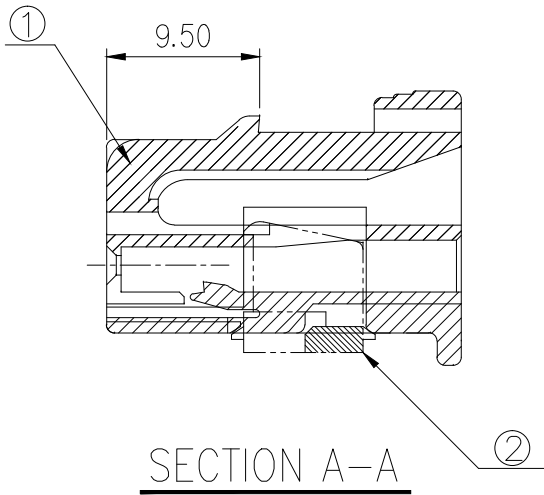

GENERAL TOLERANCE (HOUSING)							USED ON
10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT	
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	

NOTE

1. MUST BE FREE OF FLASH, SINK AND IMPERFECTION THAT AFFECT FUNCTION.
2. APPLICABLE TERMINAL : ST730675, 676, 677, 731100
3. THE MOLD DRAWING IN THE SAME WAY, SPACER IS NORMAL CONDITION MAINTENANCE AND SUPPLY WITH FIRST LOCKING.
- △ 4. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY, CADMIUM, HEXAVALENT CHROMIUM, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

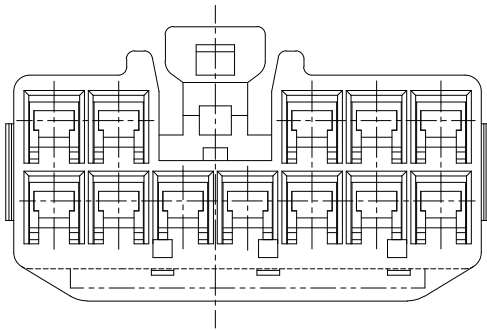

주 기

1. 기능상 유해한 BURR 및 WELDLINE등이 없을것.
2. 적용 TERMINAL: ST730675, 676, 677, 731100
3. SPACER는 본 도면과 같이 1차 LOCK'G상태로 유지, 공급할 것.
- △ 4. 제품내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

					MATERIAL		SEE TABLE	 KOREA ELECTRIC TERMINAL CO., LTD.	
					FINISH		SEE TABLE		
					WIRE RANGE		CLASS		090 II
					INSULATION		TYPE		
	설계사양변경(S100109)근거 도면 재작성	LHS		'10.05.07	TOLERANCE EXCEPT AS NOTED	SCALE 2/1	PART NO.	MG651965	
LTR	REVISION RECORD	DR.	CHK.	APP.					DATE
DR.	MAN '99.09.09.	CHK.	09.10.		PART NAME				
CHK.		APP.	09.10.		090 II 12F ASSY				

APPROVED

2018-12-07

KOREA ELECTRIC
TERMINAL CO., LTD.
Product Developme
nt Team 1

ISSUE MARK