
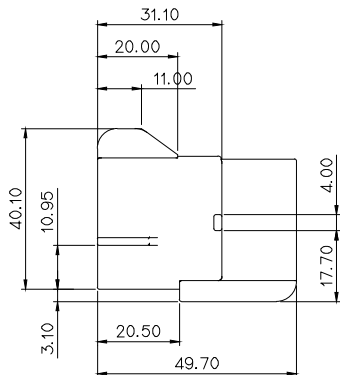
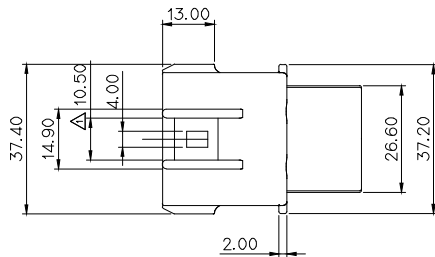
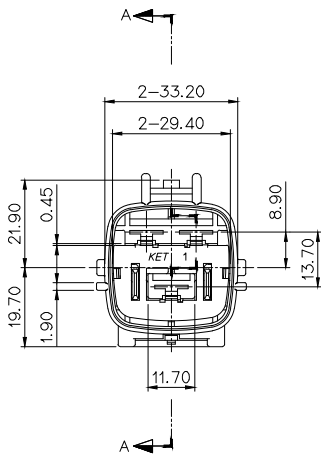
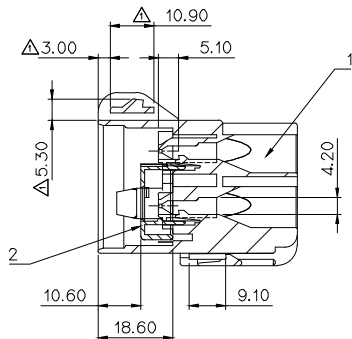


GENERAL TOLERANCE (HOUSING)							USED ON
10 MAX	50 MAX	100 MAX	250 MAX	250 VR	ANGLE	ECCENT	
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	

NO.	PART NO.	PART NAME	MATERIAL	FINISH
1	MG672288	.312 II WP 3M	PBT	BLACK
2	MG672289	.312 II WP 3P FRONT HOLDER		NATURAL



SECTION A-A

주 기

- 제품기능상 유해한 BURR, 변형 및 WELDLINE 등이 없을것.
- 적용 HOUSING: MG642292
- 적용 TERMINAL: ST740653, 654, 655
- 적용 WIRE SEAL: MG680953, MG680954
- 적용 DUMMY SEAL: MG680961
- 적용 CLIP: MG631970, MG631984

APPROVED

2018-12-07

KOREA ELECTRIC
TERMINAL CO., LTD.
Connector Development Team 1

ISSUE MARK

						MATERIAL	SEE TABLE	KET ENGINEERED	KOREA ELECTRIC TERMINAL CO., LTD.
						FINISH	SEE TABLE		
△ HOUSING COVER 0.5mm 이상 1.0mm 이하	ASY	HYJ	LSY	14.06.26		WIRE RANGE		CLASS	.312
△ LOCK 부형상변형	SWS	CHK	KKJ	10.10.13		INSULATION		TYPE	
LTR REVISION RECORD	DR	CHK	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SCALE	1/1	PART NO.	MG652290
DR. WON. 2000.7.28	CHK.			7.29		PART NAME	.312 II WP 3M ASSEMBLY		
CHK.	APP.	CHK		7.29					