


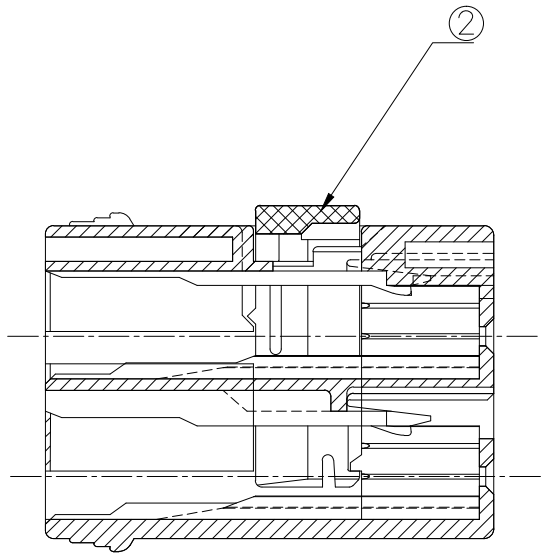


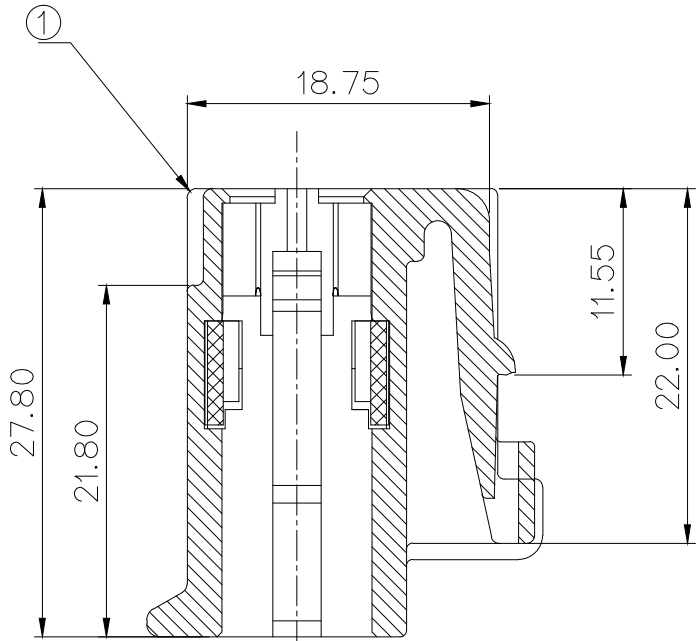

SECTION A-A


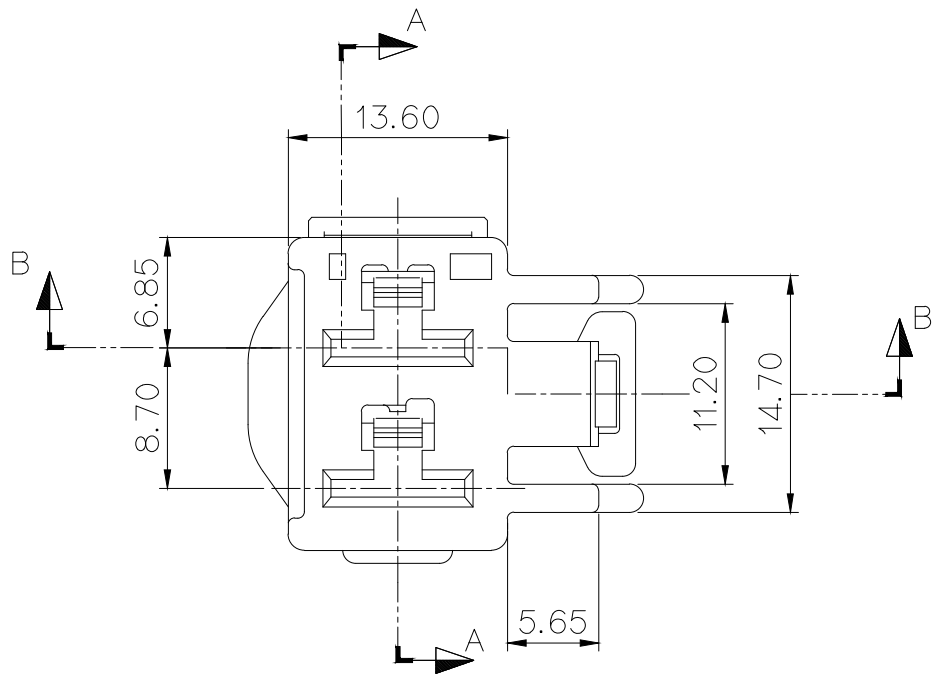


SECTION B-B

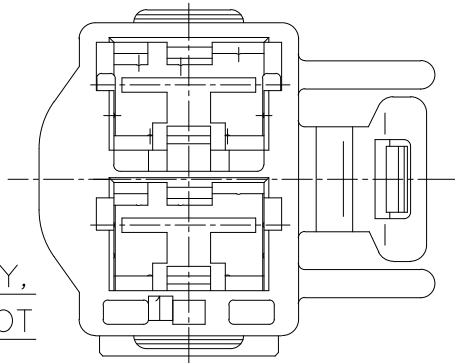

주 기

- 1.기능상 유해한 BURR 및 WELDLINE등이 없을것.
- 2.적용 TERMINAL : ST730642-3, 730643-3, △ST731112-3,△731147-3,△731532-3
- △3.제품내 함유된 6대 유해물질(납, 수은, 카드뮴, 6가 크롬,PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

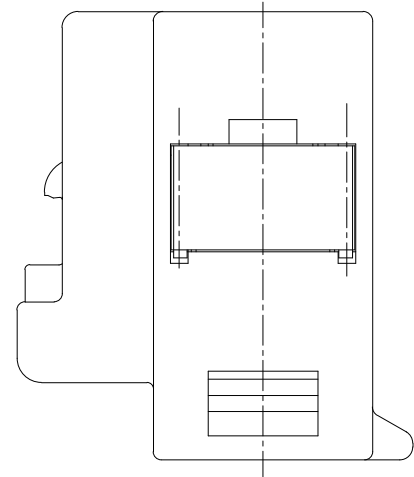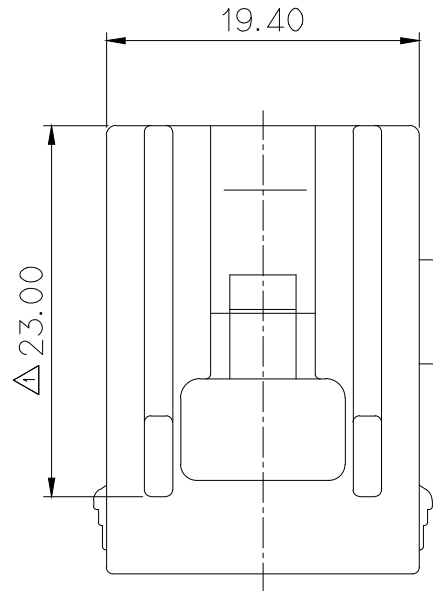

GENERAL TOLERANCE (HOUSING)							USED ON
10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT	
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	

△ *	NO.	MATERIAL	COLOR
	0	P B T	NATURAL
	1		RED
	2		BLUE
	20		JADE
	3		YELLOW
	4		GRAY
	40		DARK GRAY
	41		LIGHT GRAY
	5		BLACK
	6		DARK GREEN
	7		BROWN
	8		LIGHT GREEN
	9		MAGENTA
	11		ORANGE

NOTE

- 1. MUST BE FREE OF BURR,WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
- 2. APPLICABLE TERMINAL : ST730642-3, 730643-3 △ST731112-3,△731147-3,△731532-3
- △3. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MECURY, CADMIUM, HEXAVALENT, CHROMIUM, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE.

NO.	PART NO.	PART NAME	MATERIAL	FINISH
②	MG672499	312II 2F SPACER	PBT	YELLOW
①	MG672498	312II 2F HOUSING	SEE TABLE	SEE TABLE

APPROVED

2020-12-11

KOREA ELECTRIC
TERMINAL CO., LTD.
Korea Electric Te
rminal Co., LTD.

ISSUE MARK

					MATERIAL	SEE TABLE	 KOREA ELECTRIC TERMINAL CO., LTD.		
					FINISH	SEE TABLE			
△3	ECO-2004-245 근거 도면 재작성	KJH	HYJ	CJH	'20.04.21				
△2	적용 TERMINAL 품번 추가 (ECO-1508-259 근거 도면 재작성)	LJY	CSH	LSY	'15.08.24				
△1	설계사양변경(S070086)근거 도면 재작성 (LOCK GUIDE 실보강)	KBS	HSH	KKJ	'07.04.04				
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SCALE 1/1	PART NO.	MG652500
DR. LSY. '02.05.02		CHK. KKJ. '02.05.03							
		APP. JSI. '02.05.03		PART NAME					
				312II 2F ASSY					