


②	P901422	ASC WP JOINT 8P INNER SEAL	SILICONE	BLUE
①	MG672591	ASC WP JOINT 8F HS'G	SEE TABLE	SEE TABLE
NO.	PART NO.	PART NAME	MATERIAL	FINISH



주 기

1. 기능상 유해한 BURR 및 WELDLINE등이 없을것.
2. 상대 CONNECTOR : MG642583
- 적용 TERMINAL : ST730623, ST730624, ST730625
- △3. 제품내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

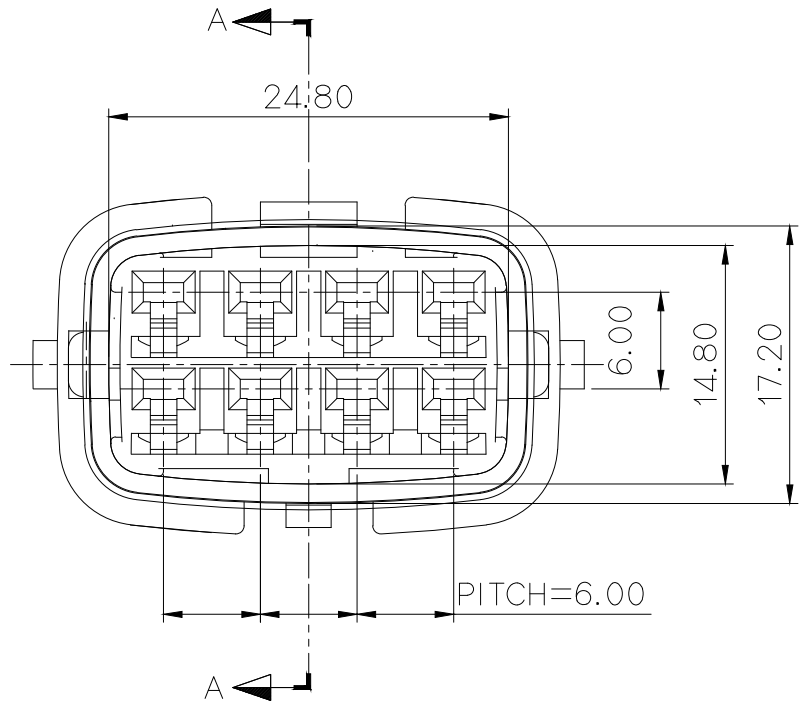


NOTE


1. MUST BE FREE OF BURR, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
2. MATCH'G CONNECTOR : MG642583
- APPLICABLE TERMINAL : ST730623, ST730624, ST730625
- △3. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY, CADMIUM, HEXAVALENT CHROMIUM, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

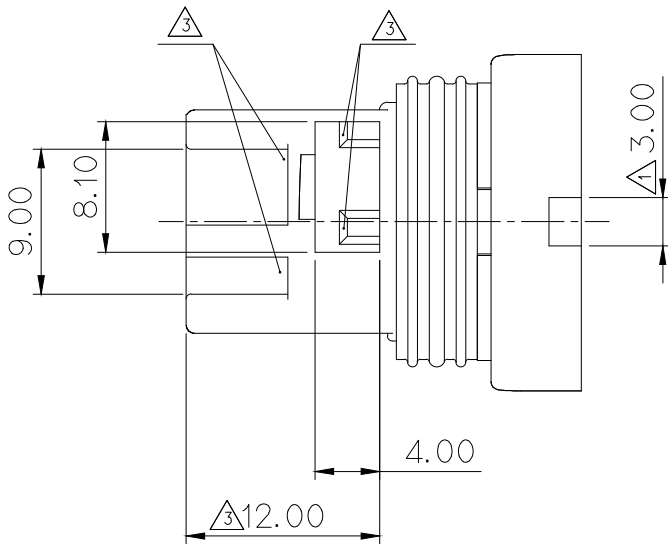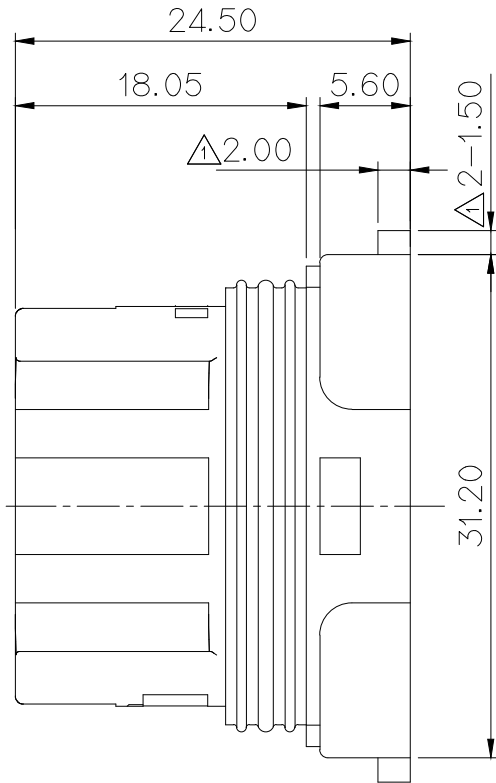

GENERAL TOLERANCE (HOUSING)							USED ON
10 MAX	50 MAX	100 MAX	250 MAX	250 VR	ANGLE	ECCENT	
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	

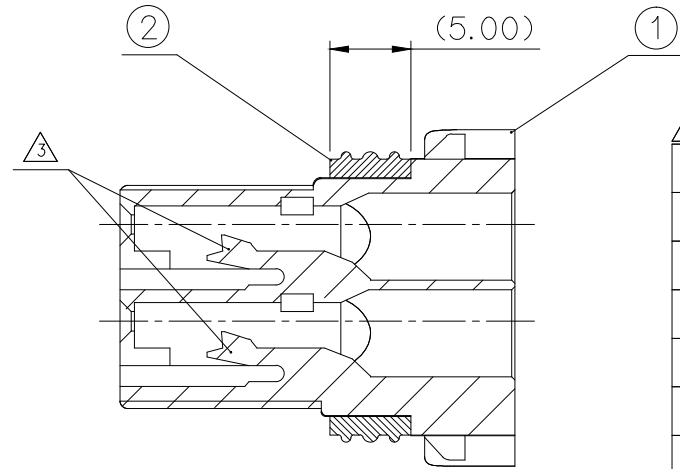

SECTION A-A

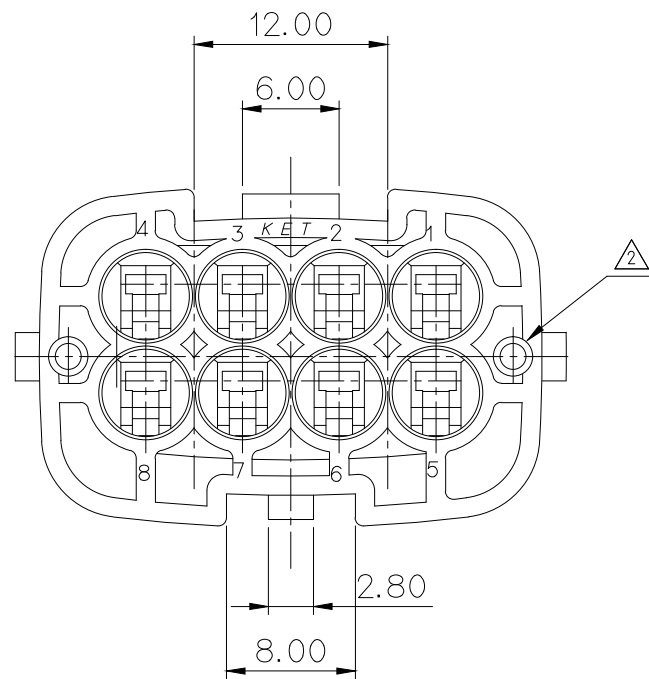

NO.	MATERIAL	COLOR
0	P B T	NATURAL
1		RED
2		BLUE
20		JADE
3		YELLOW
4		GRAY
40		DARK GRAY
41		LIGHT GRAY
* 5		BLACK
6		DARK GREEN
7		BROWN
8		LIGHT GREEN
9		MAGENTA
11		ORANGE

APPROVED

2020-12-09

KOREA ELECTRIC
TERMINAL CO., LTD.
Korea Electric Te
rminal Co., LTD.

ISSUE MARK

						MATERIAL		SEE TABLE	 KOREA ELECTRIC TERMINAL CO., LTD.	
△4	ECO-2008-282 근거 도면 제작성	KJH	HYJ	CJH	20.08.25	FINISH		SEE TABLE		
△3	ECO-1610-015 근거 도면 제작성	YTK	CJH	LSY	16.10.05	WIRE RANGE		—	CLASS	ASC
△2	INNER SEAL 이탈 방지 (ECO-1410-046) 근거	ASY	HYJ	LSY	14.10.07	INSULATION		—	TYPE	WP
△1	시방변경"030128"의거 도면제작성	LSY	KKJ	JJH	01.06.27	TOLERANCE EXCEPT AS NOTED		SCALE 2/1	PART NO.	MG652584
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE	PART NAME				
DR.	LSY. 02.11.11	CHK. KKJ. 02.11.11			ASC WP JOINT 8F ASS'Y					
		APP. CJH. 02.11.12								