


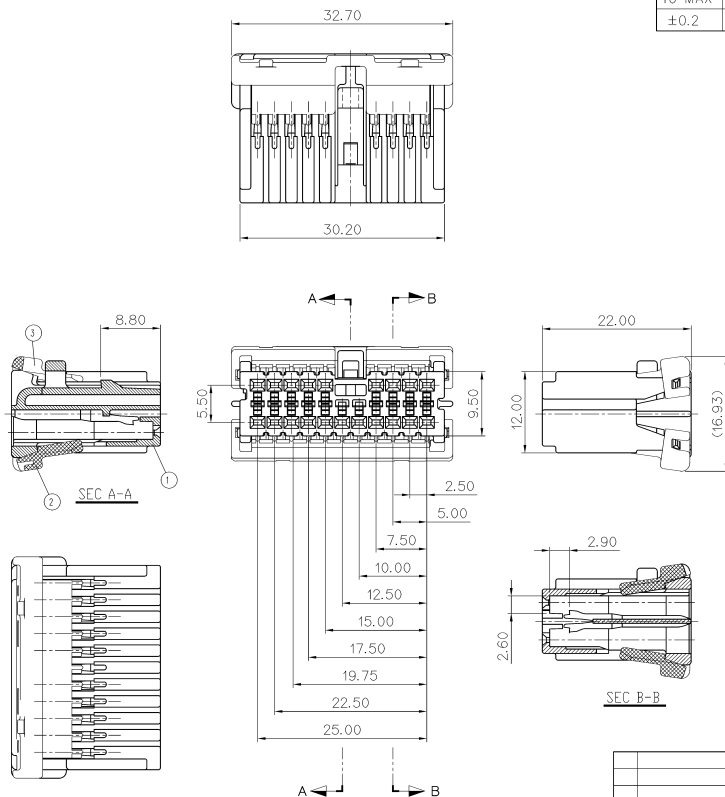

GENERAL TOLERANCE (HOUSING)

10 MAX	50 MAX	100 MAX	250 MAX	250 VR	ANGLE	ECCENT	USED ON
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	

NO.	PART NO.	PART NAME	MATERIAL	FINISH
①	MG673027	040III 20P FEMALE HS'G	PBT	NATURAL
②	MG673028	040III 20P FEMALE R/HOLDER (A)	PBT	NATURAL
③	MG673029	040III 20P FEMALE R/HOLDER (B)	PBT	NATURAL

주 기

1. 기능상 유해한 BURR 및 미성형이 없을것.
2. 상대 HOUSING PART NO. : MG643023
3. 적용 TERM' : ST730770 / ST740960

NOTE

1. MUST BE FREE OF BURR, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
2. APPLICABLE HOUSING : MG643023
3. APPLICABLE TERMINAL : ST730770 / ST740960



ISSUE MARK

						MATERIAL	SEE TABLE	KET (ENGINEERED) KOREA ELECTRIC TERMINAL CO., LTD.		
						FINISH	SEE TABLE			
						WIRE RANGE			CLASS 040III	
						INSULATION			TYPE	
LTR	REVISION RECORD		DR	CHK	APP	DATE	TERMINAL DESIGN AS NOTED	SCALE 2/1	PART NO	MG653026
DR.	KYM 2004.01.30		CHK.				SEE TABLE			
CHK.		01.30	APP.			01.30	PART NAME	040III 20P FEMALE ASS'Y		