



GENERAL TOLERANCE (HOUSING)							USED ON
10 MAX	50 MAX	100 MAX	250 MAX	250 VR	ANGLE	ECCENT	
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	

NOTE

- △1. APPLICABLE PART NO. : MG643200, MG643315
2. APPLICABLE TERMINAL NO. : ST730775, 776, 777
3. MUST BE FREE OF BURR, WEIDLIN AND IMPERFECTION THAT AFFECT FUNCTION.
4. THE MOLD DRAWING IN THE SAME WAY, SPACER IS NORMAL CONDITION MAINTENANCE AND SUPPLY WITH FIRST LOCKING.

주 기

- △1. 적용 HOUSING : MG643200, MG643315
2. 적용 TERMINAL : ST730775, 776, 777
3. 기능상 유해한 BURR 및 WELDLINE 등이 없을것.
4. SPACER는 본 도면과 같이 1차 LOCK'G 상태로 유지, 공급할것.

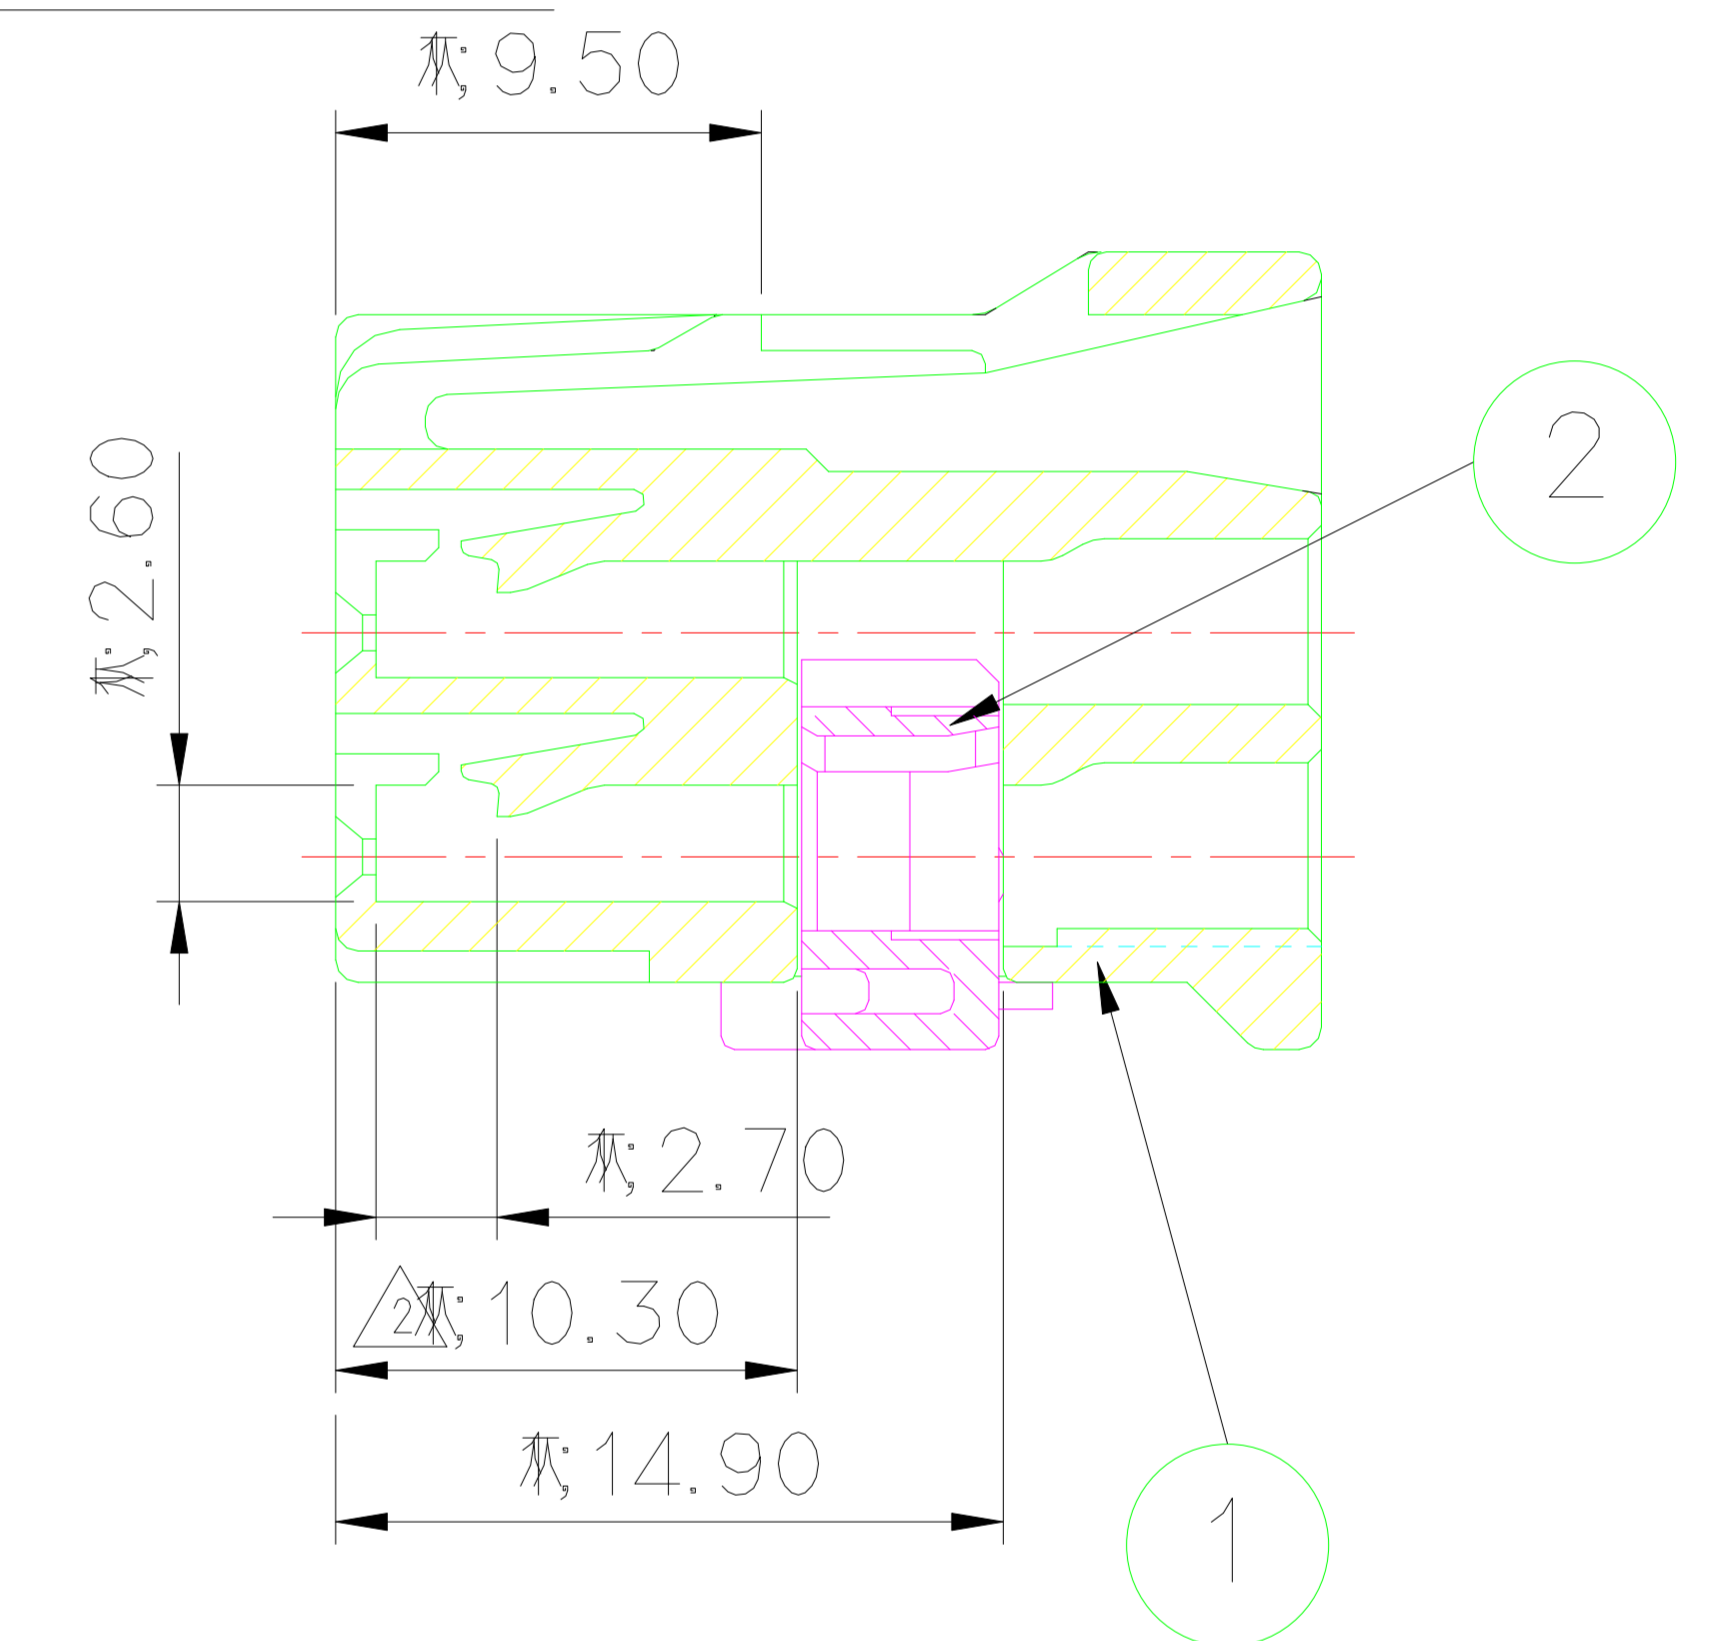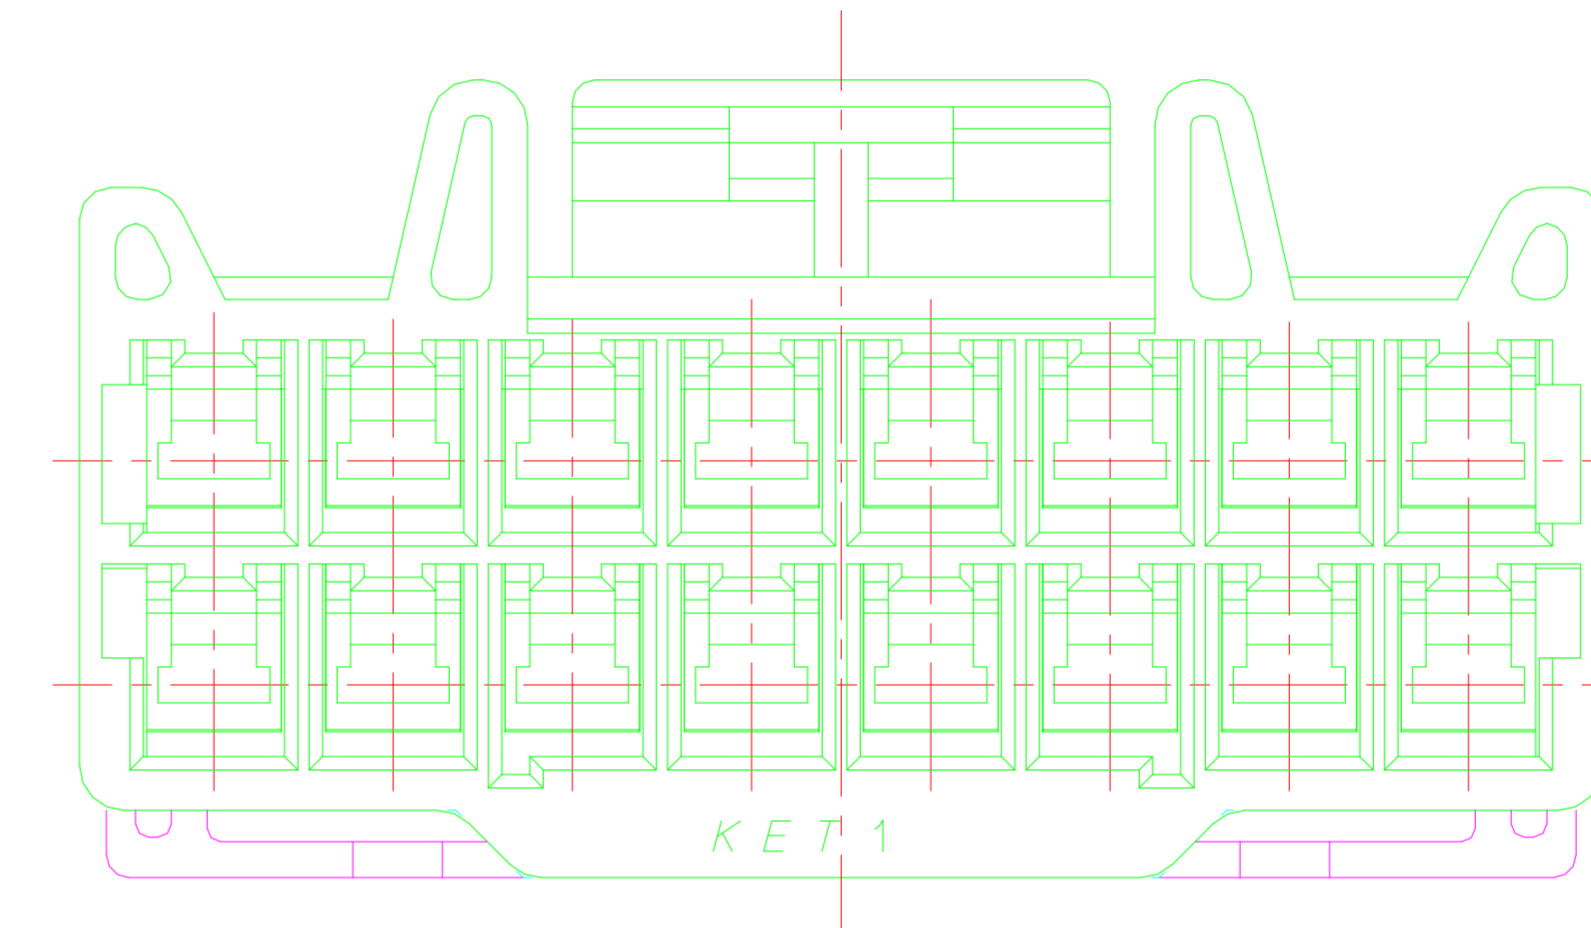

NO.	PART NAME	MATERIAL	FINISH	QTY.
1	ASCII 16F HOUSING	PBT	NATURAL	1
2	ASCII 16F SPACER	PBT	△ BLACK	1



ISSUE MARK

		MATERIAL	SEE TABLE	KET KOREA ELECTRIC TERMINAL CO., LTD.						
		FINISH	SEE TABLE							
△	TM'L 미 삽입 감지 기능 강화 위한 HS'G 및 SPACER 형상 변경	KDJ	K.J. KIM.	05.06.07	WIRE RANGE	CLASS	ASC-II			
△	LOCK해제성 개선, SPACER 색상변경	SHIN	C.H. KIM.	04.11.29	INSULATION	TYPE	.090			
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SCALE	2/1	PART NO.	MG653198
DR.	SHIN '04.02.12.	CHK.			2/11	SEE TABLE				
CHK.		APP.			2/11					ASC II 16F HS'G ASSY