



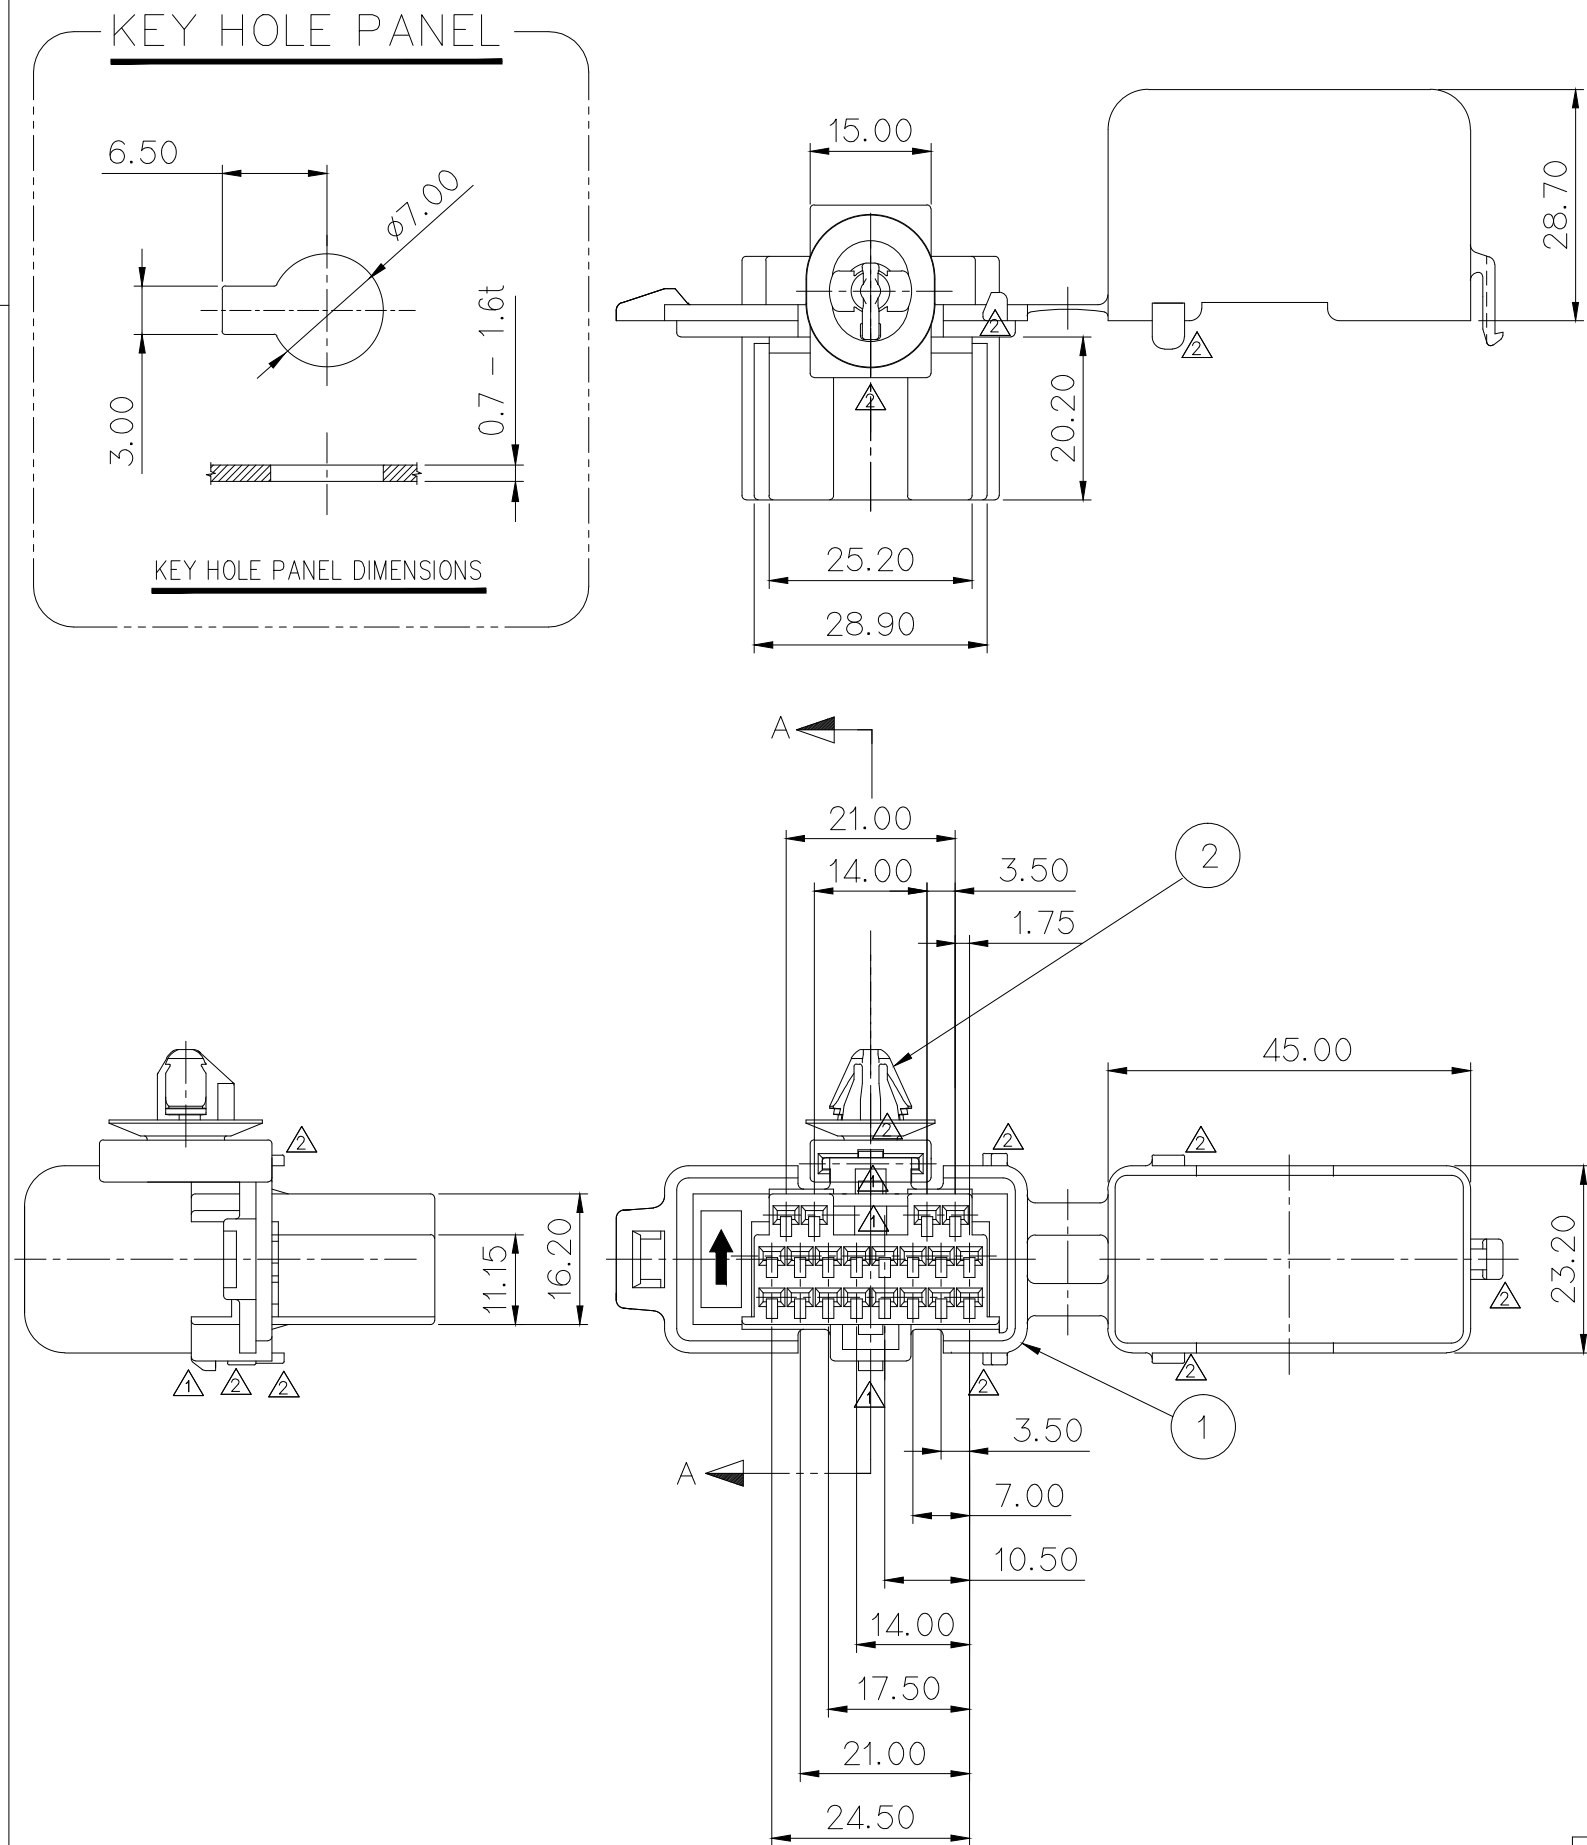

GENERAL TOLERANCE (HOUSING)							USED ON
10 MAX	50 MAX	100 MAX	250 MAX	250 VR	ANGLE	ECCENT	
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	

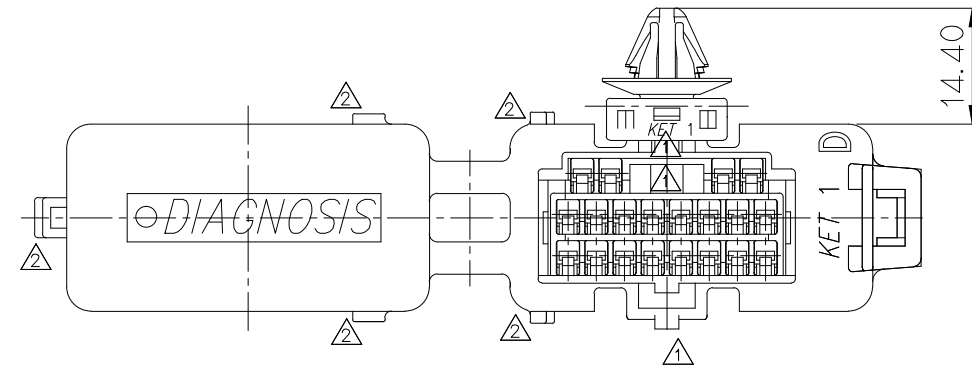


주 기

1. 기능상 유해한 BURR 및 WELDLINE 등이 없을것.
2. 적용 REAR COVER : MG632867
3. 적용 TERMINAL : ST730497,498

NOTE

1. MUST BE FREE OF BURR, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
2. APPLICABLE REAR COVER : MG632867
3. APPLICABLE TERMINAL : ST730497,498

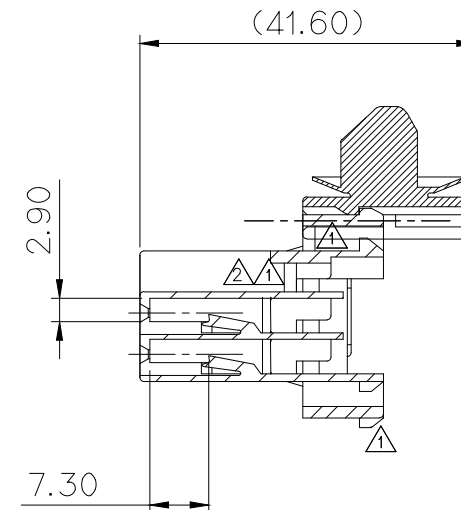

SECTION A-A

APPROVED

2018-12-07

KOREA ELECTRIC
TERMINAL CO., LTD.
Product Development Team 1

ISSUE MARK

KET KOREA ELECTRIC
ENGINEERED TERMINAL CO., LTD.

NO.	PART NO.	PART NAME	MATERIAL	COLOR
①	MG673539-5	DIAGNOSIS 20P HS'G	NYLON66	BLACK
②	MG673361-40	DIAGNOSIS CLIP (ø7 KEY HOLE TYPE)	NYLON66	D/GRAY

						MATERIAL	SEE TABLE	
						FINISH	SEE TABLE	
						WIRE RANGE		CLASS
						INSULATION		TYPE
LTR	REVISION RECORD	DR.	CHK.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SCALE 1/1
DR.	KYM 05.05.08	CHK.				05.08		PART NO. MG653401
CHK.		APP.				08.08		DIAGNOSIS 20F ASS'Y (ø7 KEY HOLE-A)